

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916750

Luminaire Tested: DFN2DIP-PN3F0-080D080US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916750
REPORT IS A COMBINATION OF REPORTS P899592 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-080D080US930-RLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11316.4 lumens
Efficiency: N/A
Efficacy: 80.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 141.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916750

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US930-RLLFLL

Luminous Intensity Polar Plot

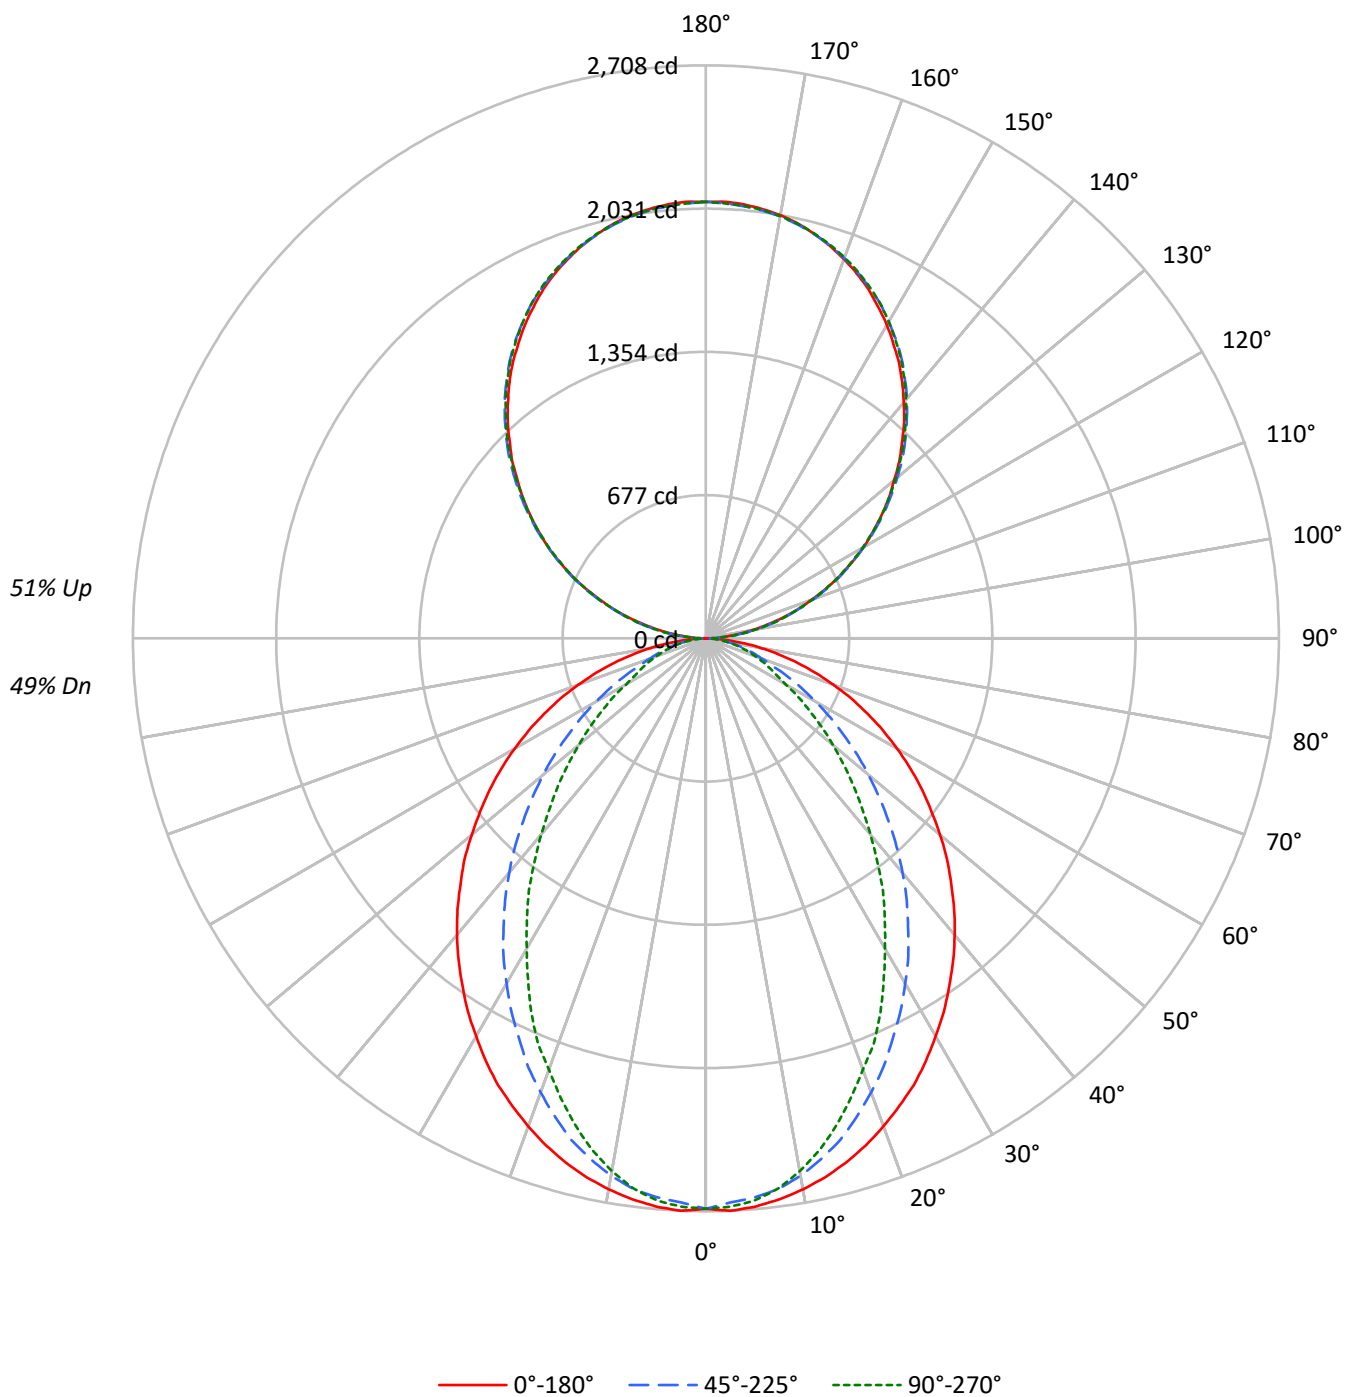

TEST NUMBER: P916750

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3151	3151	3151
5°	3154	3099	3120
10°	3121	3036	3017
15°	3076	2933	2859
20°	3018	2793	2665
25°	2958	2636	2478
30°	2877	2475	2242
35°	2799	2303	2034
40°	2719	2124	1796
45°	2626	1927	1580
50°	2530	1728	1369
55°	2429	1515	1167
60°	2312	1293	959
65°	2178	1067	862
70°	2015	857	778
75°	1810	751	705
80°	1513	623	607
85°	1028	405	448

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2626 cd/sqm

TEST NUMBER: P916750

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US930-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	252.6	2.2
10°-20°	693.6	6.1
20°-30°	973.7	8.6
30°-40°	1061.4	9.4
40°-50°	975.6	8.6
50°-60°	766.2	6.8
60°-70°	498.7	4.4
70°-80°	256.7	2.3
80°-90°	71.4	0.6
90°-100°	127.6	1.1
100°-110°	405.6	3.6
110°-120°	694.1	6.1
120°-130°	912.8	8.1
130°-140°	1024.6	9.1
140°-150°	1004.7	8.9
150°-160°	842.8	7.4
160°-170°	558.9	4.9
170°-180°	195.4	1.7
0°-30°	1919.9	17.0
0°-40°	2981.4	26.3
0°-60°	4723.1	41.7
0°-90°	5549.9	49.0
90°-120°	1227.3	10.8
90°-150°	4169.4	36.8
90°-180°	5766.0	51.0
0°-180°	11316.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2696	2696	2696	2696	2696	
5°	2696	2684	2652	2674	2666	256
15°	2564	2537	2454	2408	2384	722
25°	2327	2249	2088	1988	1952	1070
35°	2005	1881	1666	1513	1459	1255
45°	1639	1476	1220	1046	988	1266
55°	1246	1056	793	646	600	1114
65°	842	644	424	342	334	834
75°	449	278	195	178	176	475
85°	105	54	46	46	46	120
90°	2	22	61	57	59	11
95°	91	108	111	111	108	101
105°	374	379	383	386	386	395
115°	696	706	703	702	696	689
125°	1013	1029	1024	1018	1016	905
135°	1310	1330	1333	1332	1326	1013
145°	1591	1603	1613	1615	1608	994
155°	1819	1824	1830	1838	1833	837
165°	1979	1977	1977	1989	1981	558
175°	2059	2054	2050	2063	2052	196
180°	2063	2063	2063	2063	2063	

TEST NUMBER: P916750

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US930-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2695.7	2695.7	2695.7	2695.7	2695.7
2.5°	2707.9	2695.7	2668.8	2693.3	2688.4
5°	2695.7	2683.6	2651.7	2673.7	2666.4
7.5°	2673.7	2659.2	2625.0	2634.6	2622.4
10°	2644.4	2627.4	2578.7	2571.2	2556.7
12.5°	2608.0	2586.0	2519.9	2505.4	2478.5
15°	2563.9	2537.0	2454.2	2407.9	2383.5
17.5°	2512.7	2473.6	2371.1	2317.6	2278.4
20°	2454.2	2405.3	2283.4	2222.6	2168.7
22.5°	2390.8	2334.6	2193.1	2110.2	2073.7
25°	2327.4	2249.2	2088.2	1988.3	1951.6
27.5°	2251.8	2168.7	1990.6	1876.0	1819.8
30°	2171.3	2078.4	1883.3	1759.0	1693.0
32.5°	2093.1	1980.8	1781.0	1634.5	1573.4
35°	2005.4	1880.9	1666.3	1512.6	1458.7
37.5°	1919.9	1785.7	1558.9	1390.4	1329.6
40°	1829.7	1683.4	1446.6	1273.4	1210.0
42.5°	1737.0	1580.9	1334.5	1153.9	1093.0
45°	1639.4	1475.9	1219.8	1046.4	988.0
47.5°	1546.8	1373.6	1110.1	936.7	883.1
50°	1444.2	1271.1	1002.7	834.2	783.2
52.5°	1344.1	1161.1	900.2	739.2	692.9
55°	1246.5	1056.3	792.8	646.5	600.2
57.5°	1146.6	951.5	697.8	561.2	522.0
60°	1044.1	849.0	597.6	473.4	434.3
62.5°	944.2	749.0	512.3	395.3	375.9
65°	841.7	643.9	424.4	341.7	334.1
67.5°	744.1	546.4	341.7	299.9	292.8
70°	641.6	451.4	282.9	258.5	248.7
72.5°	544.0	363.4	236.6	217.2	212.2
75°	448.8	278.0	195.2	178.1	175.8
77.5°	353.8	197.5	153.8	143.9	139.0
80°	265.8	141.6	117.0	107.4	107.4
82.5°	185.3	95.2	80.5	75.6	75.6
85°	104.8	53.6	46.3	46.3	46.3
87.5°	39.1	19.4	19.4	17.1	17.1
90°	1.9	22.4	61.0	57.2	59.1
92.5°	38.6	52.3	54.1	55.9	55.9
95°	90.8	108.2	111.3	111.3	108.2
97.5°	151.2	167.3	174.1	174.1	174.1
100°	220.8	235.1	240.0	240.0	238.1
102.5°	294.2	304.8	311.5	313.4	311.5
105°	374.4	379.4	383.1	386.2	386.2
107.5°	454.0	461.5	461.5	462.7	454.0
110°	531.1	541.0	541.0	541.0	536.1

TEST NUMBER: P916750

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US930-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	614.4	625.0	623.1	618.2	614.4
115°	696.5	706.5	703.4	701.5	696.5
117.5°	778.0	791.7	782.9	778.0	773.0
120°	860.1	873.8	860.1	860.1	854.4
122.5°	934.7	952.1	943.4	938.4	934.7
125°	1013.0	1028.6	1023.6	1018.0	1016.2
127.5°	1089.6	1108.8	1102.0	1094.5	1089.6
130°	1161.1	1183.4	1180.3	1176.6	1169.8
132.5°	1241.3	1258.7	1260.0	1251.2	1246.3
135°	1310.3	1329.6	1333.3	1331.5	1326.5
137.5°	1387.4	1403.0	1406.1	1404.8	1397.3
140°	1455.2	1470.7	1479.4	1479.4	1472.6
142.5°	1524.9	1540.4	1545.4	1547.3	1540.4
145°	1590.8	1603.2	1613.1	1615.0	1608.2
147.5°	1649.8	1665.4	1672.8	1676.0	1669.2
150°	1710.8	1721.3	1728.2	1733.8	1728.2
152.5°	1764.9	1775.5	1784.2	1791.0	1784.2
155°	1819.0	1824.0	1829.6	1838.3	1832.7
157.5°	1865.6	1869.4	1872.5	1884.9	1876.2
160°	1907.3	1911.1	1912.9	1923.5	1916.0
162.5°	1945.9	1945.9	1947.7	1959.6	1950.8
165°	1978.8	1976.9	1976.9	1989.4	1980.7
167.5°	2008.7	2003.1	2003.1	2015.5	2006.8
170°	2031.1	2026.1	2024.2	2036.7	2026.1
172.5°	2046.6	2041.7	2039.8	2052.2	2041.7
175°	2059.0	2054.1	2050.3	2062.8	2052.2
177.5°	2065.9	2060.9	2057.2	2067.8	2057.2
180°	2062.8	2062.8	2062.8	2062.8	2062.8

TEST NUMBER: P916750

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US930-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.00	11.83	11.98	12.81	14.10	6.97	7.79	7.94	8.77	10.06
	3H	12.68	13.41	13.66	14.40	15.71	8.15	8.89	9.14	9.88	11.19
	4H	13.28	13.97	14.28	14.97	16.29	8.60	9.29	9.59	10.29	11.61
	6H	13.70	14.34	14.70	15.33	16.66	8.91	9.55	9.92	10.55	11.88
	8H	13.82	14.43	14.83	15.44	16.77	9.00	9.61	10.01	10.63	11.95
	12H	13.88	14.46	14.90	15.47	16.82	9.04	9.62	10.06	10.63	11.98
4H	2H	11.02	11.72	12.02	12.71	14.03	7.56	8.26	8.56	9.25	10.57
	3H	12.84	13.42	13.85	14.44	15.77	8.90	9.48	9.91	10.51	11.84
	4H	13.53	14.06	14.55	15.07	16.43	9.45	9.97	10.47	10.99	12.35
	6H	14.04	14.49	15.07	15.53	16.88	9.86	10.31	10.89	11.35	12.70
	8H	14.21	14.63	15.24	15.66	17.03	9.98	10.41	11.01	11.44	12.81
	12H	14.30	14.68	15.35	15.73	17.10	10.05	10.43	11.09	11.47	12.85
8H	4H	13.49	13.92	14.52	14.95	16.32	9.72	10.15	10.75	11.18	12.54
	6H	14.05	14.40	15.11	15.48	16.84	10.23	10.58	11.29	11.66	13.02
	8H	14.27	14.57	15.33	15.63	17.01	10.42	10.73	11.48	11.79	13.17
	12H	14.40	14.67	15.46	15.72	17.15	10.53	10.80	11.60	11.86	13.28
12H	4H	13.45	13.83	14.49	14.87	16.25	9.73	10.11	10.77	11.16	12.53
	6H	14.03	14.34	15.09	15.39	16.78	10.28	10.59	11.34	11.65	13.03
	8H	14.24	14.51	15.31	15.57	16.99	10.48	10.76	11.55	11.81	13.23