

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916751

Luminaire Tested: DFN2DIP-PN3F0-080D080US930-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916751
REPORT IS A COMBINATION OF REPORTS P901112 AND P897955
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-080D080US930-RLONL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 12001.2 lumens
Efficiency: N/A
Efficacy: 84.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 141.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916751
CATALOG NUMBER: DFN2DIP-PN3F0-080D080US930-RLLONL

Luminous Intensity Polar Plot

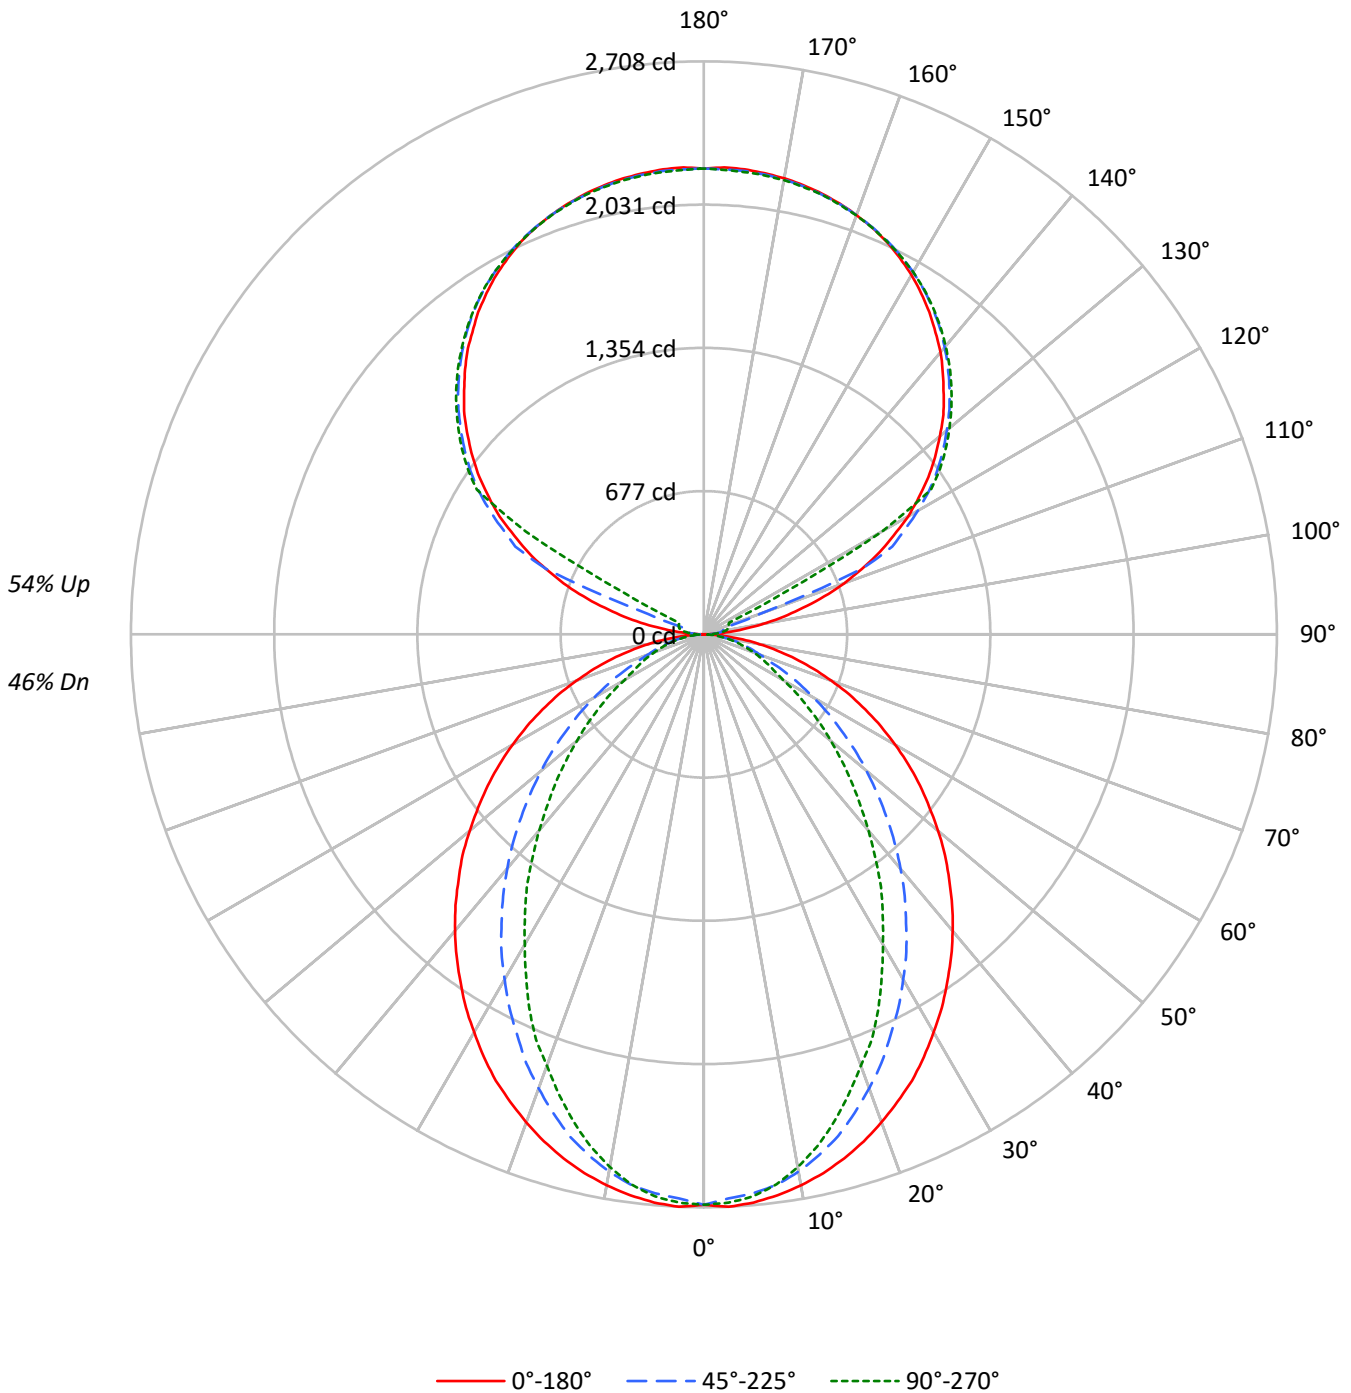



TEST NUMBER: P916751
 CATALOG NUMBER: DFN2DIP-PN3F0-080D080US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53	46			46
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45	40			40
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39	34			34
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34	29			29
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29	26			26
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26	23			23
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23	20			20
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21	18			18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19	16			16
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17	15			15
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15	13			13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3151	3151	3151
5°	3154	3099	3120
10°	3121	3036	3017
15°	3076	2933	2859
20°	3018	2793	2665
25°	2958	2636	2478
30°	2877	2475	2242
35°	2799	2303	2034
40°	2719	2124	1796
45°	2626	1927	1580
50°	2530	1728	1369
55°	2429	1515	1167
60°	2312	1293	959
65°	2178	1067	862
70°	2015	857	778
75°	1810	751	705
80°	1513	623	607
85°	1028	405	448

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2626 cd/sqm



TEST NUMBER: P916751

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US930-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	252.6	2.1
10°-20°	693.6	5.8
20°-30°	973.7	8.1
30°-40°	1061.4	8.8
40°-50°	975.6	8.1
50°-60°	766.2	6.4
60°-70°	498.7	4.2
70°-80°	256.7	2.1
80°-90°	69.4	0.6
90°-100°	72.6	0.6
100°-110°	270.6	2.3
110°-120°	717.6	6.0
120°-130°	1190.2	9.9
130°-140°	1264.3	10.5
140°-150°	1175.0	9.8
150°-160°	944.7	7.9
160°-170°	608.7	5.1
170°-180°	209.5	1.7
0°-30°	1919.9	16.0
0°-40°	2981.4	24.8
0°-60°	4723.1	39.4
0°-90°	5547.9	46.2
90°-120°	1060.8	8.8
90°-150°	4690.4	39.1
90°-180°	6453.0	53.8
0°-180°	12001.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2696	2696	2696	2696	2696	
5°	2696	2684	2652	2674	2666	256
15°	2564	2537	2454	2408	2384	722
25°	2327	2249	2088	1988	1952	1070
35°	2005	1881	1666	1513	1459	1255
45°	1639	1476	1220	1046	988	1266
55°	1246	1056	793	646	600	1114
65°	842	644	424	342	334	834
75°	449	278	195	178	176	475
85°	105	54	46	46	46	120
90°	2	19	32	40	43	11
95°	104	51	62	70	68	123
105°	484	532	97	115	121	517
115°	916	943	983	245	131	902
125°	1295	1316	1346	1357	1362	1155
135°	1602	1628	1642	1658	1655	1238
145°	1859	1857	1884	1895	1887	1163
155°	2047	2032	2052	2061	2048	943
165°	2157	2147	2152	2163	2152	609
175°	2206	2195	2198	2209	2193	210
180°	2201	2201	2201	2201	2201	



TEST NUMBER: P916751

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2695.7	2695.7	2695.7	2695.7	2695.7
2.5°	2707.9	2695.7	2668.8	2693.3	2688.4
5°	2695.7	2683.6	2651.7	2673.7	2666.4
7.5°	2673.7	2659.2	2625.0	2634.6	2622.4
10°	2644.4	2627.4	2578.7	2571.2	2556.7
12.5°	2608.0	2586.0	2519.9	2505.4	2478.5
15°	2563.9	2537.0	2454.2	2407.9	2383.5
17.5°	2512.7	2473.6	2371.1	2317.6	2278.4
20°	2454.2	2405.3	2283.4	2222.6	2168.7
22.5°	2390.8	2334.6	2193.1	2110.2	2073.7
25°	2327.4	2249.2	2088.2	1988.3	1951.6
27.5°	2251.8	2168.7	1990.6	1876.0	1819.8
30°	2171.3	2078.4	1883.3	1759.0	1693.0
32.5°	2093.1	1980.8	1781.0	1634.5	1573.4
35°	2005.4	1880.9	1666.3	1512.6	1458.7
37.5°	1919.9	1785.7	1558.9	1390.4	1329.6
40°	1829.7	1683.4	1446.6	1273.4	1210.0
42.5°	1737.0	1580.9	1334.5	1153.9	1093.0
45°	1639.4	1475.9	1219.8	1046.4	988.0
47.5°	1546.8	1373.6	1110.1	936.7	883.1
50°	1444.2	1271.1	1002.7	834.2	783.2
52.5°	1344.1	1161.1	900.2	739.2	692.9
55°	1246.5	1056.3	792.8	646.5	600.2
57.5°	1146.6	951.5	697.8	561.2	522.0
60°	1044.1	849.0	597.6	473.4	434.3
62.5°	944.2	749.0	512.3	395.3	375.9
65°	841.7	643.9	424.4	341.7	334.1
67.5°	744.1	546.4	341.7	299.9	292.8
70°	641.6	451.4	282.9	258.5	248.7
72.5°	544.0	363.4	236.6	217.2	212.2
75°	448.8	278.0	195.2	178.1	175.8
77.5°	353.8	197.5	153.8	143.9	139.0
80°	265.8	141.6	117.0	107.4	107.4
82.5°	185.3	95.2	80.5	75.6	75.6
85°	104.8	53.6	46.3	46.3	46.3
87.5°	39.1	19.4	19.4	17.1	17.1
90°	1.5	19.1	31.8	39.9	43.0
92.5°	39.9	33.5	38.2	41.4	43.0
95°	103.5	50.9	62.0	70.2	68.5
97.5°	186.3	55.8	81.1	86.1	87.6
100°	282.0	63.8	90.8	103.5	106.6
102.5°	387.0	383.9	94.0	111.4	116.3
105°	484.2	532.1	97.2	114.6	121.1
107.5°	597.3	637.0	100.4	117.8	124.3
110°	705.7	739.0	278.8	119.5	125.8



TEST NUMBER: P916751

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US930-RLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	807.6	836.2	809.2	122.5	127.5
115°	915.8	942.9	982.8	245.3	130.7
117.5°	1009.8	1041.6	1068.9	840.9	423.7
120°	1115.0	1138.8	1167.6	1186.7	971.6
122.5°	1204.0	1229.6	1261.6	1271.0	1272.8
125°	1294.9	1315.6	1345.9	1357.1	1361.8
127.5°	1377.7	1400.0	1424.1	1439.9	1441.4
130°	1455.8	1481.3	1498.8	1516.4	1514.8
132.5°	1535.5	1556.2	1573.7	1588.0	1586.5
135°	1602.4	1627.9	1642.1	1658.2	1655.0
137.5°	1672.4	1691.5	1707.6	1723.5	1718.7
140°	1740.8	1753.7	1771.2	1785.5	1777.5
142.5°	1798.4	1809.5	1830.1	1842.8	1834.8
145°	1858.9	1857.2	1884.2	1895.4	1887.4
147.5°	1911.3	1906.6	1933.6	1941.6	1935.3
150°	1962.3	1951.2	1976.7	1986.1	1978.2
152.5°	2005.3	1992.6	2016.4	2026.1	2014.9
155°	2046.7	2032.5	2051.6	2061.1	2048.4
157.5°	2080.2	2067.5	2081.9	2093.0	2080.2
160°	2108.9	2099.3	2108.9	2118.4	2107.2
162.5°	2134.3	2124.8	2132.7	2143.9	2129.6
165°	2156.6	2147.2	2151.9	2163.0	2151.9
167.5°	2174.2	2164.5	2169.4	2180.6	2166.2
170°	2188.6	2178.9	2182.1	2193.3	2178.9
172.5°	2198.0	2188.6	2191.8	2202.9	2188.6
175°	2206.0	2194.8	2198.0	2209.1	2193.3
177.5°	2209.1	2198.0	2199.7	2210.8	2196.5
180°	2201.2	2201.2	2201.2	2201.2	2201.2



TEST NUMBER: P916751
 CATALOG NUMBER: DFN2DIP-PN3F0-080D080US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.73	11.53	11.73	12.54	13.86	6.70	7.50	7.69	8.50	9.83
	3H	12.40	13.12	13.41	14.13	15.48	7.88	8.59	8.89	9.61	10.95
	4H	13.01	13.68	14.02	14.70	16.05	8.32	9.00	9.34	10.02	11.37
	6H	13.42	14.04	14.45	15.06	16.43	8.64	9.26	9.67	10.28	11.65
	8H	13.54	14.14	14.58	15.17	16.53	8.73	9.32	9.76	10.35	11.72
	12H	13.60	14.16	14.64	15.19	16.58	8.77	9.33	9.80	10.36	11.74
4H	2H	10.75	11.42	11.77	12.44	13.79	7.29	7.96	8.31	8.98	10.33
	3H	12.57	13.13	13.60	14.17	15.54	8.63	9.19	9.66	10.23	11.60
	4H	13.25	13.77	14.29	14.80	16.19	9.17	9.68	10.21	10.72	12.11
	6H	13.76	14.20	14.81	15.26	16.65	9.58	10.02	10.63	11.08	12.47
	8H	13.93	14.34	14.98	15.39	16.80	9.71	10.12	10.76	11.17	12.57
	12H	14.02	14.39	15.09	15.46	16.87	9.77	10.14	10.83	11.20	12.61
8H	4H	13.22	13.63	14.27	14.68	16.08	9.44	9.86	10.50	10.91	12.31
	6H	13.77	14.11	14.85	15.21	16.61	9.95	10.29	11.03	11.39	12.79
	8H	13.99	14.29	15.07	15.36	16.78	10.14	10.44	11.22	11.52	12.93
	12H	14.12	14.38	15.20	15.45	16.91	10.25	10.52	11.34	11.59	13.05
12H	4H	13.17	13.54	14.23	14.60	16.01	9.45	9.82	10.52	10.88	12.29
	6H	13.75	14.05	14.83	15.12	16.54	10.00	10.30	11.08	11.38	12.80
	8H	13.96	14.23	15.05	15.30	16.76	10.20	10.47	11.29	11.54	13.00