

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P919330

Luminaire Tested: DFN2DIP-PN3F0-030D060US935-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P919330
REPORT IS A COMBINATION OF REPORTS P899554 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-030D060US935-RLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6767.4 lumens
Efficiency: N/A
Efficacy: 96.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 69.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P919330

CATALOG NUMBER: DFN2DIP-PN3F0-030D060US935-RLLFLL

Luminous Intensity Polar Plot

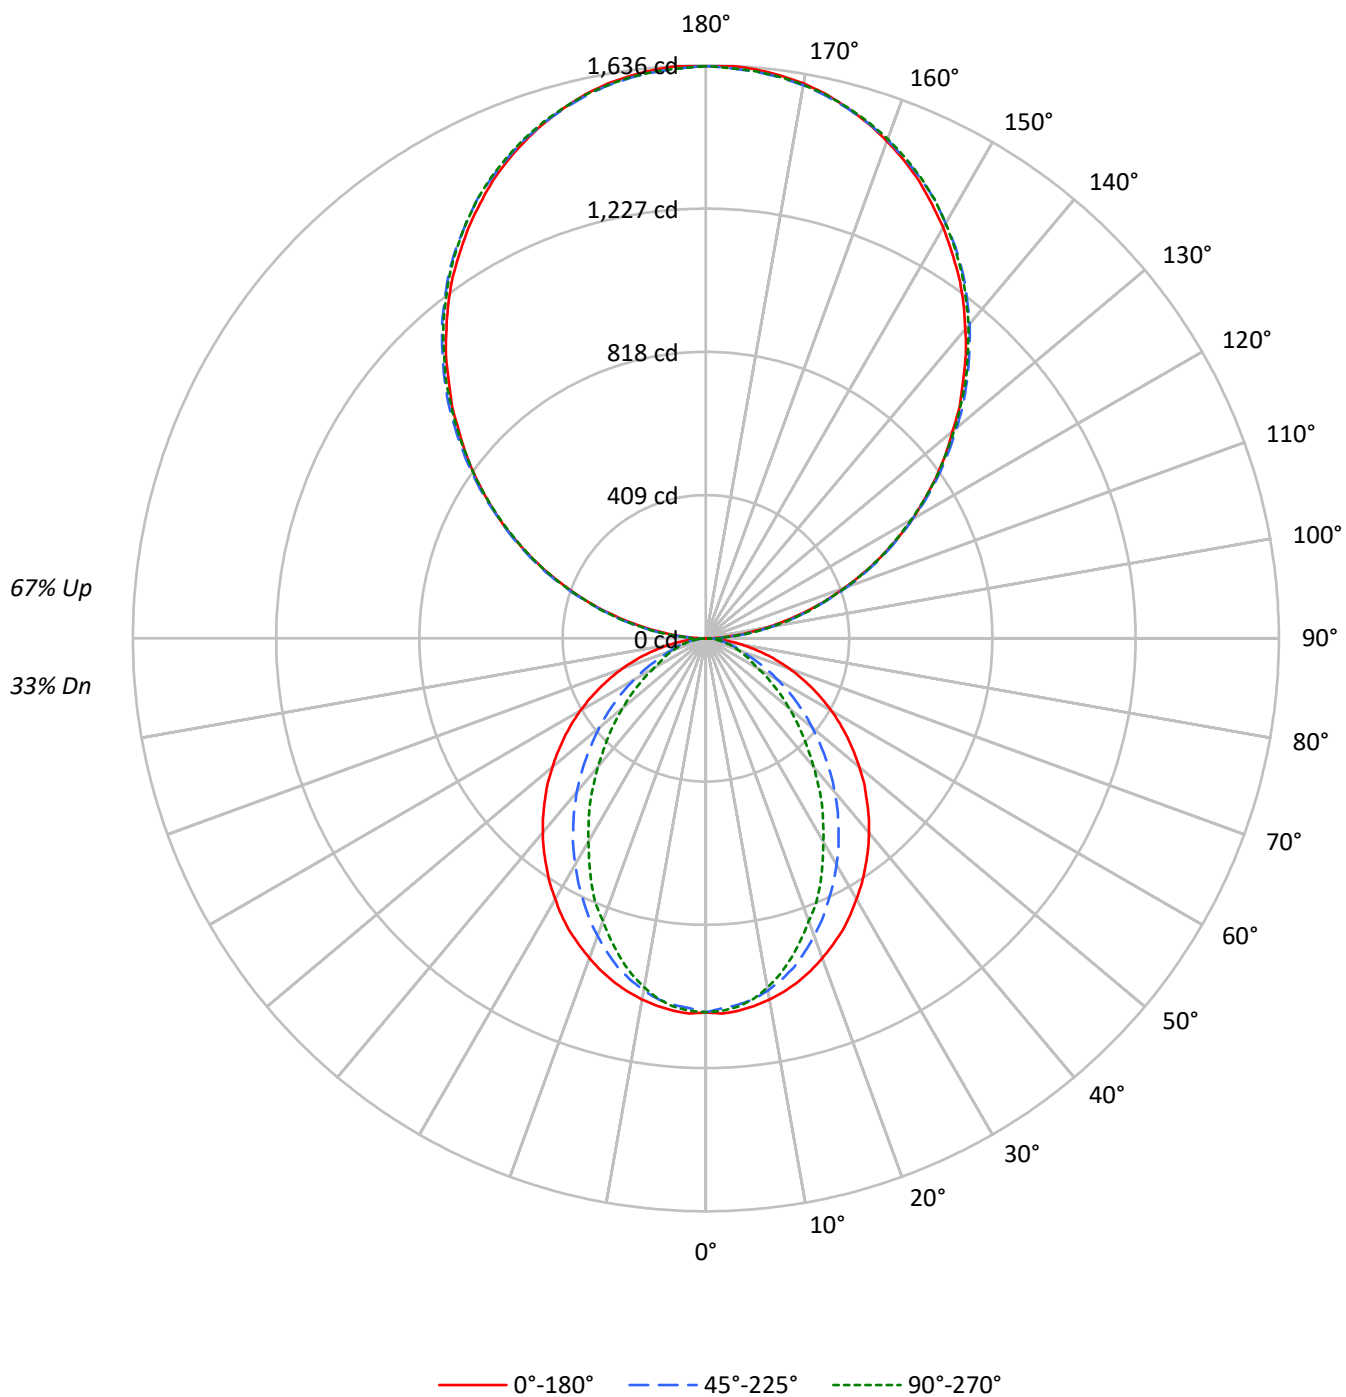

TEST NUMBER: P919330

CATALOG NUMBER: DFN2DIP-PN3F0-030D060US935-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	79	73	68	77	71	67	62	57	54	51	44	42	40	32	31	29
3	79	70	63	57	71	63	57	52	51	46	43	39	36	34	29	27	25
4	72	62	54	49	65	56	50	45	45	41	37	35	32	29	26	24	22
5	66	55	47	42	59	50	43	38	40	36	32	32	28	26	23	21	19
6	61	49	42	36	55	45	38	33	36	32	28	29	25	23	21	19	17
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	19	17	15
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13
10	45	34	27	22	41	31	25	21	25	21	18	20	17	15	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1248	1248	1248
5°	1249	1227	1235
10°	1236	1202	1195
15°	1218	1162	1132
20°	1195	1106	1055
25°	1171	1044	981
30°	1140	980	888
35°	1108	912	805
40°	1077	841	711
45°	1040	763	626
50°	1002	684	542
55°	962	600	462
60°	916	512	380
65°	862	423	341
70°	798	339	308
75°	717	297	279
80°	600	247	240
85°	407	160	177

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1619 cd/sqm

TEST NUMBER: P919330

CATALOG NUMBER: DFN2DIP-PN3F0-030D060US935-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.1	1.5
10°-20°	274.7	4.1
20°-30°	385.6	5.7
30°-40°	420.3	6.2
40°-50°	386.3	5.7
50°-60°	303.4	4.5
60°-70°	197.5	2.9
70°-80°	101.7	1.5
80°-90°	30.6	0.5
90°-100°	101.1	1.5
100°-110°	321.2	4.7
110°-120°	549.7	8.1
120°-130°	723.0	10.7
130°-140°	811.5	12.0
140°-150°	795.8	11.8
150°-160°	667.5	9.9
160°-170°	442.7	6.5
170°-180°	154.7	2.3
0°-30°	760.3	11.2
0°-40°	1180.7	17.4
0°-60°	1870.4	27.6
0°-90°	2200.2	32.5
90°-120°	972.0	14.4
90°-150°	3302.3	48.8
90°-180°	4567.0	67.5
0°-180°	6767.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1068	1068	1068	1068	1068	
5°	1068	1063	1050	1059	1056	101
15°	1015	1005	972	954	944	286
25°	922	891	827	787	773	424
35°	794	745	660	599	578	497
45°	649	584	483	414	391	501
55°	494	418	314	256	238	441
65°	333	255	168	135	132	330
75°	178	110	77	70	70	188
85°	42	21	18	18	18	48
90°	2	18	48	45	47	7
95°	72	86	88	88	86	80
105°	296	300	303	306	306	313
115°	552	560	557	556	552	546
125°	802	815	811	806	805	717
135°	1038	1053	1056	1055	1051	802
145°	1260	1270	1278	1279	1274	787
155°	1441	1445	1449	1456	1452	663
165°	1567	1566	1566	1576	1569	442
175°	1631	1627	1624	1634	1625	155
180°	1634	1634	1634	1634	1634	

TEST NUMBER: P919330

CATALOG NUMBER: DFN2DIP-PN3F0-030D060US935-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1067.6	1067.6	1067.6	1067.6	1067.6
2.5°	1072.4	1067.6	1056.9	1066.6	1064.7
5°	1067.6	1062.7	1050.2	1058.9	1055.9
7.5°	1058.9	1053.1	1039.6	1043.4	1038.5
10°	1047.2	1040.5	1021.2	1018.2	1012.5
12.5°	1032.8	1024.1	998.0	992.2	981.5
15°	1015.4	1004.7	971.9	953.6	943.9
17.5°	995.1	979.6	939.0	917.8	902.3
20°	971.9	952.5	904.2	880.2	858.8
22.5°	946.8	924.5	868.5	835.7	821.2
25°	921.7	890.7	827.0	787.4	772.8
27.5°	891.7	858.8	788.3	743.0	720.7
30°	859.9	823.1	745.8	696.6	670.5
32.5°	828.9	784.5	705.3	647.3	623.1
35°	794.2	744.8	659.9	599.0	577.7
37.5°	760.3	707.1	617.3	550.6	526.6
40°	724.6	666.7	572.9	504.3	479.2
42.5°	687.9	626.1	528.5	456.9	432.8
45°	649.3	584.4	483.1	414.4	391.2
47.5°	612.5	544.0	439.6	370.9	349.7
50°	572.0	503.3	397.1	330.4	310.1
52.5°	532.3	459.9	356.5	292.7	274.4
55°	493.6	418.3	313.9	256.1	237.7
57.5°	454.1	376.8	276.4	222.2	206.7
60°	413.5	336.2	236.7	187.4	172.0
62.5°	373.9	296.6	202.9	156.5	148.9
65°	333.3	255.0	168.1	135.3	132.3
67.5°	294.7	216.4	135.3	118.8	115.9
70°	254.1	178.7	112.0	102.4	98.5
72.5°	215.4	143.9	93.7	86.0	84.0
75°	177.7	110.1	77.3	70.5	69.6
77.5°	140.1	78.2	60.9	57.0	55.0
80°	105.3	56.1	46.3	42.5	42.5
82.5°	73.4	37.7	31.9	30.0	30.0
85°	41.5	21.2	18.3	18.3	18.3
87.5°	15.5	7.7	7.7	6.8	6.8
90°	1.5	17.7	48.3	45.3	46.8
92.5°	30.6	41.4	42.9	44.3	44.3
95°	71.9	85.7	88.2	88.2	85.7
97.5°	119.7	132.5	137.9	137.9	137.9
100°	174.9	186.1	190.1	190.1	188.6
102.5°	233.0	241.3	246.8	248.2	246.8
105°	296.5	300.5	303.4	305.9	305.9
107.5°	359.6	365.5	365.5	366.4	359.6
110°	420.7	428.5	428.5	428.5	424.6

TEST NUMBER: P919330

CATALOG NUMBER: DFN2DIP-PN3F0-030D060US935-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	486.6	495.0	493.5	489.6	486.6
115°	551.6	559.6	557.1	555.6	551.6
117.5°	616.2	627.1	620.1	616.2	612.3
120°	681.2	692.1	681.2	681.2	676.7
122.5°	740.3	754.1	747.2	743.3	740.3
125°	802.4	814.7	810.7	806.3	804.9
127.5°	863.0	878.2	872.8	866.9	863.0
130°	919.6	937.4	934.9	931.9	926.5
132.5°	983.2	996.9	997.9	991.0	987.0
135°	1037.8	1053.1	1056.0	1054.6	1050.6
137.5°	1098.9	1111.2	1113.7	1112.7	1106.8
140°	1152.6	1164.9	1171.8	1171.8	1166.4
142.5°	1207.7	1220.0	1224.0	1225.5	1220.0
145°	1260.0	1269.8	1277.7	1279.2	1273.8
147.5°	1306.7	1319.0	1325.0	1327.4	1322.0
150°	1355.0	1363.4	1368.8	1373.2	1368.8
152.5°	1397.8	1406.3	1413.2	1418.6	1413.2
155°	1440.7	1444.7	1449.1	1456.0	1451.6
157.5°	1477.6	1480.7	1483.1	1493.0	1486.1
160°	1510.7	1513.6	1515.1	1523.4	1517.6
162.5°	1541.2	1541.2	1542.6	1552.0	1545.1
165°	1567.3	1565.8	1565.8	1575.7	1568.8
167.5°	1591.0	1586.6	1586.6	1596.4	1589.5
170°	1608.7	1604.7	1603.3	1613.1	1604.7
172.5°	1621.0	1617.0	1615.6	1625.4	1617.0
175°	1630.8	1626.9	1623.9	1633.8	1625.4
177.5°	1636.2	1632.4	1629.4	1637.7	1629.4
180°	1633.8	1633.8	1633.8	1633.8	1633.8

TEST NUMBER: P919330

CATALOG NUMBER: DFN2DIP-PN3F0-030D060US935-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.98	6.68	7.08	7.77	9.28	1.94	2.65	3.04	3.74	5.24
	3H	7.64	8.27	8.75	9.37	10.89	3.11	3.75	4.22	4.85	6.37
	4H	8.24	8.83	9.35	9.94	11.46	3.55	4.15	4.67	5.26	6.78
	6H	8.65	9.20	9.77	10.30	11.84	3.86	4.41	4.99	5.52	7.06
	8H	8.77	9.29	9.90	10.41	11.94	3.95	4.47	5.08	5.59	7.12
	12H	8.82	9.32	9.96	10.43	11.99	3.98	4.48	5.12	5.60	7.15
4H	2H	5.98	6.58	7.10	7.68	9.20	2.52	3.12	3.64	4.22	5.74
	3H	7.79	8.29	8.92	9.41	10.95	3.85	4.35	4.98	5.48	7.01
	4H	8.47	8.93	9.60	10.05	11.60	4.39	4.85	5.52	5.96	7.52
	6H	8.97	9.36	10.11	10.51	12.06	4.79	5.19	5.93	6.33	7.88
	8H	9.14	9.51	10.28	10.64	12.21	4.92	5.28	6.06	6.42	7.98
	12H	9.23	9.56	10.38	10.70	12.27	4.97	5.30	6.13	6.45	8.02
8H	4H	8.43	8.79	9.57	9.93	11.49	4.66	5.02	5.80	6.15	7.72
	6H	8.98	9.28	10.14	10.46	12.02	5.16	5.46	6.32	6.64	8.20
	8H	9.19	9.46	10.36	10.61	12.19	5.35	5.61	6.51	6.76	8.35
	12H	9.32	9.55	10.49	10.71	12.32	5.46	5.69	6.63	6.84	8.46
12H	4H	8.37	8.70	9.53	9.85	11.42	4.65	4.98	5.81	6.13	7.70
	6H	8.96	9.22	10.12	10.37	11.96	5.21	5.47	6.37	6.63	8.21
	8H	9.17	9.40	10.34	10.55	12.17	5.41	5.64	6.58	6.79	8.41

END OF REPORT