

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922080

Luminaire Tested: DFN2DIP-PN3F0-040D050US940-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922080
REPORT IS A COMBINATION OF REPORTS P899541 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-040D050US940-FLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7477.0 lumens
Efficiency: N/A
Efficacy: 103.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 72.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922080

CATALOG NUMBER: DFN2DIP-PN3F0-040D050US940-FLLFLL

Luminous Intensity Polar Plot

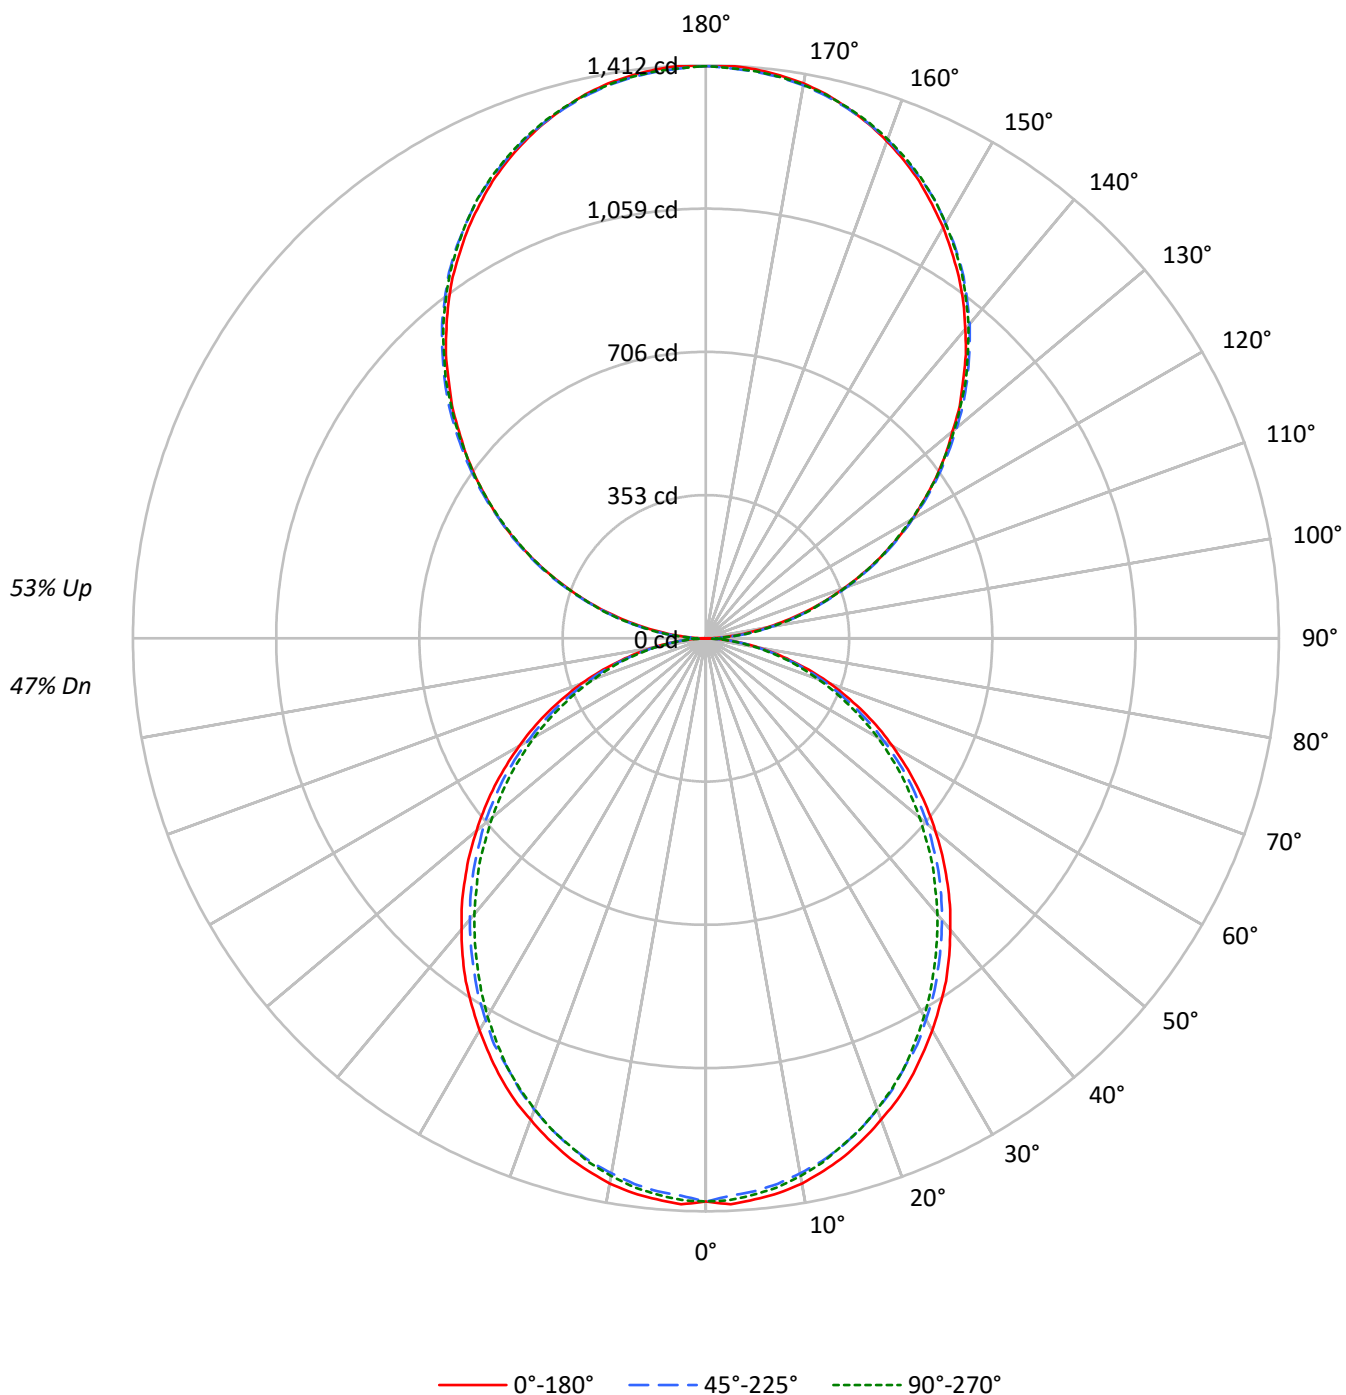

TEST NUMBER: P922080

CATALOG NUMBER: DFN2DIP-PN3F0-040D050US940-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	54	54	54
1	97	93	89	85	89	85	82	79	72	69	67	59	57	56	47	46	45
2	88	81	75	70	81	75	69	65	63	59	56	52	49	47	42	40	38
3	81	71	64	58	74	66	59	54	55	51	47	46	42	39	37	35	32
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28
5	68	56	48	42	62	52	45	39	44	39	34	37	33	29	30	27	24
6	62	50	42	37	57	47	40	34	40	34	30	33	29	26	27	24	21
7	58	45	38	32	53	42	35	30	36	30	26	30	26	23	25	21	19
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	19	17
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15
10	47	35	27	23	43	32	26	21	28	22	19	23	19	16	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1622	1622	1622
5°	1624	1599	1610
10°	1610	1576	1587
15°	1585	1549	1553
20°	1552	1512	1517
25°	1519	1467	1476
30°	1479	1426	1424
35°	1440	1378	1369
40°	1392	1329	1317
45°	1345	1279	1263
50°	1293	1228	1201
55°	1238	1168	1144
60°	1176	1097	1079
65°	1109	1024	1002
70°	1023	934	918
75°	904	826	841
80°	760	689	694
85°	537	456	452

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1398 cd/sqm

TEST NUMBER: P922080

CATALOG NUMBER: DFN2DIP-PN3F0-040D050US940-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	130.6	1.7
10°-20°	367.5	4.9
20°-30°	540.1	7.2
30°-40°	627.3	8.4
40°-50°	626.6	8.4
50°-60°	546.3	7.3
60°-70°	403.9	5.4
70°-80°	228.5	3.1
80°-90°	64.3	0.9
90°-100°	87.3	1.2
100°-110°	277.2	3.7
110°-120°	474.5	6.3
120°-130°	624.0	8.3
130°-140°	700.4	9.4
140°-150°	686.8	9.2
150°-160°	576.1	7.7
160°-170°	382.1	5.1
170°-180°	133.5	1.8
0°-30°	1038.3	13.9
0°-40°	1665.6	22.3
0°-60°	2838.5	38.0
0°-90°	3535.2	47.3
90°-120°	838.9	11.2
90°-150°	2850.1	38.1
90°-180°	3942.0	52.7
0°-180°	7477.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1388	1388	1388	1388	1388	
5°	1388	1383	1368	1378	1376	132
15°	1321	1313	1296	1301	1295	372
25°	1196	1185	1162	1165	1162	550
35°	1032	1018	997	989	982	644
45°	840	830	810	796	790	648
55°	635	627	611	595	589	568
65°	428	420	407	395	388	424
75°	224	222	215	207	210	239
85°	55	53	52	48	47	61
90°	1	15	42	39	40	7
95°	62	74	76	76	74	69
105°	256	259	262	264	264	270
115°	476	483	481	480	476	471
125°	692	703	700	696	695	619
135°	896	909	911	910	907	692
145°	1087	1096	1103	1104	1099	679
155°	1243	1247	1251	1257	1253	572
165°	1353	1351	1351	1360	1354	382
175°	1408	1404	1402	1410	1403	134
180°	1410	1410	1410	1410	1410	

TEST NUMBER: P922080

CATALOG NUMBER: DFN2DIP-PN3F0-040D050US940-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1387.9	1387.9	1387.9	1387.9	1387.9
2.5°	1396.0	1389.3	1374.6	1387.9	1385.4
5°	1387.9	1382.6	1367.9	1378.5	1376.0
7.5°	1378.5	1370.6	1355.8	1366.6	1364.0
10°	1364.0	1354.6	1338.6	1349.2	1345.2
12.5°	1343.8	1335.9	1319.9	1326.6	1323.8
15°	1321.2	1313.2	1295.8	1301.2	1294.6
17.5°	1293.2	1285.2	1267.8	1274.4	1267.8
20°	1262.4	1254.5	1235.8	1239.7	1234.6
22.5°	1231.8	1219.8	1202.4	1202.4	1199.7
25°	1195.7	1185.1	1162.4	1165.0	1162.4
27.5°	1155.7	1146.3	1129.1	1125.1	1118.5
30°	1115.7	1105.0	1085.0	1081.0	1075.7
32.5°	1073.0	1065.1	1043.7	1035.6	1030.2
35°	1031.6	1018.3	996.9	988.9	982.2
37.5°	984.9	972.9	951.5	942.2	935.5
40°	936.9	926.1	904.7	892.9	887.5
42.5°	890.2	879.4	858.2	844.7	836.8
45°	839.5	830.2	810.0	795.5	790.1
47.5°	790.1	780.7	759.4	744.7	736.7
50°	738.0	731.3	712.7	693.9	687.2
52.5°	687.2	678.0	660.7	646.0	636.6
55°	635.3	627.2	611.3	595.2	588.6
57.5°	583.2	576.6	559.1	543.1	537.8
60°	531.1	525.8	507.2	492.5	488.5
62.5°	480.5	471.1	457.8	444.4	439.1
65°	428.5	420.4	407.1	395.0	388.4
67.5°	375.1	368.3	356.4	347.1	341.7
70°	325.7	320.3	308.3	298.9	293.6
72.5°	275.0	269.6	263.0	253.6	249.6
75°	224.2	221.6	214.8	206.9	209.6
77.5°	178.8	173.4	170.8	166.7	162.8
80°	133.5	132.1	129.4	125.5	122.8
82.5°	90.8	90.8	89.5	84.1	84.1
85°	54.7	53.4	52.1	48.0	46.7
87.5°	24.1	21.4	18.7	14.7	13.3
90°	1.2	15.3	41.6	39.1	40.4
92.5°	26.4	35.7	37.0	38.3	38.3
95°	62.1	74.0	76.1	76.1	74.0
97.5°	103.3	114.3	119.0	119.0	119.0
100°	150.9	160.7	164.1	164.1	162.8
102.5°	201.1	208.3	212.9	214.3	212.9
105°	255.9	259.3	261.9	263.9	263.9
107.5°	310.3	315.4	315.4	316.3	310.3
110°	363.0	369.9	369.9	369.9	366.4

TEST NUMBER: P922080

CATALOG NUMBER: DFN2DIP-PN3F0-040D050US940-FLLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	420.0	427.2	426.0	422.6	420.0
115°	476.1	483.0	480.8	479.6	476.1
117.5°	531.8	541.2	535.2	531.8	528.4
120°	587.9	597.3	587.9	587.9	584.1
122.5°	638.9	650.9	644.9	641.5	638.9
125°	692.5	703.1	699.7	695.9	694.6
127.5°	744.8	758.0	753.3	748.1	744.8
130°	793.7	809.0	806.8	804.3	799.6
132.5°	848.6	860.4	861.3	855.3	851.9
135°	895.7	908.8	911.4	910.2	906.8
137.5°	948.4	959.0	961.2	960.3	955.2
140°	994.7	1005.4	1011.3	1011.3	1006.7
142.5°	1042.3	1053.0	1056.4	1057.7	1053.0
145°	1087.4	1095.9	1102.7	1104.0	1099.3
147.5°	1127.8	1138.4	1143.5	1145.7	1140.9
150°	1169.5	1176.7	1181.3	1185.2	1181.3
152.5°	1206.5	1213.7	1219.6	1224.3	1219.6
155°	1243.4	1246.8	1250.6	1256.6	1252.8
157.5°	1275.3	1277.8	1280.0	1288.5	1282.5
160°	1303.8	1306.4	1307.6	1314.8	1309.7
162.5°	1330.2	1330.2	1331.4	1339.5	1333.6
165°	1352.7	1351.4	1351.4	1359.9	1354.0
167.5°	1373.1	1369.2	1369.2	1377.8	1371.8
170°	1388.4	1385.0	1383.8	1392.2	1385.0
172.5°	1399.0	1395.6	1394.4	1402.8	1395.6
175°	1407.6	1404.1	1401.6	1410.1	1402.8
177.5°	1412.2	1408.8	1406.2	1413.5	1406.2
180°	1410.1	1410.1	1410.1	1410.1	1410.1

TEST NUMBER: P922080

CATALOG NUMBER: DFN2DIP-PN3F0-040D050US940-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.66	9.49	9.64	10.49	11.80	8.22	9.05	9.20	10.05	11.36
	3H	10.31	11.06	11.30	12.06	13.39	9.83	10.58	10.82	11.58	12.91
	4H	10.89	11.60	11.90	12.61	13.95	10.41	11.12	11.41	12.12	13.46
	6H	11.28	11.94	12.30	12.95	14.30	10.79	11.45	11.81	12.46	13.81
	8H	11.39	12.01	12.41	13.04	14.39	10.90	11.52	11.92	12.55	13.89
	12H	11.43	12.03	12.46	13.05	14.42	10.93	11.53	11.96	12.55	13.92
4H	2H	9.11	9.82	10.12	10.83	12.17	8.76	9.47	9.77	10.48	11.82
	3H	10.97	11.56	11.99	12.60	13.95	10.57	11.16	11.58	12.19	13.55
	4H	11.68	12.22	12.70	13.25	14.62	11.26	11.80	12.29	12.83	14.20
	6H	12.18	12.65	13.22	13.70	15.07	11.76	12.23	12.80	13.28	14.65
	8H	12.33	12.77	13.37	13.81	15.20	11.90	12.34	12.94	13.38	14.77
	12H	12.40	12.79	13.46	13.85	15.24	11.96	12.36	13.02	13.41	14.81
8H	4H	11.87	12.30	12.90	13.35	14.73	11.50	11.93	12.53	12.98	14.36
	6H	12.49	12.85	13.55	13.93	15.32	12.11	12.47	13.18	13.56	14.94
	8H	12.71	13.02	13.77	14.09	15.50	12.32	12.64	13.39	13.71	15.11
	12H	12.83	13.11	13.91	14.18	15.62	12.43	12.71	13.50	13.78	15.22
12H	4H	11.85	12.24	12.91	13.30	14.69	11.49	11.88	12.54	12.94	14.33
	6H	12.52	12.83	13.59	13.90	15.31	12.15	12.47	13.22	13.54	14.94
	8H	12.75	13.03	13.83	14.10	15.54	12.38	12.66	13.46	13.73	15.17