

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922194

Luminaire Tested: DFN2DIP-PN3F0-080D050US940-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922194
REPORT IS A COMBINATION OF REPORTS P899550 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-080D050US940-RLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10009.5 lumens
Efficiency: N/A
Efficacy: 85.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 117.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922194

CATALOG NUMBER: DFN2DIP-PN3F0-080D050US940-RLLFLL

Luminous Intensity Polar Plot

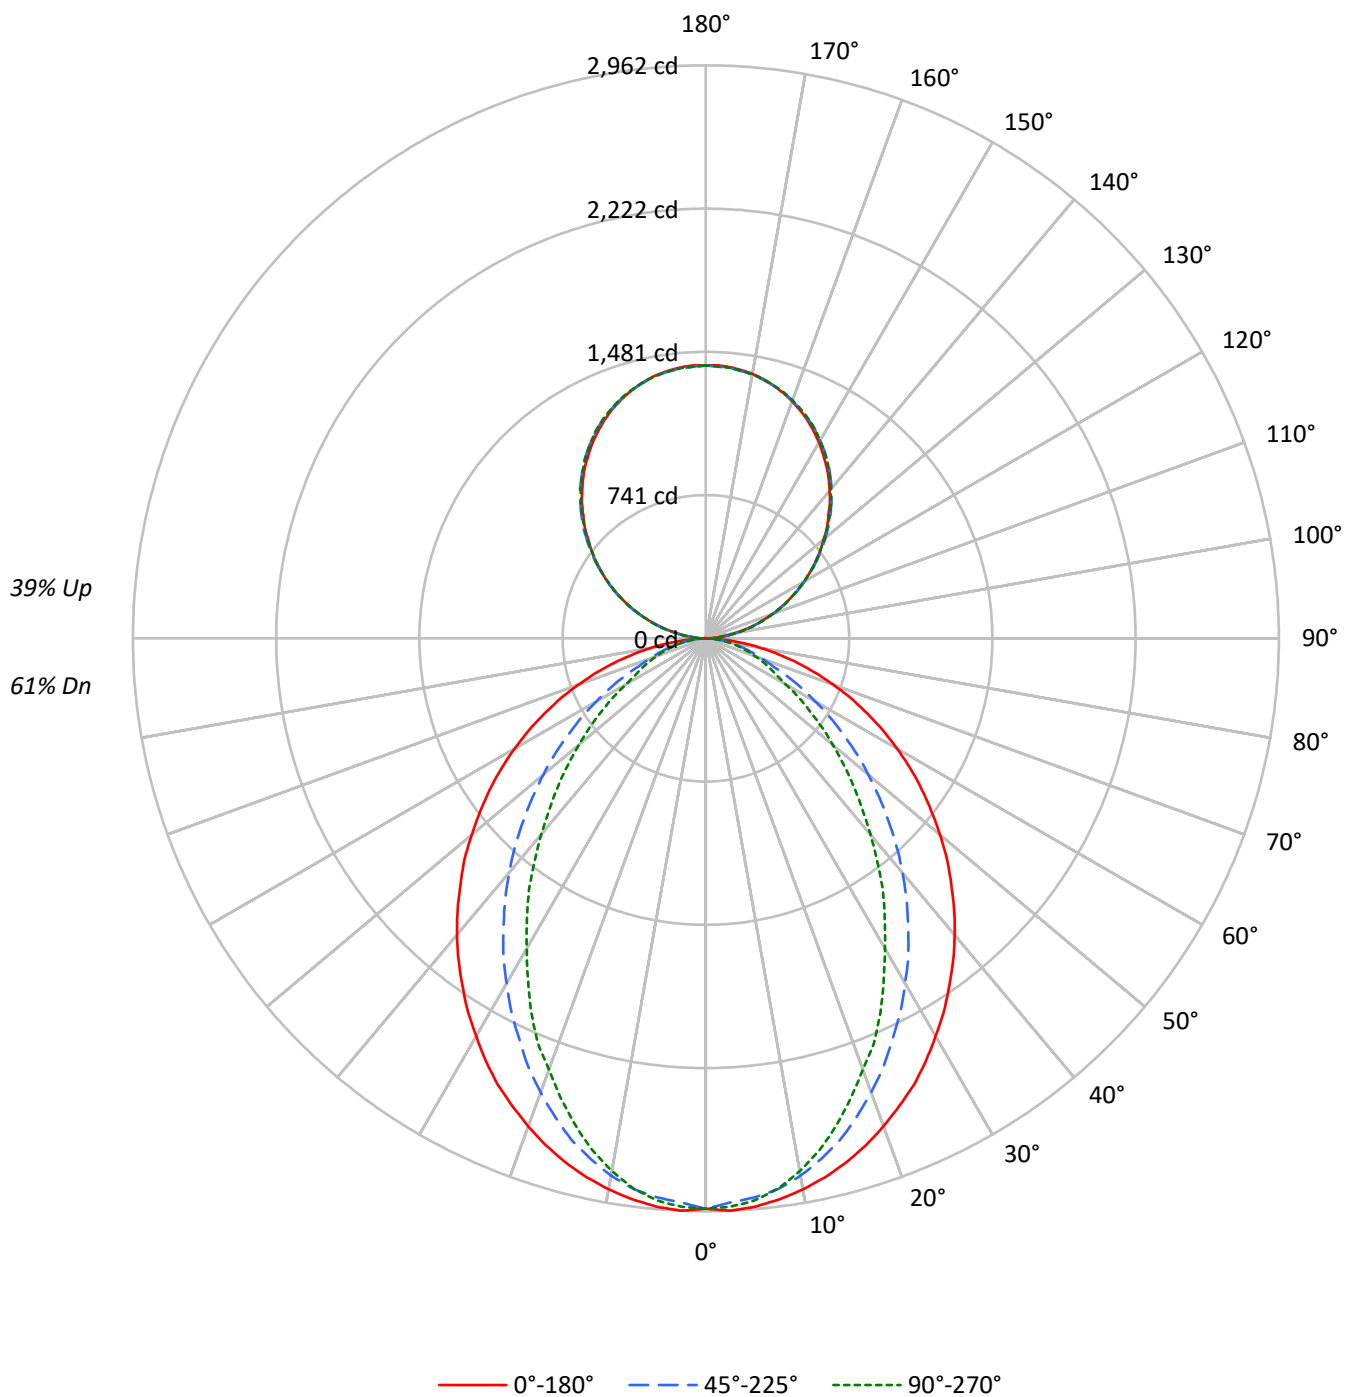

TEST NUMBER: P922194

CATALOG NUMBER: DFN2DIP-PN3F0-080D050US940-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66
1	101	97	93	89	94	91	87	84	79	77	75	69	67	65	59	58	57
2	92	85	79	74	86	80	75	70	70	66	63	61	58	56	53	51	49
3	85	75	68	62	79	71	64	59	62	57	53	55	51	48	47	45	42
4	78	67	59	53	72	63	56	51	56	50	46	49	45	41	43	39	37
5	72	60	52	46	67	57	50	44	50	45	40	44	40	36	39	35	32
6	66	54	46	41	62	51	44	39	46	40	35	40	36	32	35	32	29
7	61	49	41	36	57	47	39	34	42	36	32	37	32	29	32	29	26
8	57	45	37	32	53	43	36	31	38	32	28	34	29	26	30	26	23
9	53	41	34	29	50	39	32	28	35	29	26	31	27	23	28	24	21
10	50	38	31	26	47	36	29	25	32	27	23	29	25	21	26	22	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3447	3447	3447
5°	3450	3389	3412
10°	3414	3321	3300
15°	3365	3208	3127
20°	3301	3055	2915
25°	3235	2883	2710
30°	3147	2707	2452
35°	3061	2519	2224
40°	2974	2324	1964
45°	2872	2107	1728
50°	2767	1889	1498
55°	2657	1657	1276
60°	2529	1414	1049
65°	2382	1167	942
70°	2204	937	851
75°	1980	821	771
80°	1655	681	663
85°	1125	443	490

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2872 cd/sqm

TEST NUMBER: P922194

CATALOG NUMBER: DFN2DIP-PN3F0-080D050US940-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	276.3	2.8
10°-20°	758.6	7.6
20°-30°	1065.0	10.6
30°-40°	1160.9	11.6
40°-50°	1067.0	10.7
50°-60°	838.0	8.4
60°-70°	545.4	5.4
70°-80°	280.8	2.8
80°-90°	75.7	0.8
90°-100°	87.3	0.9
100°-110°	277.2	2.8
110°-120°	474.5	4.7
120°-130°	624.0	6.2
130°-140°	700.4	7.0
140°-150°	686.8	6.9
150°-160°	576.1	5.8
160°-170°	382.1	3.8
170°-180°	133.5	1.3
0°-30°	2099.9	21.0
0°-40°	3260.8	32.6
0°-60°	5165.8	51.6
0°-90°	6067.6	60.6
90°-120°	838.9	8.4
90°-150°	2850.1	28.5
90°-180°	3942.0	39.4
0°-180°	10009.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2948	2948	2948	2948	2948	
5°	2948	2935	2900	2924	2916	280
15°	2804	2775	2684	2634	2607	790
25°	2546	2460	2284	2175	2134	1171
35°	2193	2057	1822	1654	1595	1373
45°	1793	1614	1334	1144	1081	1385
55°	1363	1155	867	707	656	1218
65°	921	704	464	374	365	913
75°	491	304	214	195	192	519
85°	115	59	51	51	51	132
90°	1	15	42	39	40	10
95°	62	74	76	76	74	69
105°	256	259	262	264	264	270
115°	476	483	481	480	476	471
125°	692	703	700	696	695	619
135°	896	909	911	910	907	692
145°	1087	1096	1103	1104	1099	679
155°	1243	1247	1251	1257	1253	572
165°	1353	1351	1351	1360	1354	382
175°	1408	1404	1402	1410	1403	134
180°	1410	1410	1410	1410	1410	

TEST NUMBER: P922194

CATALOG NUMBER: DFN2DIP-PN3F0-080D050US940-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2948.4	2948.4	2948.4	2948.4	2948.4
2.5°	2961.6	2948.4	2918.9	2945.8	2940.4
5°	2948.4	2935.1	2900.2	2924.3	2916.3
7.5°	2924.3	2908.4	2871.0	2881.6	2868.2
10°	2892.3	2873.6	2820.4	2812.2	2796.3
12.5°	2852.4	2828.3	2756.1	2740.2	2710.8
15°	2804.3	2774.8	2684.2	2633.6	2606.9
17.5°	2748.2	2705.4	2593.4	2534.8	2492.0
20°	2684.2	2630.7	2497.4	2430.9	2371.9
22.5°	2614.9	2553.4	2398.6	2308.0	2268.1
25°	2545.5	2460.1	2283.9	2174.7	2134.5
27.5°	2462.8	2371.9	2177.2	2051.8	1990.4
30°	2374.8	2273.1	2059.8	1923.9	1851.6
32.5°	2289.3	2166.5	1947.9	1787.7	1720.9
35°	2193.3	2057.2	1822.5	1654.4	1595.4
37.5°	2099.9	1953.0	1705.0	1520.7	1454.2
40°	2001.2	1841.2	1582.2	1392.8	1323.4
42.5°	1899.8	1729.1	1459.6	1262.0	1195.4
45°	1793.1	1614.2	1334.2	1144.5	1080.6
47.5°	1691.8	1502.4	1214.2	1024.5	965.9
50°	1579.6	1390.3	1096.7	912.4	856.6
52.5°	1470.1	1269.9	984.5	808.5	757.9
55°	1363.3	1155.3	867.1	707.1	656.5
57.5°	1254.1	1040.6	763.2	613.8	571.0
60°	1141.9	928.5	653.6	517.7	475.0
62.5°	1032.7	819.2	560.3	432.3	411.1
65°	920.6	704.3	464.2	373.7	365.4
67.5°	813.9	597.6	373.7	328.1	320.2
70°	701.8	493.7	309.4	282.8	272.1
72.5°	595.0	397.4	258.8	237.6	232.1
75°	490.9	304.1	213.5	194.7	192.3
77.5°	387.0	216.0	168.2	157.4	152.0
80°	290.7	154.9	128.0	117.4	117.4
82.5°	202.7	104.2	88.0	82.7	82.7
85°	114.7	58.6	50.6	50.6	50.6
87.5°	42.7	21.2	21.2	18.7	18.7
90°	1.2	15.3	41.6	39.1	40.4
92.5°	26.4	35.7	37.0	38.3	38.3
95°	62.1	74.0	76.1	76.1	74.0
97.5°	103.3	114.3	119.0	119.0	119.0
100°	150.9	160.7	164.1	164.1	162.8
102.5°	201.1	208.3	212.9	214.3	212.9
105°	255.9	259.3	261.9	263.9	263.9
107.5°	310.3	315.4	315.4	316.3	310.3
110°	363.0	369.9	369.9	369.9	366.4

TEST NUMBER: P922194

CATALOG NUMBER: DFN2DIP-PN3F0-080D050US940-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	420.0	427.2	426.0	422.6	420.0
115°	476.1	483.0	480.8	479.6	476.1
117.5°	531.8	541.2	535.2	531.8	528.4
120°	587.9	597.3	587.9	587.9	584.1
122.5°	638.9	650.9	644.9	641.5	638.9
125°	692.5	703.1	699.7	695.9	694.6
127.5°	744.8	758.0	753.3	748.1	744.8
130°	793.7	809.0	806.8	804.3	799.6
132.5°	848.6	860.4	861.3	855.3	851.9
135°	895.7	908.8	911.4	910.2	906.8
137.5°	948.4	959.0	961.2	960.3	955.2
140°	994.7	1005.4	1011.3	1011.3	1006.7
142.5°	1042.3	1053.0	1056.4	1057.7	1053.0
145°	1087.4	1095.9	1102.7	1104.0	1099.3
147.5°	1127.8	1138.4	1143.5	1145.7	1140.9
150°	1169.5	1176.7	1181.3	1185.2	1181.3
152.5°	1206.5	1213.7	1219.6	1224.3	1219.6
155°	1243.4	1246.8	1250.6	1256.6	1252.8
157.5°	1275.3	1277.8	1280.0	1288.5	1282.5
160°	1303.8	1306.4	1307.6	1314.8	1309.7
162.5°	1330.2	1330.2	1331.4	1339.5	1333.6
165°	1352.7	1351.4	1351.4	1359.9	1354.0
167.5°	1373.1	1369.2	1369.2	1377.8	1371.8
170°	1388.4	1385.0	1383.8	1392.2	1385.0
172.5°	1399.0	1395.6	1394.4	1402.8	1395.6
175°	1407.6	1404.1	1401.6	1410.1	1402.8
177.5°	1412.2	1408.8	1406.2	1413.5	1406.2
180°	1410.1	1410.1	1410.1	1410.1	1410.1

TEST NUMBER: P922194

CATALOG NUMBER: DFN2DIP-PN3F0-080D050US940-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.34	13.27	13.21	14.15	15.27	8.31	9.24	9.18	10.12	11.23
	3H	14.02	14.85	14.90	15.74	16.88	9.50	10.33	10.38	11.22	12.36
	4H	14.63	15.41	15.53	16.31	17.46	9.95	10.73	10.85	11.63	12.78
	6H	15.05	15.77	15.96	16.68	17.84	10.27	10.99	11.18	11.90	13.06
	8H	15.18	15.86	16.09	16.79	17.95	10.36	11.05	11.28	11.97	13.13
	12H	15.24	15.89	16.16	16.81	18.00	10.41	11.06	11.33	11.97	13.16
4H	2H	12.37	13.15	13.27	14.05	15.20	8.91	9.69	9.81	10.59	11.74
	3H	14.20	14.85	15.11	15.78	16.95	10.27	10.91	11.18	11.85	13.01
	4H	14.89	15.48	15.82	16.41	17.60	10.81	11.40	11.73	12.33	13.52
	6H	15.41	15.92	16.34	16.87	18.06	11.23	11.74	12.17	12.69	13.88
	8H	15.58	16.06	16.52	17.00	18.21	11.36	11.83	12.30	12.78	13.98
	12H	15.68	16.11	16.63	17.07	18.28	11.42	11.85	12.38	12.81	14.02
8H	4H	14.87	15.34	15.81	16.29	17.49	11.10	11.57	12.03	12.51	13.72
	6H	15.43	15.82	16.39	16.81	18.01	11.61	12.00	12.57	12.99	14.19
	8H	15.64	15.99	16.62	16.97	18.19	11.80	12.14	12.77	13.12	14.34
	12H	15.78	16.09	16.76	17.06	18.33	11.91	12.22	12.89	13.19	14.46
12H	4H	14.82	15.25	15.78	16.21	17.42	11.10	11.53	12.06	12.49	13.70
	6H	15.41	15.75	16.38	16.73	17.95	11.66	12.00	12.63	12.98	14.20
	8H	15.63	15.93	16.60	16.90	18.17	11.87	12.17	12.84	13.14	14.41

END OF REPORT