

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924802

Luminaire Tested: DFN2DIP-PN3F0-040D030US950-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924802
REPORT IS A COMBINATION OF REPORTS P899514 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-040D030US950-RLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5776.4 lumens
Efficiency: N/A
Efficacy: 99.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 58
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924802

CATALOG NUMBER: DFN2DIP-PN3F0-040D030US950-RLLFLL

Luminous Intensity Polar Plot

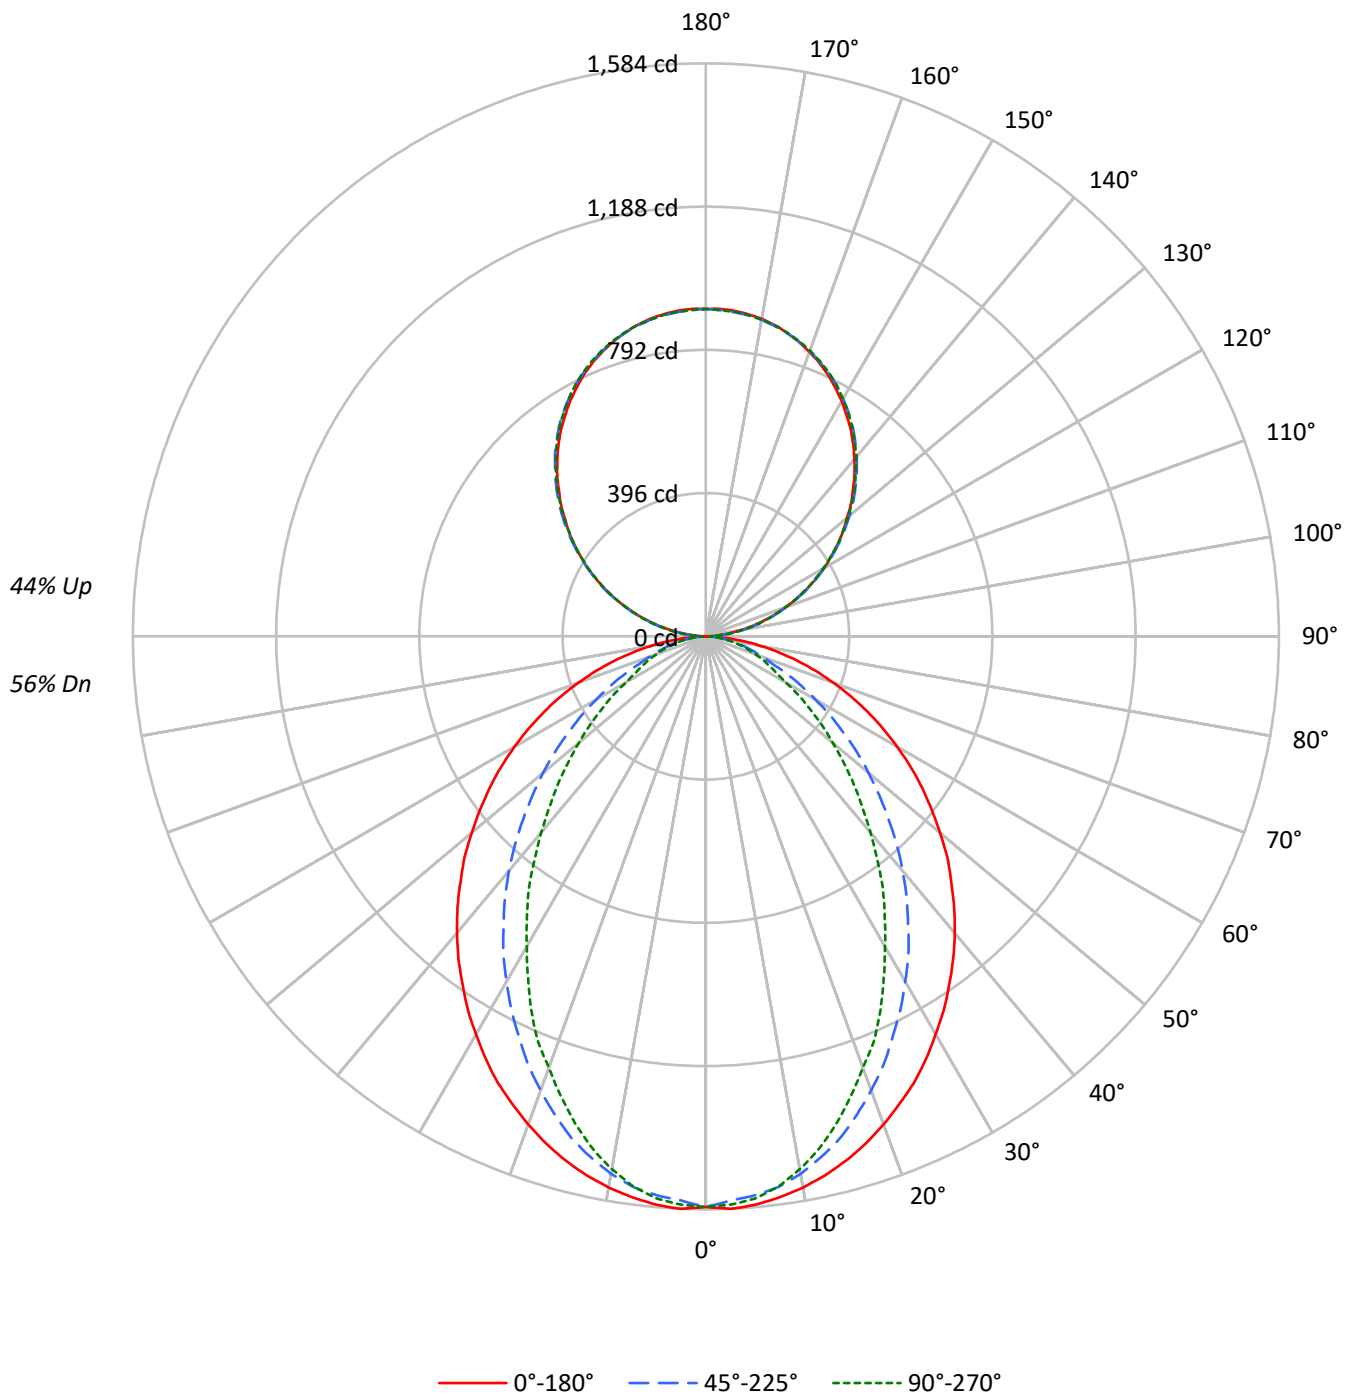

TEST NUMBER: P924802

CATALOG NUMBER: DFN2DIP-PN3F0-040D030US950-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	109	109	109	109		101	101	101	101		87	87	87		74	74	74		62	62	62
1	100	96	92	88		93	89	86	83		77	75	72		66	64	63		55	54	53
2	91	84	78	73		85	79	73	69		68	64	61		58	56	53		49	47	46
3	84	74	67	62		78	70	63	58		61	56	52		52	49	46		44	42	40
4	77	66	59	53		71	62	55	50		54	49	45		47	43	40		40	37	35
5	71	59	51	46		66	56	49	43		49	43	39		42	38	35		36	33	30
6	65	53	46	40		61	50	43	38		44	38	34		38	34	31		33	30	27
7	61	48	41	35		56	46	39	34		40	35	30		35	31	27		30	27	24
8	56	44	37	31		52	42	35	30		37	31	27		32	28	25		28	25	22
9	53	41	33	28		49	38	32	27		34	28	25		30	25	22		26	23	20
10	49	37	30	25		46	35	29	24		31	26	22		28	23	20		24	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1844	1844	1844
5°	1846	1813	1825
10°	1826	1776	1765
15°	1800	1716	1673
20°	1766	1634	1559
25°	1730	1542	1450
30°	1683	1448	1311
35°	1638	1347	1190
40°	1591	1243	1051
45°	1536	1127	924
50°	1480	1011	801
55°	1421	886	683
60°	1353	756	561
65°	1274	624	504
70°	1179	501	455
75°	1059	439	412
80°	885	364	355
85°	601	237	262

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1536 cd/sqm

TEST NUMBER: P924802

CATALOG NUMBER: DFN2DIP-PN3F0-040D030US950-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.8	2.6
10°-20°	405.8	7.0
20°-30°	569.7	9.9
30°-40°	621.0	10.8
40°-50°	570.8	9.9
50°-60°	448.2	7.8
60°-70°	291.8	5.1
70°-80°	150.2	2.6
80°-90°	40.9	0.7
90°-100°	56.0	1.0
100°-110°	178.0	3.1
110°-120°	304.6	5.3
120°-130°	400.5	6.9
130°-140°	449.6	7.8
140°-150°	440.9	7.6
150°-160°	369.8	6.4
160°-170°	245.3	4.2
170°-180°	85.7	1.5
0°-30°	1123.3	19.4
0°-40°	1744.3	30.2
0°-60°	2763.3	47.8
0°-90°	3246.2	56.2
90°-120°	538.5	9.3
90°-150°	1829.5	31.7
90°-180°	2530.0	43.8
0°-180°	5776.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1577	1577	1577	1577	1577	
5°	1577	1570	1551	1564	1560	150
15°	1500	1484	1436	1409	1395	423
25°	1362	1316	1222	1163	1142	626
35°	1173	1100	975	885	853	734
45°	959	864	714	612	578	741
55°	729	618	464	378	351	652
65°	492	377	248	200	196	488
75°	262	163	114	104	103	278
85°	61	31	27	27	27	70
90°	1	10	27	25	26	6
95°	40	48	49	49	48	44
105°	164	166	168	169	169	173
115°	306	310	309	308	306	302
125°	445	451	449	447	446	397
135°	575	583	585	584	582	444
145°	698	704	708	709	706	436
155°	798	800	803	807	804	367
165°	868	868	868	873	869	245
175°	904	901	900	905	900	86
180°	905	905	905	905	905	

TEST NUMBER: P924802

CATALOG NUMBER: DFN2DIP-PN3F0-040D030US950-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1577.2	1577.2	1577.2	1577.2	1577.2
2.5°	1584.3	1577.2	1561.4	1575.8	1572.9
5°	1577.2	1570.0	1551.4	1564.3	1560.1
7.5°	1564.3	1555.8	1535.8	1541.4	1534.3
10°	1547.2	1537.2	1508.7	1504.3	1495.9
12.5°	1525.8	1512.9	1474.3	1465.8	1450.1
15°	1500.1	1484.3	1435.9	1408.8	1394.6
17.5°	1470.1	1447.2	1387.2	1355.9	1333.0
20°	1435.9	1407.2	1335.9	1300.3	1268.8
22.5°	1398.8	1365.9	1283.0	1234.6	1213.3
25°	1361.6	1315.9	1221.7	1163.3	1141.7
27.5°	1317.5	1268.8	1164.6	1097.6	1064.7
30°	1270.3	1216.0	1101.8	1029.1	990.5
32.5°	1224.6	1158.9	1042.0	956.3	920.5
35°	1173.3	1100.4	974.9	884.9	853.4
37.5°	1123.3	1044.7	912.0	813.5	777.9
40°	1070.5	984.9	846.4	745.1	708.0
42.5°	1016.2	924.9	780.8	675.1	639.5
45°	959.2	863.5	713.7	612.3	578.0
47.5°	905.0	803.6	649.5	548.1	516.7
50°	845.0	743.6	586.6	488.1	458.2
52.5°	786.4	679.3	526.7	432.4	405.4
55°	729.3	618.0	463.8	378.3	351.2
57.5°	670.9	556.7	408.2	328.3	305.5
60°	610.8	496.7	349.6	276.9	254.1
62.5°	552.5	438.3	299.7	231.2	219.9
65°	492.5	376.7	248.3	199.9	195.5
67.5°	435.4	319.7	199.9	175.5	171.2
70°	375.4	264.1	165.5	151.3	145.5
72.5°	318.3	212.6	138.4	127.1	124.2
75°	262.5	162.7	114.2	104.2	102.8
77.5°	207.0	115.5	90.0	84.2	81.3
80°	155.5	82.8	68.4	62.9	62.9
82.5°	108.5	55.7	47.1	44.2	44.2
85°	61.3	31.4	27.1	27.1	27.1
87.5°	22.9	11.4	11.4	10.0	10.0
90°	0.9	9.8	26.7	25.1	25.9
92.5°	16.9	22.9	23.8	24.5	24.5
95°	39.9	47.5	48.8	48.8	47.5
97.5°	66.3	73.4	76.4	76.4	76.4
100°	96.8	103.1	105.3	105.3	104.6
102.5°	129.1	133.8	136.7	137.6	136.7
105°	164.3	166.5	168.1	169.4	169.4
107.5°	199.2	202.4	202.4	203.0	199.2
110°	233.1	237.5	237.5	237.5	235.3

TEST NUMBER: P924802

CATALOG NUMBER: DFN2DIP-PN3F0-040D030US950-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	269.6	274.3	273.4	271.2	269.6
115°	305.7	310.0	308.6	307.9	305.7
117.5°	341.3	347.4	343.5	341.3	339.1
120°	377.4	383.4	377.4	377.4	374.9
122.5°	410.1	417.8	413.9	411.7	410.1
125°	444.6	451.3	449.1	446.7	445.9
127.5°	478.0	486.5	483.6	480.2	478.0
130°	509.4	519.3	517.9	516.3	513.3
132.5°	544.6	552.3	552.8	549.0	546.8
135°	575.0	583.4	585.1	584.2	582.0
137.5°	608.7	615.6	617.0	616.5	613.1
140°	638.5	645.4	649.2	649.2	646.1
142.5°	669.1	675.9	678.1	679.0	675.9
145°	698.0	703.5	707.9	708.6	705.7
147.5°	724.0	730.8	734.0	735.4	732.4
150°	750.7	755.4	758.3	760.8	758.3
152.5°	774.5	779.0	782.9	785.9	782.9
155°	798.2	800.3	802.8	806.6	804.2
157.5°	818.6	820.2	821.7	827.1	823.3
160°	836.9	838.6	839.4	844.0	840.8
162.5°	853.8	853.8	854.7	859.8	856.0
165°	868.3	867.5	867.5	872.9	869.1
167.5°	881.4	878.9	878.9	884.4	880.5
170°	891.2	889.0	888.3	893.7	889.0
172.5°	898.0	895.9	895.0	900.5	895.9
175°	903.5	901.3	899.7	905.2	900.5
177.5°	906.5	904.3	902.7	907.3	902.7
180°	905.2	905.2	905.2	905.2	905.2

TEST NUMBER: P924802

CATALOG NUMBER: DFN2DIP-PN3F0-040D030US950-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.79	10.68	10.70	11.60	12.78	5.76	6.64	6.67	7.57	8.75
	3H	11.47	12.26	12.39	13.19	14.40	6.94	7.74	7.87	8.67	9.88
	4H	12.08	12.82	13.01	13.76	14.98	7.39	8.14	8.33	9.08	10.29
	6H	12.49	13.18	13.44	14.13	15.35	7.71	8.40	8.66	9.34	10.57
	8H	12.62	13.27	13.57	14.23	15.46	7.80	8.45	8.76	9.42	10.64
	12H	12.68	13.30	13.64	14.26	15.51	7.84	8.47	8.80	9.42	10.67
4H	2H	9.82	10.56	10.76	11.50	12.72	6.36	7.10	7.30	8.04	9.26
	3H	11.64	12.26	12.59	13.23	14.46	7.71	8.33	8.66	9.29	10.52
	4H	12.33	12.90	13.29	13.86	15.12	8.25	8.82	9.21	9.78	11.03
	6H	12.84	13.33	13.82	14.32	15.57	8.67	9.15	9.64	10.14	11.39
	8H	13.02	13.47	13.99	14.45	15.72	8.79	9.25	9.77	10.23	11.50
	12H	13.11	13.52	14.11	14.52	15.79	8.86	9.27	9.85	10.26	11.54
8H	4H	12.30	12.76	13.28	13.74	15.01	8.53	8.98	9.51	9.96	11.23
	6H	12.86	13.24	13.86	14.26	15.53	9.04	9.42	10.04	10.44	11.71
	8H	13.08	13.41	14.09	14.42	15.70	9.23	9.56	10.24	10.57	11.86
	12H	13.21	13.50	14.22	14.51	15.84	9.35	9.64	10.36	10.64	11.97
12H	4H	12.26	12.67	13.25	13.66	14.94	8.54	8.95	9.53	9.94	11.22
	6H	12.84	13.17	13.85	14.18	15.46	9.09	9.42	10.10	10.43	11.72
	8H	13.06	13.35	14.07	14.35	15.68	9.30	9.59	10.31	10.59	11.92

END OF REPORT