

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924925

Luminaire Tested: DFN2DIP-PN3F0-080D060US950-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924925
REPORT IS A COMBINATION OF REPORTS P901083 AND P897955
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-080D060US950-FLONL
Description: 3 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 13222.4 lumens
Efficiency: N/A
Efficacy: 105.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 125.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924925
CATALOG NUMBER: DFN2DIP-PN3F0-080D060US950-FLLONL

Luminous Intensity Polar Plot

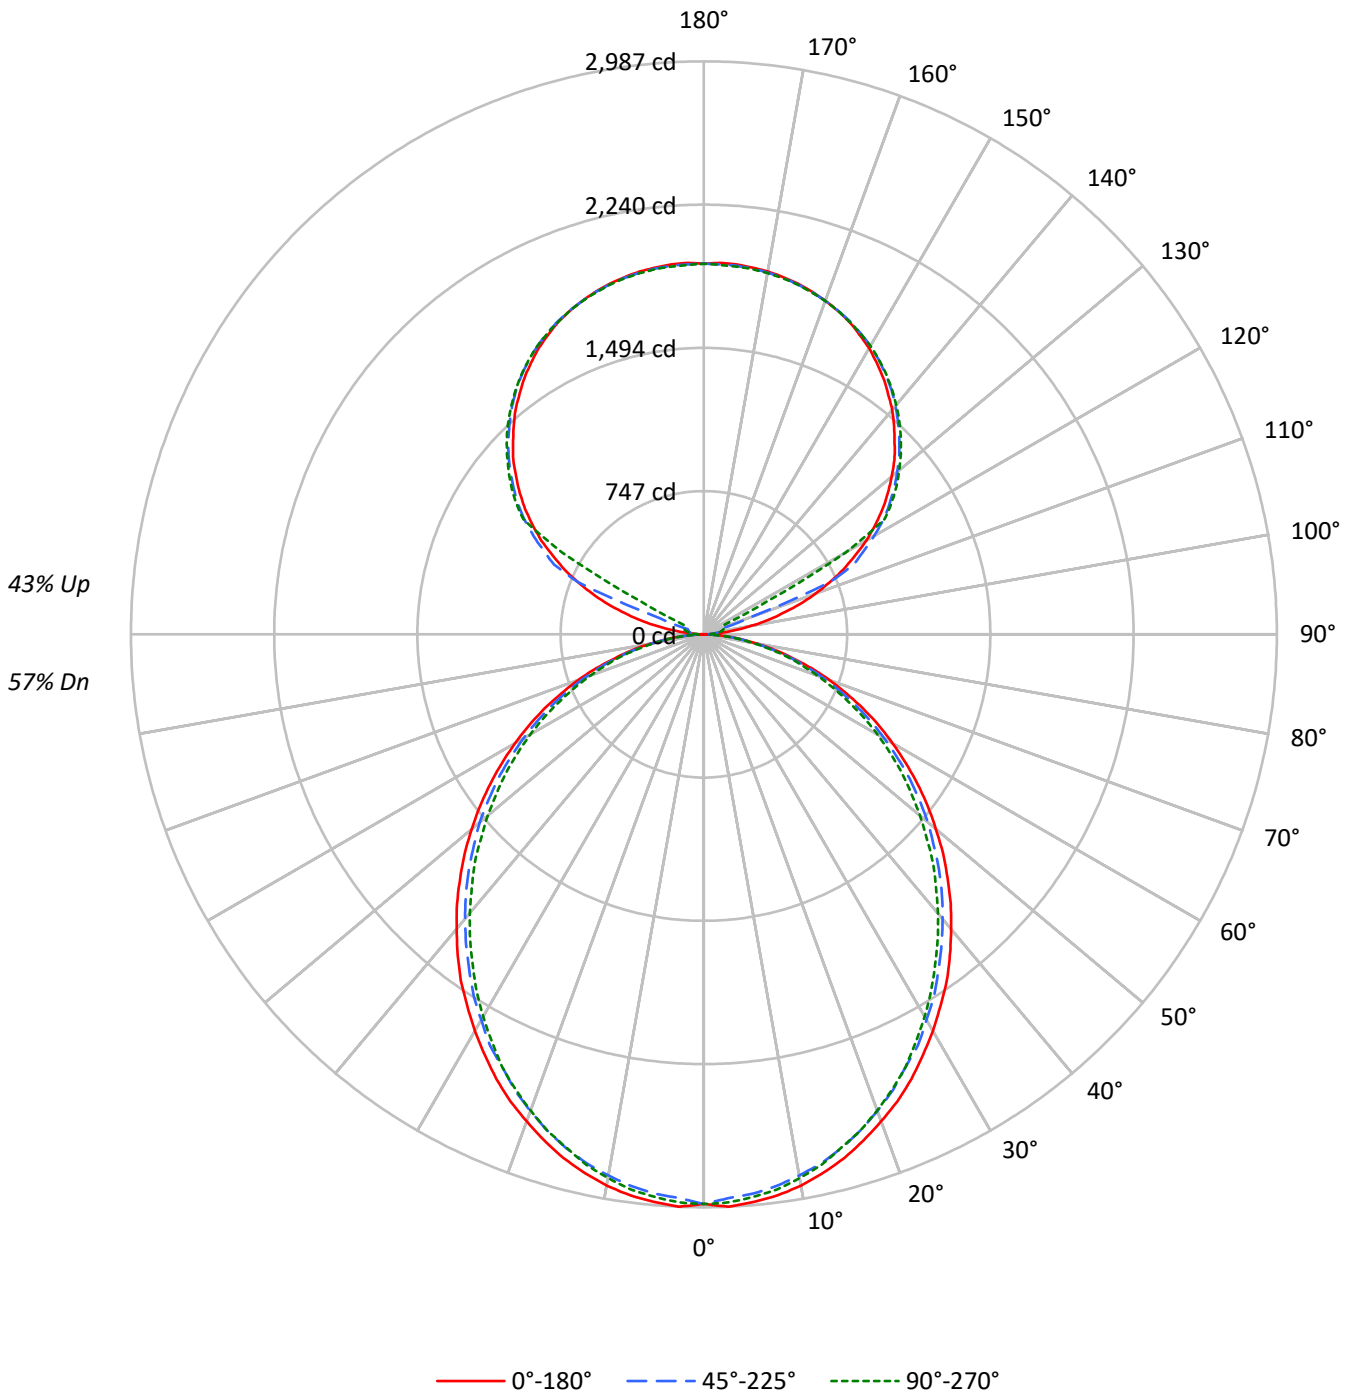



TEST NUMBER: P924925
 CATALOG NUMBER: DFN2DIP-PN3F0-080D060US950-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	63	63	63	57	57	57	57
1	99	95	91	88	92	89	85	82	77	74	72	66	64	62	55	54	53	48	48	48	48
2	91	83	77	72	84	77	72	67	67	63	59	58	55	52	49	47	45	40	40	40	40
3	83	73	66	60	77	68	62	56	59	54	50	51	47	44	43	40	38	34	34	34	34
4	76	65	57	50	70	61	53	48	53	47	43	45	41	38	39	35	33	29	29	29	29
5	69	58	49	43	64	54	47	41	47	41	37	41	36	33	35	31	29	26	26	26	26
6	64	52	44	38	59	49	41	36	43	37	32	37	32	29	32	28	25	22	22	22	22
7	59	47	39	33	55	44	37	31	39	33	28	34	29	25	29	25	22	20	20	20	20
8	55	43	35	29	51	40	33	28	35	29	25	31	26	23	27	23	20	18	18	18	18
9	51	39	31	26	48	37	30	25	32	27	23	28	24	20	25	21	18	16	16	16	16
10	48	36	28	24	45	34	27	22	30	24	20	26	22	18	23	19	17	15	15	15	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3471	3471	3471
5°	3475	3421	3445
10°	3445	3372	3397
15°	3392	3314	3322
20°	3322	3235	3246
25°	3251	3140	3159
30°	3164	3052	3047
35°	3081	2948	2930
40°	2979	2843	2818
45°	2877	2738	2704
50°	2766	2627	2571
55°	2649	2499	2449
60°	2517	2348	2309
65°	2372	2190	2143
70°	2188	1998	1965
75°	1934	1768	1798
80°	1627	1474	1483
85°	1148	976	968

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2877 cd/sqm



TEST NUMBER: P924925

CATALOG NUMBER: DFN2DIP-PN3F0-080D060US950-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	279.5	2.1
10°-20°	786.4	5.9
20°-30°	1155.7	8.7
30°-40°	1342.3	10.2
40°-50°	1340.6	10.1
50°-60°	1169.0	8.8
60°-70°	864.1	6.5
70°-80°	488.9	3.7
80°-90°	132.4	1.0
90°-100°	63.7	0.5
100°-110°	237.5	1.8
110°-120°	629.8	4.8
120°-130°	1044.5	7.9
130°-140°	1109.5	8.4
140°-150°	1031.2	7.8
150°-160°	829.1	6.3
160°-170°	534.2	4.0
170°-180°	183.9	1.4
0°-30°	2221.6	16.8
0°-40°	3563.9	27.0
0°-60°	6073.6	45.9
0°-90°	7559.1	57.2
90°-120°	930.9	7.0
90°-150°	4116.2	31.1
90°-180°	5663.0	42.8
0°-180°	13222.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2970	2970	2970	2970	2970	
5°	2970	2958	2927	2950	2944	282
15°	2827	2810	2773	2784	2770	796
25°	2558	2536	2487	2493	2487	1177
35°	2207	2179	2133	2116	2102	1378
45°	1796	1776	1733	1702	1691	1386
55°	1359	1342	1308	1274	1259	1215
65°	917	900	871	845	831	906
75°	480	474	460	443	448	512
85°	117	114	112	103	100	130
90°	1	17	28	35	38	12
95°	91	45	54	62	60	108
105°	425	467	85	101	106	454
115°	804	828	862	215	115	791
125°	1136	1155	1181	1191	1195	1014
135°	1406	1429	1441	1455	1452	1086
145°	1631	1630	1654	1663	1656	1020
155°	1796	1784	1800	1809	1798	828
165°	1893	1884	1888	1898	1888	535
175°	1936	1926	1929	1939	1925	184
180°	1932	1932	1932	1932	1932	



TEST NUMBER: P924925

CATALOG NUMBER: DFN2DIP-PN3F0-080D060US950-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2969.6	2969.6	2969.6	2969.6	2969.6
2.5°	2986.9	2972.7	2941.2	2969.6	2964.2
5°	2969.6	2958.4	2927.0	2949.7	2944.2
7.5°	2949.7	2932.7	2901.2	2924.2	2918.5
10°	2918.5	2898.4	2864.2	2886.9	2878.5
12.5°	2875.5	2858.5	2824.2	2838.4	2832.7
15°	2827.0	2810.0	2772.7	2784.2	2770.0
17.5°	2767.0	2750.0	2712.7	2727.0	2712.7
20°	2701.3	2684.3	2644.3	2652.8	2641.5
22.5°	2635.8	2610.0	2572.7	2572.7	2567.0
25°	2558.5	2535.8	2487.4	2492.8	2487.4
27.5°	2472.8	2452.8	2415.8	2407.3	2393.1
30°	2387.4	2364.3	2321.7	2313.2	2301.6
32.5°	2295.9	2278.9	2233.1	2215.9	2204.4
35°	2207.4	2178.9	2133.1	2115.9	2101.7
37.5°	2107.4	2081.6	2035.9	2015.9	2001.7
40°	2004.7	1981.6	1936.0	1910.5	1898.9
42.5°	1904.8	1881.7	1836.3	1807.4	1790.6
45°	1796.3	1776.3	1733.2	1702.0	1690.6
47.5°	1690.6	1670.5	1624.8	1593.3	1576.3
50°	1579.1	1564.8	1524.8	1484.8	1470.6
52.5°	1470.6	1450.6	1413.6	1382.2	1362.1
55°	1359.4	1342.1	1307.9	1273.7	1259.4
57.5°	1247.9	1233.7	1196.4	1162.2	1150.6
60°	1136.4	1125.2	1085.2	1053.7	1045.2
62.5°	1027.9	1008.0	979.5	951.0	939.5
65°	916.8	899.5	871.0	845.2	831.0
67.5°	802.5	788.0	762.5	742.6	731.1
70°	696.8	685.3	659.6	639.6	628.3
72.5°	588.3	576.9	562.6	542.6	534.1
75°	479.6	474.1	459.6	442.7	448.4
77.5°	382.6	371.1	365.4	356.9	348.4
80°	285.7	282.7	276.9	268.5	262.6
82.5°	194.2	194.2	191.5	179.9	179.9
85°	117.0	114.2	111.5	102.7	100.0
87.5°	51.5	45.8	40.0	31.5	28.5
90°	1.3	16.8	27.9	35.0	37.7
92.5°	35.0	29.4	33.5	36.3	37.7
95°	90.8	44.6	54.5	61.6	60.1
97.5°	163.5	48.9	71.2	75.6	76.9
100°	247.5	55.9	79.7	90.8	93.6
102.5°	339.6	337.0	82.5	97.8	102.1
105°	424.9	466.9	85.3	100.6	106.3
107.5°	524.2	559.0	88.1	103.4	109.0
110°	619.3	648.5	244.7	104.9	110.4



TEST NUMBER: P924925

CATALOG NUMBER: DFN2DIP-PN3F0-080D060US950-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	708.7	733.8	710.1	107.5	111.9
115°	803.7	827.5	862.5	215.3	114.7
117.5°	886.2	914.1	938.0	738.0	371.8
120°	978.5	999.4	1024.7	1041.4	852.7
122.5°	1056.7	1079.1	1107.1	1115.4	1116.9
125°	1136.4	1154.6	1181.1	1191.0	1195.1
127.5°	1209.1	1228.7	1249.7	1263.7	1265.0
130°	1277.6	1300.0	1315.3	1330.7	1329.4
132.5°	1347.5	1365.7	1381.0	1393.6	1392.3
135°	1406.3	1428.7	1441.1	1455.2	1452.4
137.5°	1467.6	1484.4	1498.5	1512.5	1508.4
140°	1527.7	1539.1	1554.4	1566.9	1560.0
142.5°	1578.2	1588.0	1606.2	1617.2	1610.3
145°	1631.3	1629.8	1653.6	1663.4	1656.4
147.5°	1677.3	1673.1	1696.9	1703.8	1698.4
150°	1722.2	1712.3	1734.8	1743.1	1736.1
152.5°	1759.8	1748.7	1769.6	1778.1	1768.2
155°	1796.2	1783.7	1800.5	1808.8	1797.6
157.5°	1825.6	1814.4	1827.0	1836.8	1825.6
160°	1850.8	1842.3	1850.8	1859.1	1849.3
162.5°	1873.0	1864.7	1871.7	1881.5	1868.9
165°	1892.6	1884.3	1888.4	1898.3	1888.4
167.5°	1908.0	1899.6	1903.9	1913.7	1901.0
170°	1920.7	1912.2	1915.1	1924.8	1912.2
172.5°	1929.0	1920.7	1923.5	1933.3	1920.7
175°	1936.0	1926.1	1929.0	1938.7	1924.8
177.5°	1938.7	1929.0	1930.4	1940.2	1927.7
180°	1931.8	1931.8	1931.8	1931.8	1931.8



TEST NUMBER: P924925
 CATALOG NUMBER: DFN2DIP-PN3F0-080D060US950-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.19	13.12	13.09	14.04	15.20	11.76	12.68	12.65	13.60	14.76
	3H	13.85	14.69	14.76	15.61	16.80	13.37	14.21	14.28	15.13	16.32
	4H	14.44	15.23	15.36	16.16	17.36	13.96	14.74	14.88	15.67	16.87
	6H	14.84	15.57	15.77	16.50	17.71	14.35	15.08	15.28	16.01	17.22
	8H	14.94	15.64	15.88	16.59	17.80	14.45	15.15	15.39	16.10	17.31
	12H	14.99	15.65	15.94	16.60	17.83	14.49	15.15	15.44	16.10	17.34
4H	2H	12.66	13.45	13.59	14.38	15.58	12.31	13.10	13.23	14.03	15.23
	3H	14.52	15.18	15.46	16.14	17.36	14.12	14.78	15.06	15.74	16.95
	4H	15.24	15.84	16.18	16.79	18.03	14.82	15.42	15.77	16.38	17.61
	6H	15.75	16.27	16.71	17.25	18.48	15.33	15.85	16.29	16.82	18.06
	8H	15.90	16.38	16.86	17.35	18.61	15.47	15.96	16.43	16.93	18.18
	12H	15.97	16.41	16.95	17.40	18.66	15.53	15.97	16.52	16.96	18.22
8H	4H	15.44	15.92	16.40	16.89	18.14	15.07	15.55	16.03	16.52	17.77
	6H	16.06	16.46	17.05	17.48	18.73	15.69	16.09	16.67	17.10	18.35
	8H	16.28	16.63	17.28	17.63	18.90	15.90	16.25	16.89	17.25	18.52
	12H	16.41	16.72	17.41	17.72	19.03	16.01	16.32	17.01	17.32	18.63
12H	4H	15.42	15.86	16.40	16.85	18.11	15.06	15.50	16.04	16.49	17.74
	6H	16.09	16.45	17.09	17.45	18.72	15.73	16.08	16.72	17.08	18.35
	8H	16.33	16.64	17.33	17.64	18.95	15.96	16.27	16.96	17.27	18.58