

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924933

Luminaire Tested: DFN2DIP-PN3F0-080D080US950-FLLONL

Issue Date: 11/21/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P924933  
REPORT IS A COMBINATION OF REPORTS P901111 AND P897955  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-PN3F0-080D080US950-FLLONL  
Description: 3 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 15111.4 lumens  
Efficiency: N/A  
Efficacy: 106.9 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')  
CIE Type: General Diffuse

Input Watts (W): 141.3  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9967  
Total Harmonic Distortion (THDi): 0.063  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P924933

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US950-FLLONL

### Luminous Intensity Polar Plot

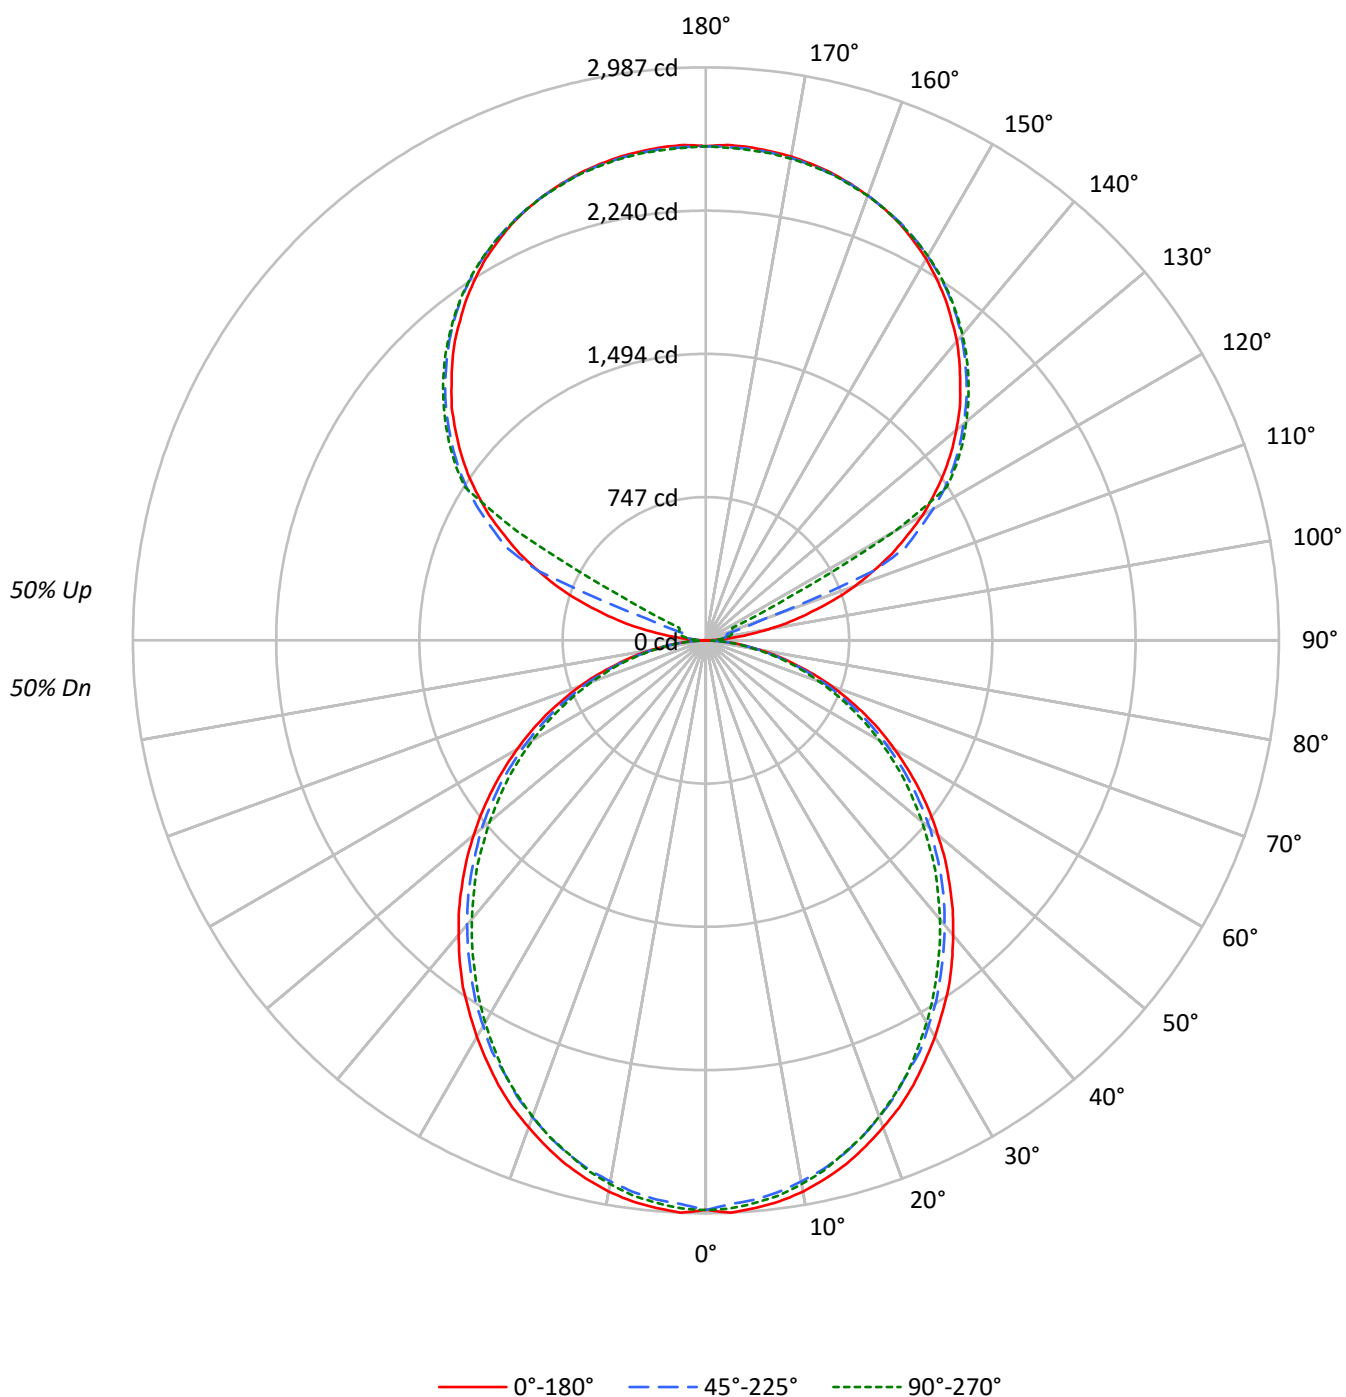

TEST NUMBER: P924933

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US950-FLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| RF  | 20  |     |     |     | 20 |    |    |    | 20 |    |    |    | 20 |    |    |    | 20 |
| RC  | 80  |     |     |     | 70 |    |    |    | 50 |    |    |    | 30 |    |    |    | 10 |
| RW  | 70  | 50  | 30  | 10  | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 |
| RCR |     |     |     |     |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 0   | 107 | 107 | 107 | 107 | 99 | 99 | 99 | 99 | 83 | 83 | 83 | 69 | 69 | 69 | 56 | 56 | 56 |
| 1   | 98  | 93  | 90  | 86  | 90 | 86 | 83 | 80 | 73 | 71 | 68 | 61 | 59 | 58 | 50 | 48 | 47 |
| 2   | 89  | 82  | 75  | 70  | 82 | 76 | 70 | 66 | 64 | 60 | 57 | 53 | 51 | 48 | 44 | 42 | 40 |
| 3   | 81  | 72  | 64  | 59  | 75 | 66 | 60 | 55 | 56 | 52 | 48 | 47 | 44 | 41 | 39 | 36 | 34 |
| 4   | 74  | 64  | 56  | 50  | 68 | 59 | 52 | 47 | 50 | 45 | 41 | 42 | 38 | 35 | 35 | 32 | 29 |
| 5   | 68  | 57  | 48  | 42  | 63 | 53 | 45 | 40 | 45 | 39 | 35 | 38 | 34 | 30 | 31 | 28 | 26 |
| 6   | 63  | 51  | 43  | 37  | 58 | 47 | 40 | 35 | 40 | 35 | 31 | 34 | 30 | 27 | 28 | 25 | 23 |
| 7   | 58  | 46  | 38  | 32  | 53 | 43 | 36 | 30 | 37 | 31 | 27 | 31 | 27 | 23 | 26 | 23 | 20 |
| 8   | 54  | 42  | 34  | 29  | 50 | 39 | 32 | 27 | 33 | 28 | 24 | 28 | 24 | 21 | 24 | 20 | 18 |
| 9   | 50  | 38  | 30  | 25  | 46 | 35 | 29 | 24 | 31 | 25 | 21 | 26 | 22 | 19 | 22 | 19 | 16 |
| 10  | 47  | 35  | 28  | 23  | 43 | 33 | 26 | 22 | 28 | 23 | 19 | 24 | 20 | 17 | 20 | 17 | 15 |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°   | 45°  | 90°  |
|-----|------|------|------|
| 0°  | 3471 | 3471 | 3471 |
| 5°  | 3475 | 3421 | 3445 |
| 10° | 3445 | 3372 | 3397 |
| 15° | 3392 | 3314 | 3322 |
| 20° | 3322 | 3235 | 3246 |
| 25° | 3251 | 3140 | 3159 |
| 30° | 3164 | 3052 | 3047 |
| 35° | 3081 | 2948 | 2930 |
| 40° | 2979 | 2843 | 2818 |
| 45° | 2877 | 2738 | 2704 |
| 50° | 2766 | 2627 | 2571 |
| 55° | 2649 | 2499 | 2449 |
| 60° | 2517 | 2348 | 2309 |
| 65° | 2372 | 2190 | 2143 |
| 70° | 2188 | 1998 | 1965 |
| 75° | 1934 | 1768 | 1798 |
| 80° | 1627 | 1474 | 1483 |
| 85° | 1148 | 976  | 968  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2877 cd/sqm

TEST NUMBER: P924933

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US950-FLLONL

**ZONAL LUMENS:**

| Zone      | Lumens  | % Fixture |
|-----------|---------|-----------|
| 0°-10°    | 279.5   | 1.8       |
| 10°-20°   | 786.4   | 5.2       |
| 20°-30°   | 1155.7  | 7.6       |
| 30°-40°   | 1342.3  | 8.9       |
| 40°-50°   | 1340.6  | 8.9       |
| 50°-60°   | 1169.0  | 7.7       |
| 60°-70°   | 864.1   | 5.7       |
| 70°-80°   | 488.9   | 3.2       |
| 80°-90°   | 133.6   | 0.9       |
| 90°-100°  | 84.9    | 0.6       |
| 100°-110° | 316.6   | 2.1       |
| 110°-120° | 839.7   | 5.6       |
| 120°-130° | 1392.7  | 9.2       |
| 130°-140° | 1479.4  | 9.8       |
| 140°-150° | 1374.9  | 9.1       |
| 150°-160° | 1105.4  | 7.3       |
| 160°-170° | 712.3   | 4.7       |
| 170°-180° | 245.2   | 1.6       |
| 0°-30°    | 2221.6  | 14.7      |
| 0°-40°    | 3563.9  | 23.6      |
| 0°-60°    | 6073.6  | 40.2      |
| 0°-90°    | 7560.2  | 50.0      |
| 90°-120°  | 1241.3  | 8.2       |
| 90°-150°  | 5488.3  | 36.3      |
| 90°-180°  | 7551.0  | 50.0      |
| 0°-180°   | 15111.4 | 100.0     |

**CANDELA DISTRIBUTION:**

|      | 0°   | 22.5° | 45°  | 67.5° | 90°  | Flux |
|------|------|-------|------|-------|------|------|
| 0°   | 2970 | 2970  | 2970 | 2970  | 2970 |      |
| 5°   | 2970 | 2958  | 2927 | 2950  | 2944 | 282  |
| 15°  | 2827 | 2810  | 2773 | 2784  | 2770 | 796  |
| 25°  | 2558 | 2536  | 2487 | 2493  | 2487 | 1177 |
| 35°  | 2207 | 2179  | 2133 | 2116  | 2102 | 1378 |
| 45°  | 1796 | 1776  | 1733 | 1702  | 1691 | 1386 |
| 55°  | 1359 | 1342  | 1308 | 1274  | 1259 | 1215 |
| 65°  | 917  | 900   | 871  | 845   | 831  | 906  |
| 75°  | 480  | 474   | 460  | 443   | 448  | 512  |
| 85°  | 117  | 114   | 112  | 103   | 100  | 130  |
| 90°  | 2    | 22    | 37   | 47    | 50   | 14   |
| 95°  | 121  | 60    | 73   | 82    | 80   | 143  |
| 105° | 567  | 623   | 114  | 134   | 142  | 605  |
| 115° | 1072 | 1103  | 1150 | 287   | 153  | 1055 |
| 125° | 1515 | 1540  | 1575 | 1588  | 1594 | 1351 |
| 135° | 1875 | 1905  | 1922 | 1940  | 1936 | 1448 |
| 145° | 2175 | 2173  | 2205 | 2218  | 2208 | 1360 |
| 155° | 2395 | 2378  | 2401 | 2412  | 2397 | 1104 |
| 165° | 2524 | 2512  | 2518 | 2531  | 2518 | 713  |
| 175° | 2581 | 2568  | 2572 | 2585  | 2566 | 246  |
| 180° | 2576 | 2576  | 2576 | 2576  | 2576 |      |

TEST NUMBER: P924933

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US950-FLLONL

**CANDELA DISTRIBUTION (FULL):**

|        | 0°     | 22.5°  | 45°    | 67.5°  | 90°    |
|--------|--------|--------|--------|--------|--------|
| 0°     | 2969.6 | 2969.6 | 2969.6 | 2969.6 | 2969.6 |
| 2.5°   | 2986.9 | 2972.7 | 2941.2 | 2969.6 | 2964.2 |
| 5°     | 2969.6 | 2958.4 | 2927.0 | 2949.7 | 2944.2 |
| 7.5°   | 2949.7 | 2932.7 | 2901.2 | 2924.2 | 2918.5 |
| 10°    | 2918.5 | 2898.4 | 2864.2 | 2886.9 | 2878.5 |
| 12.5°  | 2875.5 | 2858.5 | 2824.2 | 2838.4 | 2832.7 |
| 15°    | 2827.0 | 2810.0 | 2772.7 | 2784.2 | 2770.0 |
| 17.5°  | 2767.0 | 2750.0 | 2712.7 | 2727.0 | 2712.7 |
| 20°    | 2701.3 | 2684.3 | 2644.3 | 2652.8 | 2641.5 |
| 22.5°  | 2635.8 | 2610.0 | 2572.7 | 2572.7 | 2567.0 |
| 25°    | 2558.5 | 2535.8 | 2487.4 | 2492.8 | 2487.4 |
| 27.5°  | 2472.8 | 2452.8 | 2415.8 | 2407.3 | 2393.1 |
| 30°    | 2387.4 | 2364.3 | 2321.7 | 2313.2 | 2301.6 |
| 32.5°  | 2295.9 | 2278.9 | 2233.1 | 2215.9 | 2204.4 |
| 35°    | 2207.4 | 2178.9 | 2133.1 | 2115.9 | 2101.7 |
| 37.5°  | 2107.4 | 2081.6 | 2035.9 | 2015.9 | 2001.7 |
| 40°    | 2004.7 | 1981.6 | 1936.0 | 1910.5 | 1898.9 |
| 42.5°  | 1904.8 | 1881.7 | 1836.3 | 1807.4 | 1790.6 |
| 45°    | 1796.3 | 1776.3 | 1733.2 | 1702.0 | 1690.6 |
| 47.5°  | 1690.6 | 1670.5 | 1624.8 | 1593.3 | 1576.3 |
| 50°    | 1579.1 | 1564.8 | 1524.8 | 1484.8 | 1470.6 |
| 52.5°  | 1470.6 | 1450.6 | 1413.6 | 1382.2 | 1362.1 |
| 55°    | 1359.4 | 1342.1 | 1307.9 | 1273.7 | 1259.4 |
| 57.5°  | 1247.9 | 1233.7 | 1196.4 | 1162.2 | 1150.6 |
| 60°    | 1136.4 | 1125.2 | 1085.2 | 1053.7 | 1045.2 |
| 62.5°  | 1027.9 | 1008.0 | 979.5  | 951.0  | 939.5  |
| 65°    | 916.8  | 899.5  | 871.0  | 845.2  | 831.0  |
| 67.5°  | 802.5  | 788.0  | 762.5  | 742.6  | 731.1  |
| 70°    | 696.8  | 685.3  | 659.6  | 639.6  | 628.3  |
| 72.5°  | 588.3  | 576.9  | 562.6  | 542.6  | 534.1  |
| 75°    | 479.6  | 474.1  | 459.6  | 442.7  | 448.4  |
| 77.5°  | 382.6  | 371.1  | 365.4  | 356.9  | 348.4  |
| 80°    | 285.7  | 282.7  | 276.9  | 268.5  | 262.6  |
| 82.5°  | 194.2  | 194.2  | 191.5  | 179.9  | 179.9  |
| 85°    | 117.0  | 114.2  | 111.5  | 102.7  | 100.0  |
| 87.5°  | 51.5   | 45.8   | 40.0   | 31.5   | 28.5   |
| 90°    | 1.8    | 22.3   | 37.2   | 46.7   | 50.3   |
| 92.5°  | 46.7   | 39.2   | 44.7   | 48.5   | 50.3   |
| 95°    | 121.1  | 59.5   | 72.6   | 82.1   | 80.1   |
| 97.5°  | 218.0  | 65.3   | 94.9   | 100.7  | 102.5  |
| 100°   | 330.0  | 74.6   | 106.3  | 121.1  | 124.8  |
| 102.5° | 452.9  | 449.2  | 110.0  | 130.3  | 136.1  |
| 105°   | 566.6  | 622.6  | 113.7  | 134.1  | 141.7  |
| 107.5° | 698.9  | 745.4  | 117.5  | 137.9  | 145.4  |
| 110°   | 825.8  | 864.7  | 326.3  | 139.9  | 147.2  |

TEST NUMBER: P924933

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US950-FLLONL

**CANDELA DISTRIBUTION (continued):**

|        | 0°     | 22.5°  | 45°    | 67.5°  | 90°    |
|--------|--------|--------|--------|--------|--------|
| 112.5° | 945.0  | 978.4  | 946.8  | 143.4  | 149.2  |
| 115°   | 1071.6 | 1103.3 | 1150.0 | 287.1  | 152.9  |
| 117.5° | 1181.6 | 1218.8 | 1250.7 | 984.0  | 495.8  |
| 120°   | 1304.7 | 1332.5 | 1366.2 | 1388.5 | 1136.9 |
| 122.5° | 1408.9 | 1438.8 | 1476.2 | 1487.3 | 1489.3 |
| 125°   | 1515.1 | 1539.5 | 1574.9 | 1587.9 | 1593.5 |
| 127.5° | 1612.1 | 1638.2 | 1666.4 | 1684.9 | 1686.7 |
| 130°   | 1703.5 | 1733.3 | 1753.7 | 1774.3 | 1772.5 |
| 132.5° | 1796.7 | 1821.0 | 1841.4 | 1858.2 | 1856.4 |
| 135°   | 1875.0 | 1904.9 | 1921.5 | 1940.3 | 1936.5 |
| 137.5° | 1956.9 | 1979.3 | 1998.1 | 2016.7 | 2011.1 |
| 140°   | 2037.0 | 2052.1 | 2072.5 | 2089.3 | 2079.9 |
| 142.5° | 2104.3 | 2117.3 | 2141.4 | 2156.3 | 2147.0 |
| 145°   | 2175.1 | 2173.1 | 2204.8 | 2217.9 | 2208.5 |
| 147.5° | 2236.5 | 2230.9 | 2262.5 | 2271.9 | 2264.5 |
| 150°   | 2296.2 | 2283.1 | 2313.0 | 2324.0 | 2314.8 |
| 152.5° | 2346.5 | 2331.6 | 2359.4 | 2370.8 | 2357.7 |
| 155°   | 2394.9 | 2378.3 | 2400.6 | 2411.7 | 2396.9 |
| 157.5° | 2434.0 | 2419.2 | 2436.0 | 2449.1 | 2434.0 |
| 160°   | 2467.7 | 2456.5 | 2467.7 | 2478.8 | 2465.7 |
| 162.5° | 2497.4 | 2486.3 | 2495.6 | 2508.6 | 2491.8 |
| 165°   | 2523.5 | 2512.5 | 2518.0 | 2531.0 | 2518.0 |
| 167.5° | 2544.0 | 2532.8 | 2538.5 | 2551.6 | 2534.8 |
| 170°   | 2560.9 | 2549.6 | 2553.4 | 2566.5 | 2549.6 |
| 172.5° | 2572.0 | 2560.9 | 2564.6 | 2577.7 | 2560.9 |
| 175°   | 2581.2 | 2568.2 | 2572.0 | 2585.0 | 2566.5 |
| 177.5° | 2585.0 | 2572.0 | 2573.9 | 2587.0 | 2570.2 |
| 180°   | 2575.7 | 2575.7 | 2575.7 | 2575.7 | 2575.7 |

TEST NUMBER: P924933

CATALOG NUMBER: DFN2DIP-PN3F0-080D080US950-FLONL

**CIE UGR TABLE:**

| Reflectances:   |      |                  |       |       |       |       |                |       |       |       |       |
|-----------------|------|------------------|-------|-------|-------|-------|----------------|-------|-------|-------|-------|
| Ceiling         |      | 0.7              | 0.7   | 0.5   | 0.5   | 0.3   | 0.7            | 0.7   | 0.5   | 0.5   | 0.3   |
| Wall            |      | 0.5              | 0.3   | 0.5   | 0.3   | 0.3   | 0.5            | 0.3   | 0.5   | 0.3   | 0.3   |
| Reference plane |      | 0.2              | 0.2   | 0.2   | 0.2   | 0.2   | 0.2            | 0.2   | 0.2   | 0.2   | 0.2   |
| Room dimensions |      | Viewed crosswise |       |       |       |       | Viewed endwise |       |       |       |       |
| X=2H            | Y=2H | 11.56            | 12.42 | 12.52 | 13.39 | 14.66 | 11.12          | 11.98 | 12.08 | 12.95 | 14.23 |
|                 | 3H   | 13.21            | 13.99 | 14.18 | 14.97 | 16.26 | 12.73          | 13.50 | 13.70 | 14.49 | 15.78 |
|                 | 4H   | 13.80            | 14.53 | 14.78 | 15.51 | 16.82 | 13.31          | 14.04 | 14.29 | 15.03 | 16.33 |
|                 | 6H   | 14.19            | 14.87 | 15.19 | 15.86 | 17.17 | 13.70          | 14.38 | 14.70 | 15.37 | 16.68 |
|                 | 8H   | 14.30            | 14.94 | 15.29 | 15.94 | 17.26 | 13.81          | 14.45 | 14.80 | 15.45 | 16.77 |
|                 | 12H  | 14.34            | 14.95 | 15.35 | 15.95 | 17.29 | 13.84          | 14.46 | 14.85 | 15.46 | 16.79 |
| 4H              | 2H   | 12.02            | 12.75 | 13.01 | 13.73 | 15.04 | 11.67          | 12.40 | 12.65 | 13.38 | 14.69 |
|                 | 3H   | 13.88            | 14.49 | 14.87 | 15.50 | 16.82 | 13.48          | 14.09 | 14.47 | 15.10 | 16.42 |
|                 | 4H   | 14.59            | 15.14 | 15.59 | 16.15 | 17.49 | 14.17          | 14.73 | 15.18 | 15.74 | 17.07 |
|                 | 6H   | 15.10            | 15.58 | 16.11 | 16.61 | 17.94 | 14.67          | 15.15 | 15.69 | 16.18 | 17.52 |
|                 | 8H   | 15.24            | 15.69 | 16.26 | 16.72 | 18.07 | 14.82          | 15.26 | 15.83 | 16.29 | 17.64 |
|                 | 12H  | 15.31            | 15.72 | 16.35 | 16.76 | 18.11 | 14.87          | 15.28 | 15.91 | 16.32 | 17.68 |
| 8H              | 4H   | 14.78            | 15.23 | 15.80 | 16.25 | 17.60 | 14.41          | 14.86 | 15.43 | 15.88 | 17.23 |
|                 | 6H   | 15.40            | 15.77 | 16.44 | 16.84 | 18.19 | 15.03          | 15.40 | 16.07 | 16.46 | 17.81 |
|                 | 8H   | 15.62            | 15.95 | 16.67 | 17.00 | 18.36 | 15.24          | 15.56 | 16.29 | 16.61 | 17.98 |
|                 | 12H  | 15.75            | 16.03 | 16.80 | 17.08 | 18.49 | 15.35          | 15.63 | 16.40 | 16.68 | 18.09 |
| 12H             | 4H   | 14.76            | 15.17 | 15.80 | 16.21 | 17.56 | 14.40          | 14.81 | 15.44 | 15.85 | 17.20 |
|                 | 6H   | 15.43            | 15.76 | 16.48 | 16.81 | 18.18 | 15.07          | 15.39 | 16.12 | 16.45 | 17.81 |
|                 | 8H   | 15.67            | 15.96 | 16.72 | 17.00 | 18.41 | 15.30          | 15.58 | 16.35 | 16.63 | 18.04 |