

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903156

Luminaire Tested: DFN2DIP-PN4F0-040D070US830-FLLFLL

Issue Date: 11/21/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P903156  
REPORT IS A COMBINATION OF REPORTS P899663 AND P896497  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-PN4F0-040D070US830-FLLFLL  
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9571.5 lumens  
Efficiency: N/A  
Efficacy: 111.4 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')  
CIE Type: Semi-Indirect

Input Watts (W): 85.9  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9968  
Total Harmonic Distortion (THDi): 0.064  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P903156  
CATALOG NUMBER: DFN2DIP-PN4F0-040D070US830-FLLFLL

### Luminous Intensity Polar Plot

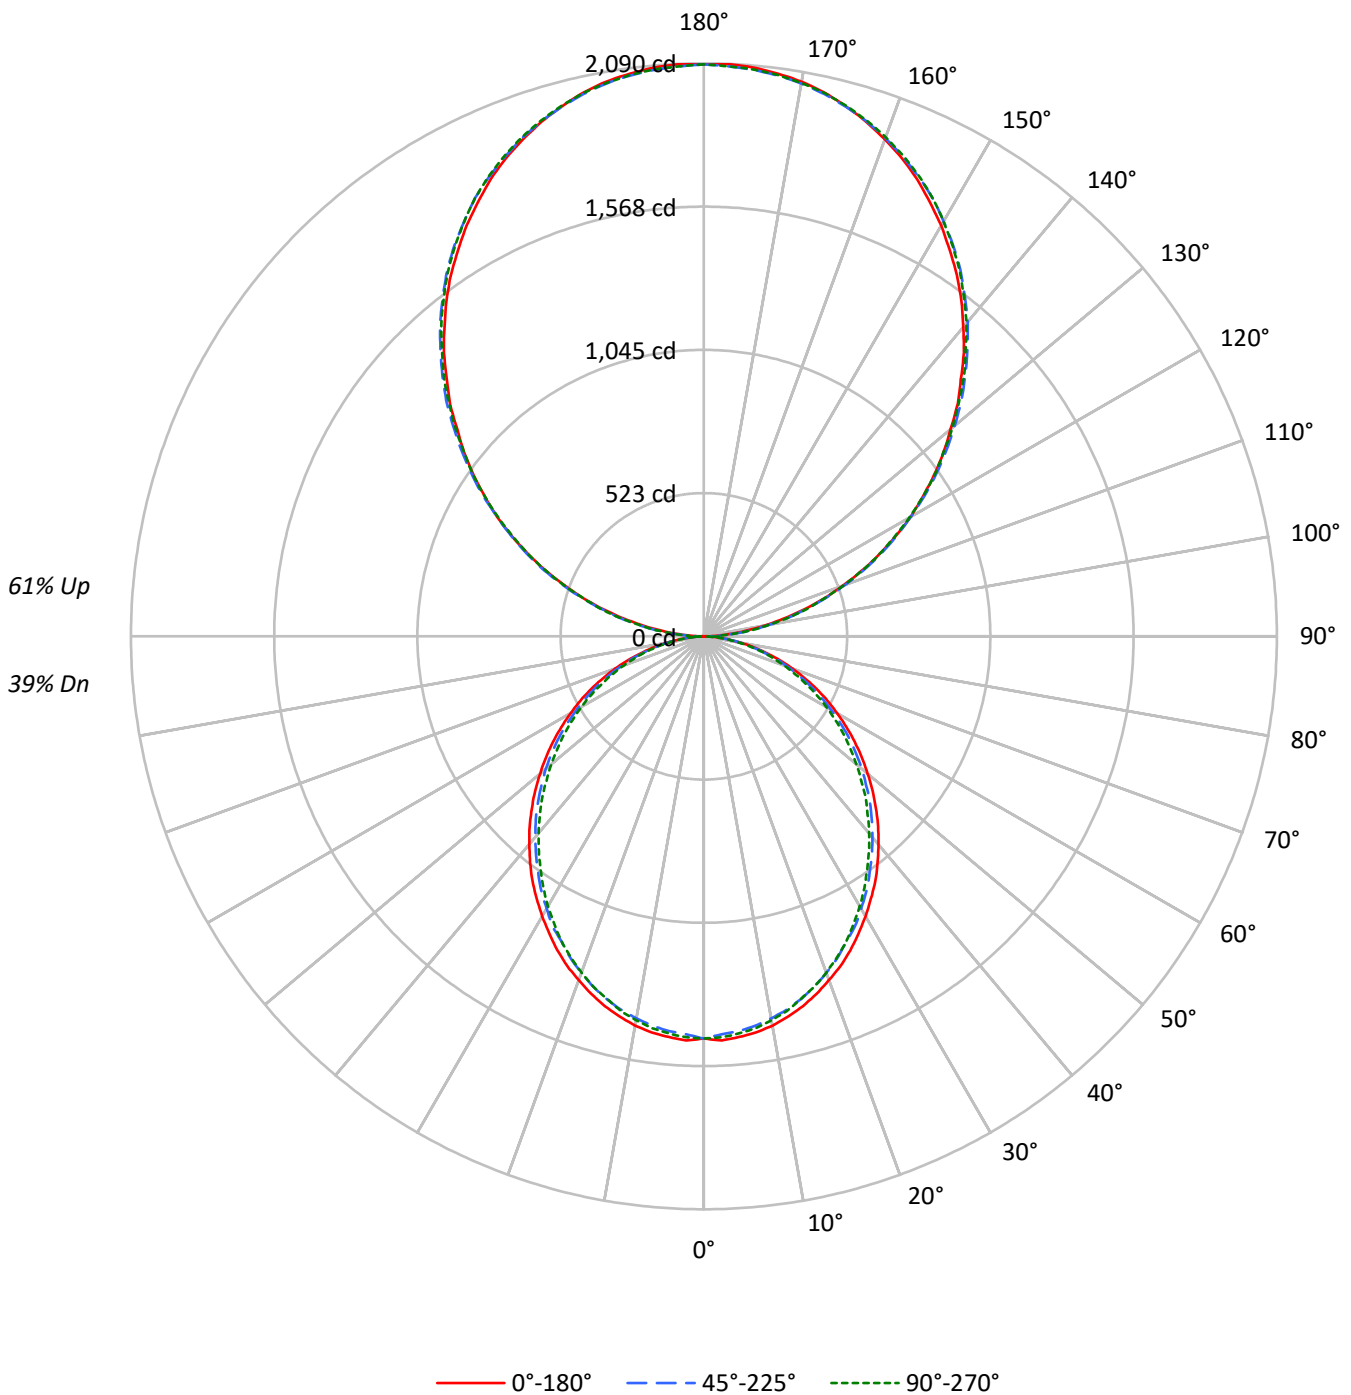



TEST NUMBER: P903156

CATALOG NUMBER: DFN2DIP-PN4F0-040D070US830-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46	39				39
1	95	91	87	84	86	83	80	77	68	65	63	54	52	51	41	40	39	33				33
2	87	79	73	68	79	72	67	63	59	56	52	47	45	42	36	34	33	28				28
3	79	70	63	57	72	64	58	53	52	48	44	42	38	36	32	30	28	23				23
4	72	62	54	48	65	56	50	44	46	41	37	37	33	31	28	26	24	20				20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	26	23	21	17				17
6	61	49	41	36	55	45	38	33	37	32	28	30	26	23	23	20	18	15				15
7	56	44	37	31	51	41	34	29	34	28	25	27	23	20	21	18	16	14				14
8	52	40	33	27	47	37	30	26	31	26	22	25	21	18	19	17	15	12				12
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11				11
10	45	34	26	22	41	31	25	20	26	21	18	21	17	15	17	14	12	10				10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1071	1071	1071
5°	1073	1056	1063
10°	1064	1042	1049
15°	1048	1025	1027
20°	1027	1001	1004
25°	1006	973	977
30°	980	947	944
35°	955	915	908
40°	924	884	874
45°	893	852	840
50°	860	819	799
55°	825	781	763
60°	785	736	720
65°	742	689	671
70°	687	631	617
75°	611	563	568
80°	518	476	474
85°	375	324	317

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 1635 cd/sqm



TEST NUMBER: P903156

CATALOG NUMBER: DFN2DIP-PN4F0-040D070US830-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	138.1	1.4
10°-20°	388.5	4.1
20°-30°	570.9	6.0
30°-40°	663.1	6.9
40°-50°	662.3	6.9
50°-60°	577.5	6.0
60°-70°	426.9	4.5
70°-80°	241.5	2.5
80°-90°	69.7	0.7
90°-100°	129.1	1.3
100°-110°	410.3	4.3
110°-120°	702.1	7.3
120°-130°	923.3	9.6
130°-140°	1036.4	10.8
140°-150°	1016.3	10.6
150°-160°	852.6	8.9
160°-170°	565.4	5.9
170°-180°	197.6	2.1
0°-30°	1097.5	11.5
0°-40°	1760.6	18.4
0°-60°	3000.3	31.3
0°-90°	3738.4	39.1
90°-120°	1241.5	13.0
90°-150°	4217.6	44.1
90°-180°	5833.0	60.9
0°-180°	9571.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1467	1467	1467	1467	1467	
5°	1467	1461	1446	1457	1454	139
15°	1396	1388	1370	1375	1368	393
25°	1264	1253	1229	1231	1229	582
35°	1090	1076	1054	1045	1038	681
45°	887	878	856	841	835	685
55°	672	663	646	629	622	600
65°	453	444	430	418	411	448
75°	237	234	227	219	222	253
85°	58	56	55	51	49	64
90°	2	23	62	58	60	9
95°	92	109	113	113	109	102
105°	379	384	388	391	391	400
115°	705	715	712	710	705	697
125°	1025	1040	1036	1030	1028	916
135°	1326	1345	1349	1347	1342	1025
145°	1609	1622	1632	1634	1627	1005
155°	1840	1845	1851	1860	1854	847
165°	2002	2000	2000	2012	2004	565
175°	2083	2078	2074	2087	2076	198
180°	2087	2087	2087	2087	2087	



TEST NUMBER: P903156

CATALOG NUMBER: DFN2DIP-PN4F0-040D070US830-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1467.0	1467.0	1467.0	1467.0	1467.0
2.5°	1475.5	1468.5	1452.9	1467.0	1464.3
5°	1467.0	1461.4	1445.9	1457.1	1454.4
7.5°	1457.1	1448.7	1433.1	1444.5	1441.7
10°	1441.7	1431.8	1414.9	1426.2	1421.9
12.5°	1420.4	1412.0	1395.2	1402.2	1399.3
15°	1396.5	1388.1	1369.7	1375.4	1368.4
17.5°	1366.9	1358.5	1340.1	1347.1	1340.1
20°	1334.4	1326.0	1306.3	1310.4	1304.9
22.5°	1302.0	1289.3	1270.9	1270.9	1268.1
25°	1263.9	1252.6	1228.7	1231.4	1228.7
27.5°	1221.5	1211.6	1193.4	1189.2	1182.2
30°	1179.3	1168.0	1146.9	1142.6	1137.0
32.5°	1134.2	1125.8	1103.2	1094.7	1088.9
35°	1090.4	1076.4	1053.8	1045.3	1038.2
37.5°	1041.0	1028.3	1005.7	995.9	988.8
40°	990.3	978.9	956.3	943.8	938.1
42.5°	940.9	929.5	907.1	892.9	884.5
45°	887.3	877.5	856.2	840.8	835.1
47.5°	835.1	825.2	802.7	787.1	778.7
50°	780.0	773.0	753.3	733.5	726.4
52.5°	726.4	716.6	698.3	682.8	672.9
55°	671.6	663.0	646.1	629.1	622.2
57.5°	616.4	609.4	591.0	574.1	568.4
60°	561.4	555.8	536.1	520.6	516.3
62.5°	507.8	497.9	483.9	469.8	464.1
65°	452.9	444.3	430.3	417.5	410.6
67.5°	396.4	389.3	376.7	366.8	361.2
70°	344.2	338.6	325.8	315.9	310.4
72.5°	290.7	284.9	278.0	268.1	263.8
75°	237.0	234.2	227.1	218.7	221.5
77.5°	189.0	183.3	180.5	176.3	172.1
80°	141.1	139.6	136.8	132.6	129.8
82.5°	96.0	96.0	94.6	88.9	88.9
85°	57.8	56.5	55.0	50.7	49.4
87.5°	25.4	22.6	19.8	15.6	14.0
90°	1.9	22.6	61.6	57.9	59.8
92.5°	39.0	52.9	54.8	56.6	56.6
95°	91.8	109.4	112.6	112.6	109.4
97.5°	152.9	169.2	176.2	176.2	176.2
100°	223.3	237.8	242.8	242.8	240.9
102.5°	297.6	308.2	315.2	317.1	315.2
105°	378.7	383.7	387.5	390.7	390.7
107.5°	459.2	466.7	466.7	468.1	459.2
110°	537.2	547.3	547.3	547.3	542.2



TEST NUMBER: P903156

CATALOG NUMBER: DFN2DIP-PN4F0-040D070US830-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	621.5	632.3	630.4	625.3	621.5
115°	704.6	714.6	711.5	709.6	704.6
117.5°	786.9	800.8	792.0	786.9	781.9
120°	870.0	883.8	870.0	870.0	864.3
122.5°	945.5	963.1	954.3	949.2	945.5
125°	1024.7	1040.5	1035.5	1029.8	1027.9
127.5°	1102.1	1121.6	1114.7	1107.2	1102.1
130°	1174.5	1197.1	1194.0	1190.2	1183.3
132.5°	1255.7	1273.3	1274.5	1265.7	1260.7
135°	1325.5	1344.9	1348.8	1346.8	1341.8
137.5°	1403.4	1419.2	1422.3	1421.1	1413.5
140°	1472.1	1487.8	1496.6	1496.6	1489.7
142.5°	1542.5	1558.2	1563.2	1565.1	1558.2
145°	1609.2	1621.7	1631.8	1633.7	1626.8
147.5°	1669.0	1684.7	1692.2	1695.4	1688.5
150°	1730.6	1741.3	1748.2	1753.9	1748.2
152.5°	1785.3	1796.0	1804.8	1811.8	1804.8
155°	1840.0	1845.0	1850.8	1859.5	1853.9
157.5°	1887.3	1891.0	1894.1	1906.8	1897.9
160°	1929.4	1933.2	1935.0	1945.7	1938.1
162.5°	1968.4	1968.4	1970.3	1982.2	1973.4
165°	2001.7	1999.8	1999.8	2012.4	2003.6
167.5°	2031.9	2026.3	2026.3	2038.8	2030.0
170°	2054.6	2049.6	2047.7	2060.2	2049.6
172.5°	2070.3	2065.2	2063.3	2075.9	2065.2
175°	2082.8	2077.8	2074.1	2086.6	2075.9
177.5°	2089.8	2084.7	2080.9	2091.7	2080.9
180°	2086.6	2086.6	2086.6	2086.6	2086.6



TEST NUMBER: P903156  
 CATALOG NUMBER: DFN2DIP-PN4F0-040D070US830-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.41	7.18	7.45	8.23	9.65	5.97	6.74	7.02	7.79	9.21
	3H	8.07	8.76	9.12	9.82	11.25	7.58	8.27	8.64	9.33	10.77
	4H	8.65	9.31	9.72	10.37	11.81	8.16	8.82	9.23	9.88	11.33
	6H	9.05	9.65	10.13	10.72	12.17	8.56	9.16	9.63	10.23	11.68
	8H	9.15	9.73	10.23	10.81	12.26	8.66	9.23	9.74	10.32	11.77
	12H	9.20	9.74	10.28	10.82	12.29	8.70	9.24	9.78	10.32	11.79
4H	2H	6.86	7.52	7.93	8.58	10.02	6.51	7.16	7.58	8.23	9.67
	3H	8.72	9.27	9.80	10.36	11.81	8.32	8.87	9.40	9.95	11.41
	4H	9.43	9.94	10.52	11.02	12.49	9.02	9.52	10.10	10.60	12.08
	6H	9.95	10.38	11.04	11.48	12.95	9.52	9.95	10.62	11.06	12.53
	8H	10.10	10.50	11.19	11.59	13.08	9.67	10.07	10.76	11.16	12.65
	12H	10.17	10.53	11.28	11.64	13.13	9.73	10.09	10.84	11.20	12.69
8H	4H	9.62	10.03	10.72	11.12	12.61	9.25	9.65	10.35	10.75	12.24
	6H	10.25	10.59	11.37	11.72	13.21	9.88	10.21	11.00	11.35	12.83
	8H	10.48	10.77	11.60	11.89	13.39	10.09	10.38	11.22	11.50	13.01
	12H	10.61	10.86	11.73	11.98	13.52	10.20	10.46	11.33	11.57	13.12
12H	4H	9.60	9.97	10.72	11.08	12.57	9.24	9.61	10.36	10.71	12.21
	6H	10.28	10.57	11.41	11.69	13.20	9.92	10.21	11.04	11.33	12.83
	8H	10.52	10.78	11.65	11.89	13.44	10.15	10.41	11.28	11.52	13.06