

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903170

Luminaire Tested: DFN2DIP-PN4F0-040D100US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903170
REPORT IS A COMBINATION OF REPORTS P899718 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-040D100US830-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11546.1 lumens
Efficiency: N/A
Efficacy: 106.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 108.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903170

CATALOG NUMBER: DFN2DIP-PN4F0-040D100US830-RLLFLL

Luminous Intensity Polar Plot

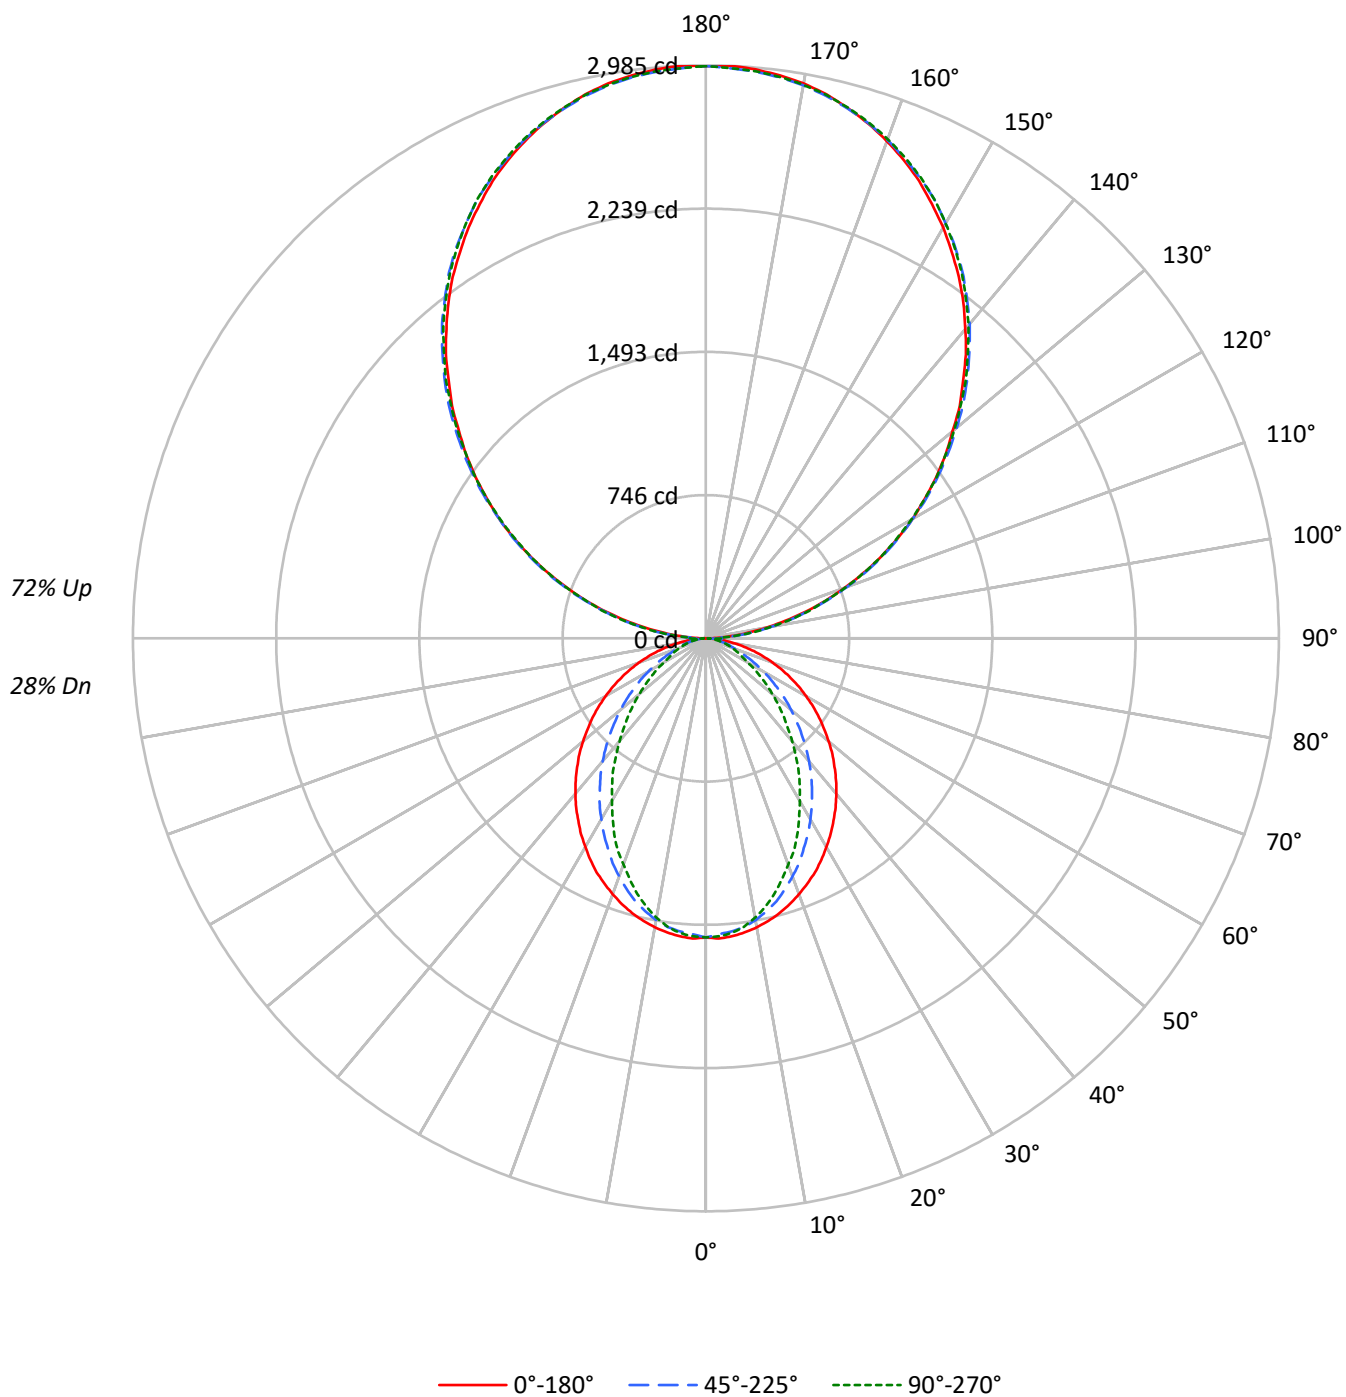

TEST NUMBER: P903170

CATALOG NUMBER: DFN2DIP-PN4F0-040D100US830-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36
1	93	89	85	82	83	80	77	74	62	60	59	47	45	44	32	31	31
2	85	78	72	67	76	70	65	61	55	52	49	41	39	37	28	27	26
3	78	69	62	56	69	62	56	51	49	45	41	37	34	32	25	24	23
4	71	61	53	48	63	55	48	44	43	39	35	33	30	27	23	21	20
5	65	54	47	41	58	49	42	37	39	34	31	29	26	24	21	19	17
6	60	49	41	35	54	44	37	32	35	30	27	27	23	21	19	17	15
7	55	44	36	31	50	40	33	28	32	27	23	24	21	19	17	15	14
8	51	40	32	27	46	36	30	25	29	24	21	22	19	16	16	14	12
9	48	36	29	24	43	33	27	22	26	22	19	20	17	15	15	13	11
10	45	33	26	22	40	30	24	20	24	20	17	19	16	13	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1137	1137	1137
5°	1139	1120	1127
10°	1128	1098	1090
15°	1112	1062	1034
20°	1092	1012	964
25°	1071	956	897
30°	1043	898	812
35°	1015	837	738
40°	987	773	652
45°	954	702	574
50°	920	631	498
55°	885	554	425
60°	844	474	350
65°	797	393	315
70°	740	317	286
75°	668	280	261
80°	564	235	227
85°	393	158	172

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2335 cd/sqm

TEST NUMBER: P903170

CATALOG NUMBER: DFN2DIP-PN4F0-040D100US830-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.0	1.3
10°-20°	400.9	3.5
20°-30°	562.8	4.9
30°-40°	613.5	5.3
40°-50°	563.9	4.9
50°-60°	442.9	3.8
60°-70°	288.3	2.5
70°-80°	148.4	1.3
80°-90°	46.3	0.4
90°-100°	184.5	1.6
100°-110°	586.1	5.1
110°-120°	1003.0	8.7
120°-130°	1319.1	11.4
130°-140°	1480.6	12.8
140°-150°	1451.9	12.6
150°-160°	1217.9	10.5
160°-170°	807.7	7.0
170°-180°	282.3	2.4
0°-30°	1109.8	9.6
0°-40°	1723.3	14.9
0°-60°	2730.1	23.6
0°-90°	3213.1	27.8
90°-120°	1773.5	15.4
90°-150°	6025.1	52.2
90°-180°	8333.0	72.2
0°-180°	11546.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1558	1558	1558	1558	1558	
5°	1558	1551	1533	1546	1541	148
15°	1482	1466	1419	1392	1378	418
25°	1345	1300	1207	1149	1128	619
35°	1159	1087	963	874	843	726
45°	948	853	705	605	571	732
55°	721	611	458	374	347	644
65°	486	372	245	198	193	482
75°	259	161	113	103	102	274
85°	61	31	27	27	27	70
90°	3	32	88	83	85	11
95°	131	156	161	161	156	146
105°	541	548	554	558	558	571
115°	1006	1021	1016	1014	1006	996
125°	1464	1486	1479	1471	1468	1308
135°	1894	1921	1927	1924	1917	1464
145°	2299	2317	2331	2334	2324	1436
155°	2629	2636	2644	2656	2648	1210
165°	2860	2857	2857	2875	2862	807
175°	2976	2968	2963	2981	2966	283
180°	2981	2981	2981	2981	2981	

TEST NUMBER: P903170

CATALOG NUMBER: DFN2DIP-PN4F0-040D100US830-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1558.2	1558.2	1558.2	1558.2	1558.2
2.5°	1565.3	1558.2	1542.7	1556.9	1554.0
5°	1558.2	1551.1	1532.8	1545.5	1541.3
7.5°	1545.5	1537.1	1517.4	1522.9	1515.9
10°	1528.6	1518.7	1490.5	1486.2	1477.9
12.5°	1507.5	1494.8	1456.6	1448.2	1432.7
15°	1482.1	1466.5	1418.6	1391.9	1377.8
17.5°	1452.5	1429.8	1370.6	1339.6	1317.0
20°	1418.6	1390.3	1319.8	1284.7	1253.6
22.5°	1382.0	1349.5	1267.6	1219.7	1198.7
25°	1345.3	1300.1	1207.0	1149.3	1128.0
27.5°	1301.7	1253.6	1150.7	1084.4	1051.9
30°	1255.1	1201.4	1088.5	1016.7	978.6
32.5°	1209.9	1145.0	1029.4	944.8	909.5
35°	1159.2	1087.2	963.2	874.3	843.2
37.5°	1109.8	1032.2	901.1	803.7	768.5
40°	1057.6	973.1	836.2	736.1	699.5
42.5°	1004.0	913.8	771.4	666.9	631.8
45°	947.6	853.1	705.1	604.9	571.1
47.5°	894.1	794.0	641.7	541.5	510.5
50°	834.8	734.7	579.6	482.2	452.7
52.5°	776.9	671.2	520.4	427.3	400.5
55°	720.6	610.6	458.3	373.7	346.9
57.5°	662.8	550.0	403.3	324.3	301.8
60°	603.5	490.7	345.4	273.6	251.1
62.5°	545.8	433.0	296.1	228.5	217.3
65°	486.5	372.2	245.3	197.5	193.1
67.5°	430.2	315.8	197.5	173.4	169.2
70°	370.9	260.9	163.5	149.5	143.7
72.5°	314.5	210.1	136.8	125.5	122.7
75°	259.4	160.7	112.8	102.9	101.6
77.5°	204.5	114.1	88.9	83.2	80.3
80°	153.6	81.8	67.6	62.1	62.1
82.5°	107.2	55.0	46.6	43.6	43.6
85°	60.6	31.0	26.8	26.8	26.8
87.5°	22.6	11.2	11.2	9.9	9.9
90°	2.7	32.3	88.0	82.7	85.4
92.5°	55.7	75.5	78.2	80.9	80.9
95°	131.2	156.4	160.9	160.9	156.4
97.5°	218.4	241.8	251.7	251.7	251.7
100°	319.1	339.7	346.9	346.9	344.2
102.5°	425.1	440.4	450.3	452.9	450.3
105°	541.0	548.2	553.6	558.1	558.1
107.5°	656.0	666.8	666.8	668.6	656.0
110°	767.5	781.8	781.8	781.8	774.7

TEST NUMBER: P903170

CATALOG NUMBER: DFN2DIP-PN4F0-040D100US830-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	887.9	903.1	900.5	893.2	887.9
115°	1006.5	1020.9	1016.4	1013.7	1006.5
117.5°	1124.3	1144.1	1131.4	1124.3	1117.0
120°	1242.8	1262.6	1242.8	1242.8	1234.8
122.5°	1350.7	1375.8	1363.3	1356.1	1350.7
125°	1464.0	1486.4	1479.2	1471.1	1468.5
127.5°	1574.5	1602.3	1592.4	1581.7	1574.5
130°	1677.8	1710.1	1705.7	1700.3	1690.4
132.5°	1793.8	1818.9	1820.7	1808.2	1800.9
135°	1893.5	1921.4	1926.7	1924.1	1916.8
137.5°	2005.0	2027.4	2031.9	2030.1	2019.3
140°	2102.9	2125.3	2138.0	2138.0	2128.1
142.5°	2203.6	2226.0	2233.2	2235.9	2226.0
145°	2298.8	2316.8	2331.2	2333.8	2323.9
147.5°	2384.2	2406.7	2417.4	2422.0	2412.1
150°	2472.3	2487.6	2497.5	2505.5	2497.5
152.5°	2550.4	2565.7	2578.3	2588.2	2578.3
155°	2628.7	2635.8	2643.9	2656.5	2648.4
157.5°	2696.0	2701.4	2705.9	2723.9	2711.3
160°	2756.3	2761.6	2764.3	2779.6	2768.8
162.5°	2812.0	2812.0	2814.6	2831.7	2819.1
165°	2859.6	2856.8	2856.8	2874.8	2862.3
167.5°	2902.7	2894.6	2894.6	2912.6	2900.0
170°	2935.1	2927.9	2925.2	2943.2	2927.9
172.5°	2957.5	2950.3	2947.6	2965.6	2950.3
175°	2975.5	2968.3	2963.0	2980.9	2965.6
177.5°	2985.4	2978.2	2972.8	2988.0	2972.8
180°	2980.9	2980.9	2980.9	2980.9	2980.9

TEST NUMBER: P903170

CATALOG NUMBER: DFN2DIP-PN4F0-040D100US830-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.06	5.74	6.19	6.86	8.41	1.02	1.70	2.15	2.82	4.38
	3H	6.73	7.33	7.87	8.46	10.03	2.20	2.80	3.34	3.93	5.51
	4H	7.33	7.90	8.48	9.03	10.61	2.64	3.22	3.79	4.35	5.93
	6H	7.75	8.27	8.90	9.41	11.00	2.96	3.49	4.11	4.62	6.21
	8H	7.87	8.37	9.03	9.52	11.10	3.04	3.55	4.20	4.69	6.27
	12H	7.93	8.40	9.09	9.54	11.15	3.08	3.56	4.25	4.70	6.30
4H	2H	5.06	5.63	6.21	6.76	8.34	1.60	2.17	2.76	3.30	4.88
	3H	6.88	7.35	8.04	8.51	10.10	2.94	3.42	4.10	4.57	6.16
	4H	7.56	8.00	8.73	9.15	10.76	3.48	3.92	4.64	5.06	6.67
	6H	8.07	8.45	9.24	9.62	11.22	3.89	4.27	5.06	5.43	7.03
	8H	8.25	8.60	9.41	9.76	11.37	4.02	4.37	5.19	5.53	7.14
	12H	8.34	8.66	9.52	9.82	11.45	4.08	4.39	5.26	5.56	7.19
8H	4H	7.52	7.87	8.69	9.03	10.65	3.75	4.10	4.92	5.26	6.88
	6H	8.08	8.37	9.27	9.57	11.19	4.26	4.55	5.45	5.75	7.37
	8H	8.30	8.55	9.49	9.73	11.37	4.46	4.71	5.65	5.89	7.52
	12H	8.44	8.66	9.63	9.83	11.50	4.57	4.79	5.76	5.97	7.63
12H	4H	7.47	7.78	8.65	8.95	10.57	3.75	4.07	4.93	5.24	6.86
	6H	8.06	8.31	9.25	9.49	11.12	4.31	4.57	5.51	5.74	7.38
	8H	8.27	8.50	9.47	9.67	11.34	4.52	4.74	5.71	5.92	7.58

END OF REPORT