

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903195

Luminaire Tested: DFN2DIP-PN4F0-050D070US830-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903195
REPORT IS A COMBINATION OF REPORTS P901186 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-050D070US830-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10537.6 lumens
Efficiency: N/A
Efficacy: 109.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 96.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903195

CATALOG NUMBER: DFN2DIP-PN4F0-050D070US830-RLLONL

Luminous Intensity Polar Plot

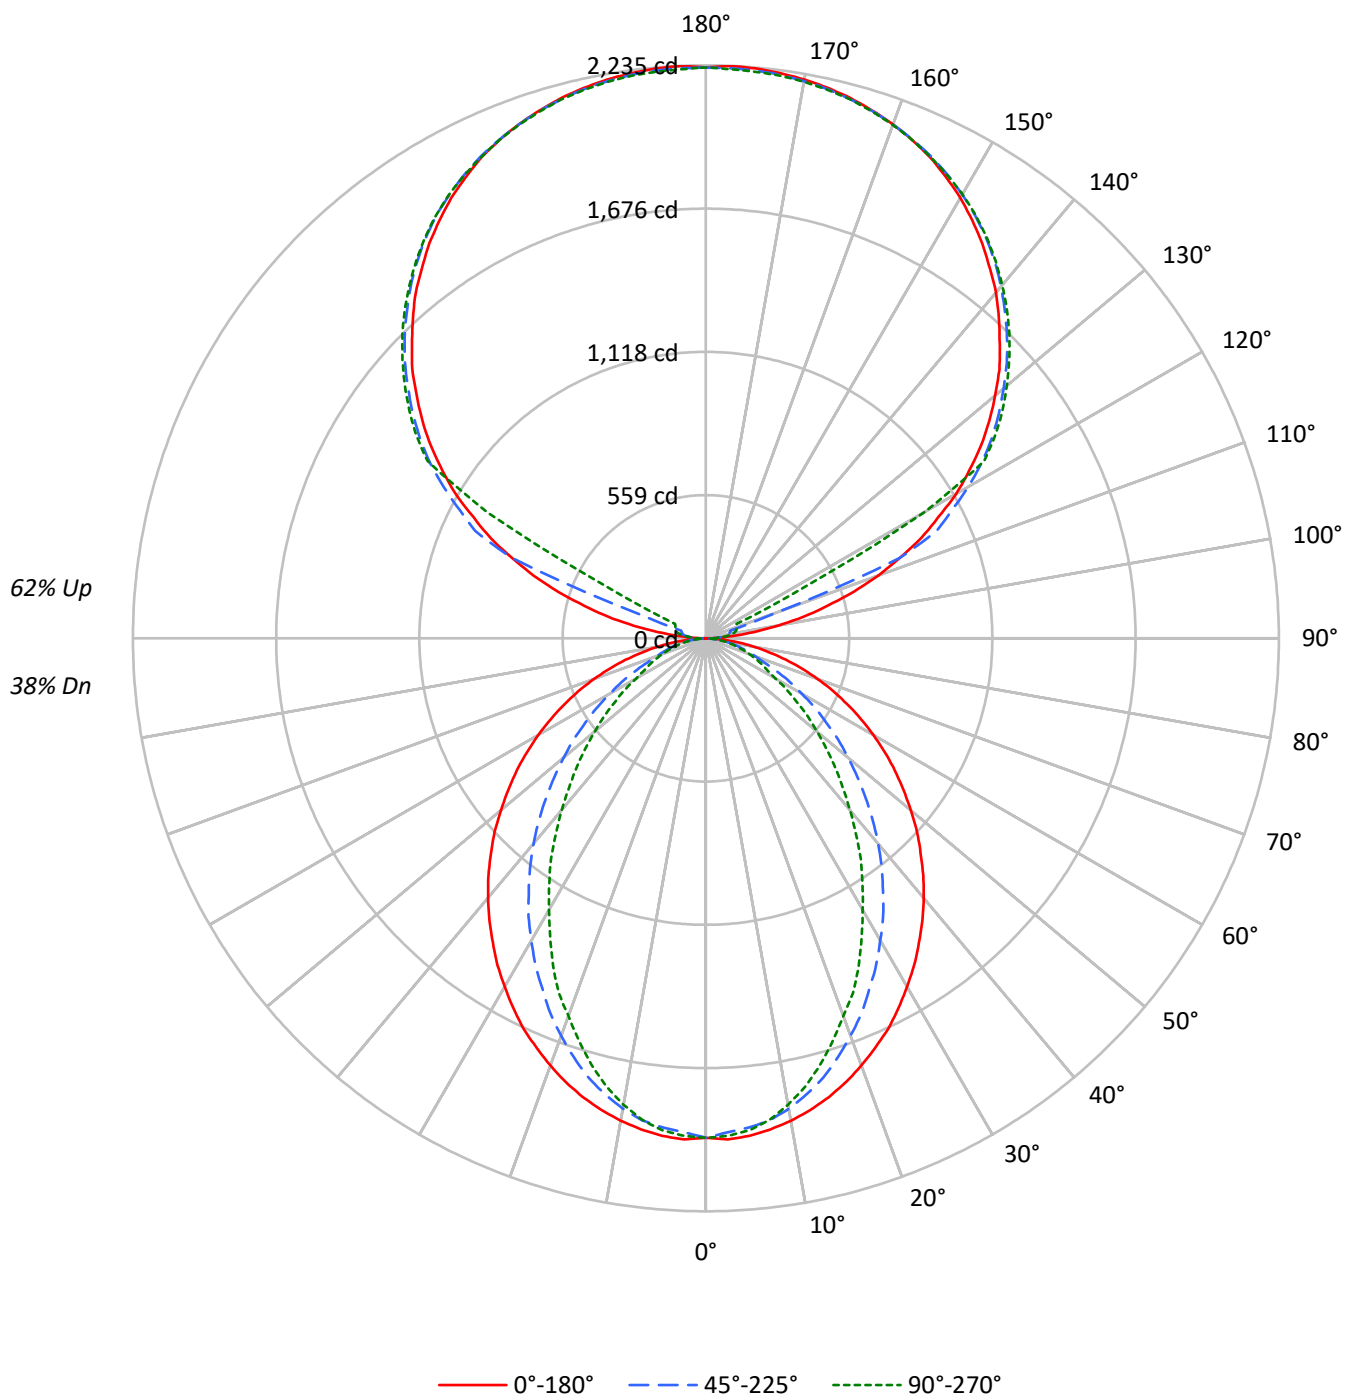

TEST NUMBER: P903195

CATALOG NUMBER: DFN2DIP-PN4F0-050D070US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45
1	95	91	88	84	87	83	80	77	68	66	64	54	52	51	40	40	39
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	35	33
3	80	71	64	58	72	65	59	54	53	49	45	42	39	37	32	30	29
4	73	63	55	50	66	57	51	46	47	42	39	38	34	32	29	27	25
5	67	56	48	43	61	51	45	40	42	37	34	34	31	28	26	24	22
6	62	50	43	37	56	46	39	34	38	33	29	31	27	24	24	22	20
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	18
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16
9	50	38	31	26	45	35	28	24	29	24	21	24	20	18	19	16	14
10	46	35	28	23	42	32	26	22	27	22	19	22	18	16	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1422	1422	1422
5°	1424	1399	1408
10°	1410	1372	1363
15°	1391	1327	1292
20°	1365	1265	1206
25°	1339	1195	1122
30°	1303	1123	1015
35°	1269	1046	922
40°	1233	966	815
45°	1193	878	718
50°	1150	788	623
55°	1106	693	532
60°	1055	593	438
65°	996	491	395
70°	925	396	357
75°	835	350	326
80°	706	294	283
85°	492	197	215

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1193 cd/sqm

TEST NUMBER: P903195

CATALOG NUMBER: DFN2DIP-PN4F0-050D070US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	182.5	1.7
10°-20°	501.1	4.8
20°-30°	703.6	6.7
30°-40°	766.9	7.3
40°-50°	704.9	6.7
50°-60°	553.6	5.3
60°-70°	360.3	3.4
70°-80°	185.5	1.8
80°-90°	51.3	0.5
90°-100°	73.4	0.7
100°-110°	273.7	2.6
110°-120°	725.9	6.9
120°-130°	1204.0	11.4
130°-140°	1278.9	12.1
140°-150°	1188.6	11.3
150°-160°	955.6	9.1
160°-170°	615.8	5.8
170°-180°	211.9	2.0
0°-30°	1387.2	13.2
0°-40°	2154.2	20.4
0°-60°	3412.7	32.4
0°-90°	4009.7	38.1
90°-120°	1073.0	10.2
90°-150°	4744.6	45.0
90°-180°	6528.0	61.9
0°-180°	10537.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1948	1948	1948	1948	1948	
5°	1948	1939	1916	1932	1927	185
15°	1853	1833	1773	1740	1722	522
25°	1682	1625	1509	1437	1410	773
35°	1449	1359	1204	1093	1054	907
45°	1185	1066	881	756	714	915
55°	901	763	573	467	434	805
65°	608	465	307	247	242	603
75°	324	201	141	129	127	343
85°	76	39	34	34	34	87
90°	2	19	32	40	44	10
95°	105	52	63	71	69	124
105°	490	538	98	116	122	523
115°	926	954	994	248	132	912
125°	1310	1331	1362	1373	1378	1168
135°	1621	1647	1661	1677	1674	1252
145°	1880	1879	1906	1917	1909	1176
155°	2070	2056	2075	2085	2072	954
165°	2182	2172	2177	2188	2177	616
175°	2232	2220	2224	2235	2219	212
180°	2227	2227	2227	2227	2227	

TEST NUMBER: P903195

CATALOG NUMBER: DFN2DIP-PN4F0-050D070US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1947.8	1947.8	1947.8	1947.8	1947.8
2.5°	1956.5	1947.8	1928.3	1946.1	1942.5
5°	1947.8	1939.0	1916.0	1931.8	1926.7
7.5°	1931.8	1921.4	1896.7	1903.7	1894.8
10°	1910.7	1898.4	1863.2	1857.8	1847.3
12.5°	1884.3	1868.5	1820.8	1810.3	1790.8
15°	1852.6	1833.2	1773.3	1739.8	1722.2
17.5°	1815.5	1787.3	1713.3	1674.5	1646.2
20°	1773.3	1738.0	1649.8	1605.9	1567.0
22.5°	1727.5	1686.9	1584.6	1524.8	1498.4
25°	1681.6	1625.1	1508.8	1436.6	1410.0
27.5°	1627.0	1567.0	1438.3	1355.5	1314.9
30°	1568.9	1501.8	1360.7	1270.9	1223.2
32.5°	1512.4	1431.3	1286.9	1181.0	1136.9
35°	1449.0	1359.1	1204.0	1092.9	1054.0
37.5°	1387.2	1290.2	1126.4	1004.7	960.7
40°	1322.0	1216.4	1045.2	920.1	874.3
42.5°	1255.1	1142.3	964.2	833.7	789.8
45°	1184.6	1066.4	881.4	756.1	713.8
47.5°	1117.6	992.5	802.1	676.8	638.1
50°	1043.6	918.4	724.5	602.8	565.9
52.5°	971.2	839.0	650.4	534.1	500.7
55°	900.7	763.2	572.8	467.1	433.7
57.5°	828.5	687.5	504.2	405.5	377.2
60°	754.4	613.4	431.8	342.0	313.8
62.5°	682.2	541.2	370.1	285.6	271.5
65°	608.1	465.3	306.7	246.9	241.5
67.5°	537.6	394.8	246.9	216.8	211.5
70°	463.6	326.1	204.4	186.8	179.7
72.5°	393.1	262.6	171.0	156.9	153.4
75°	324.3	200.9	141.0	128.7	127.0
77.5°	255.6	142.7	111.1	104.0	100.4
80°	192.1	102.3	84.5	77.6	77.6
82.5°	133.9	68.8	58.2	54.6	54.6
85°	75.8	38.7	33.5	33.5	33.5
87.5°	28.3	14.0	14.0	12.3	12.3
90°	1.5	19.3	32.1	40.3	43.5
92.5°	40.3	33.8	38.6	41.9	43.5
95°	104.6	51.5	62.8	71.0	69.3
97.5°	188.4	56.5	82.1	87.1	88.6
100°	285.3	64.5	91.8	104.6	107.9
102.5°	391.4	388.4	95.1	112.7	117.6
105°	489.8	538.2	98.3	115.9	122.4
107.5°	604.2	644.4	101.6	119.2	125.7
110°	713.9	747.5	282.0	120.9	127.2



TEST NUMBER: P903195

CATALOG NUMBER: DFN2DIP-PN4F0-050D070US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	817.0	845.8	818.5	123.9	128.9
115°	926.4	953.8	994.1	248.2	132.2
117.5°	1021.5	1053.7	1081.2	850.6	428.6
120°	1127.8	1152.0	1181.1	1200.4	982.9
122.5°	1218.0	1243.8	1276.2	1285.7	1287.4
125°	1309.9	1330.9	1361.5	1372.8	1377.5
127.5°	1393.6	1416.2	1440.5	1456.6	1458.1
130°	1472.6	1498.5	1516.1	1533.9	1532.4
132.5°	1553.2	1574.2	1591.9	1606.4	1604.9
135°	1620.9	1646.7	1661.1	1677.3	1674.1
137.5°	1691.7	1711.1	1727.3	1743.4	1738.6
140°	1761.0	1774.0	1791.6	1806.1	1798.1
142.5°	1819.1	1830.4	1851.2	1864.1	1856.1
145°	1880.4	1878.7	1906.0	1917.3	1909.3
147.5°	1933.3	1928.6	1956.0	1964.0	1957.7
150°	1985.0	1973.8	1999.6	2009.1	2001.1
152.5°	2028.4	2015.6	2039.8	2049.5	2038.2
155°	2070.4	2056.0	2075.3	2084.9	2072.1
157.5°	2104.2	2091.4	2105.9	2117.2	2104.2
160°	2133.4	2123.5	2133.4	2142.9	2131.6
162.5°	2159.0	2149.4	2157.4	2168.7	2154.2
165°	2181.5	2172.0	2176.7	2188.0	2176.7
167.5°	2199.3	2189.5	2194.5	2205.8	2191.3
170°	2213.8	2204.1	2207.3	2218.7	2204.1
172.5°	2223.5	2213.8	2217.1	2228.4	2213.8
175°	2231.5	2220.2	2223.5	2234.7	2218.7
177.5°	2234.7	2223.5	2225.2	2236.5	2221.9
180°	2226.7	2226.7	2226.7	2226.7	2226.7

TEST NUMBER: P903195

CATALOG NUMBER: DFN2DIP-PN4F0-050D070US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.15	7.89	8.21	8.95	10.38	3.11	3.86	4.17	4.91	6.35
	3H	8.82	9.48	9.89	10.55	12.00	4.30	4.96	5.36	6.03	7.48
	4H	9.43	10.06	10.51	11.13	12.59	4.74	5.37	5.82	6.44	7.90
	6H	9.85	10.43	10.94	11.50	12.97	5.06	5.64	6.15	6.71	8.18
	8H	9.97	10.52	11.07	11.61	13.08	5.15	5.70	6.24	6.79	8.25
	12H	10.03	10.55	11.13	11.64	13.13	5.19	5.71	6.29	6.79	8.28
4H	2H	7.16	7.78	8.24	8.85	10.31	3.70	4.33	4.79	5.40	6.86
	3H	8.98	9.50	10.07	10.60	12.07	5.04	5.56	6.14	6.66	8.13
	4H	9.67	10.15	10.77	11.24	12.73	5.59	6.07	6.69	7.15	8.65
	6H	10.18	10.59	11.29	11.70	13.19	6.00	6.41	7.11	7.52	9.01
	8H	10.36	10.74	11.47	11.84	13.35	6.13	6.51	7.24	7.62	9.12
	12H	10.45	10.80	11.57	11.91	13.42	6.19	6.54	7.32	7.65	9.16
8H	4H	9.63	10.02	10.74	11.12	12.62	5.86	6.25	6.97	7.35	8.85
	6H	10.20	10.51	11.33	11.66	13.16	6.38	6.70	7.51	7.84	9.34
	8H	10.42	10.69	11.55	11.82	13.34	6.57	6.85	7.71	7.97	9.49
	12H	10.55	10.80	11.69	11.92	13.47	6.69	6.93	7.82	8.05	9.61
12H	4H	9.58	9.93	10.70	11.04	12.55	5.86	6.21	6.99	7.33	8.83
	6H	10.17	10.45	11.31	11.57	13.09	6.43	6.71	7.56	7.83	9.35
	8H	10.39	10.64	11.53	11.76	13.31	6.64	6.88	7.77	8.00	9.56

END OF REPORT