

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903279

Luminaire Tested: DFN2DIP-PN4F0-070D100US830-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903279
REPORT IS A COMBINATION OF REPORTS P901244 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-070D100US830-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14939.3 lumens
Efficiency: N/A
Efficacy: 105.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 141.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903279

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US830-RLLONL

Luminous Intensity Polar Plot

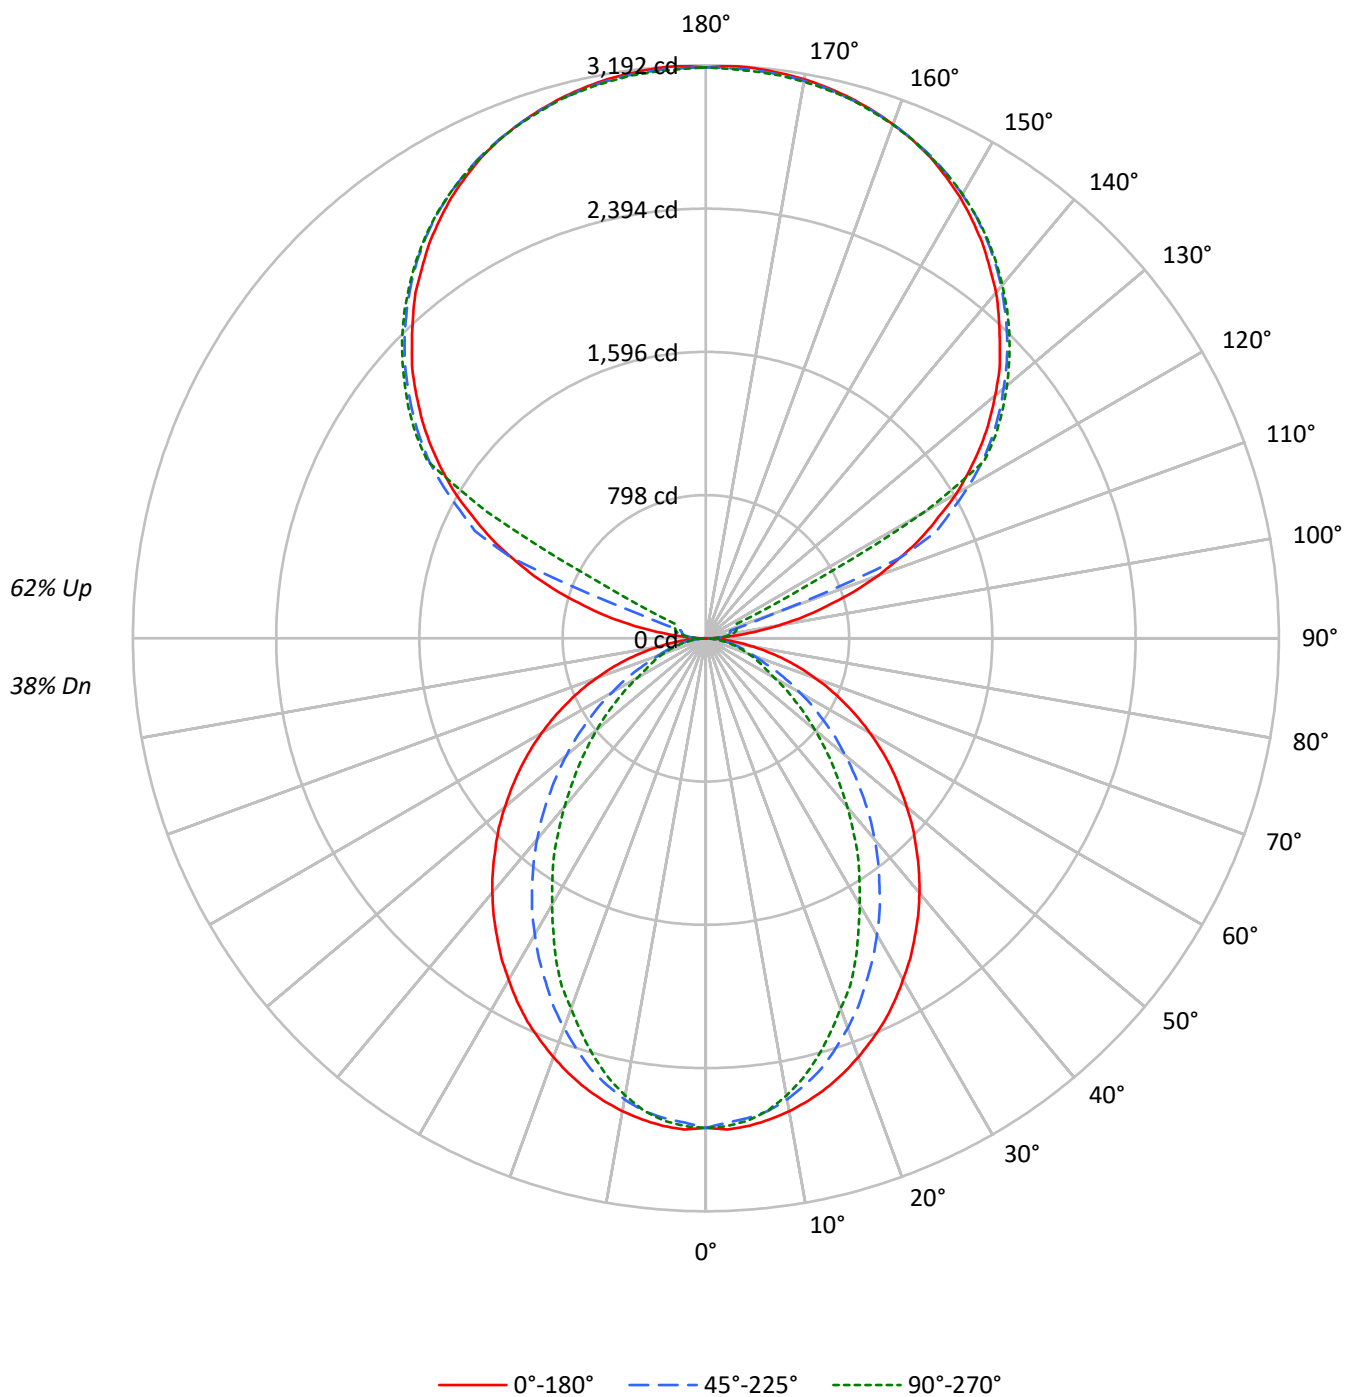

TEST NUMBER: P903279

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	76	76	76	60	60	60	45	45	45
1	95	91	88	84	86	83	80	77	67	65	63	53	52	51	40	39	38
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	34	33
3	80	71	64	58	72	64	58	54	53	48	45	42	39	37	32	30	28
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25
5	67	56	48	42	61	51	44	39	42	37	33	34	30	28	26	24	22
6	62	50	43	37	56	46	39	34	38	33	29	31	27	24	24	21	19
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	17
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16
9	49	38	30	26	45	35	28	24	29	24	21	24	20	17	19	16	14
10	46	35	28	23	42	32	26	21	27	22	19	22	18	16	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1991	1991	1991
5°	1994	1959	1972
10°	1974	1921	1908
15°	1947	1858	1809
20°	1911	1771	1688
25°	1874	1673	1571
30°	1825	1572	1422
35°	1776	1464	1291
40°	1727	1353	1141
45°	1670	1229	1005
50°	1610	1103	872
55°	1549	970	744
60°	1477	830	613
65°	1395	687	552
70°	1295	555	500
75°	1170	489	456
80°	988	412	397
85°	688	276	300

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1695 cd/sqm

TEST NUMBER: P903279

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	255.6	1.7
10°-20°	701.6	4.7
20°-30°	985.0	6.6
30°-40°	1073.7	7.2
40°-50°	986.9	6.6
50°-60°	775.0	5.2
60°-70°	504.5	3.4
70°-80°	259.7	1.7
80°-90°	71.9	0.5
90°-100°	104.9	0.7
100°-110°	391.0	2.6
110°-120°	1037.0	6.9
120°-130°	1720.0	11.5
130°-140°	1827.0	12.2
140°-150°	1698.0	11.4
150°-160°	1365.2	9.1
160°-170°	879.7	5.9
170°-180°	302.8	2.0
0°-30°	1942.1	13.0
0°-40°	3015.8	20.2
0°-60°	4777.7	32.0
0°-90°	5613.7	37.6
90°-120°	1532.9	10.3
90°-150°	6778.0	45.4
90°-180°	9326.0	62.4
0°-180°	14939.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2727	2727	2727	2727	2727	
5°	2727	2714	2682	2705	2697	259
15°	2594	2566	2483	2436	2411	731
25°	2354	2275	2112	2011	1974	1083
35°	2028	1903	1686	1530	1476	1270
45°	1658	1493	1234	1059	999	1281
55°	1261	1068	802	654	607	1127
65°	851	651	429	346	338	844
75°	454	281	197	180	178	480
85°	106	54	47	47	47	122
90°	2	28	46	58	62	14
95°	150	74	90	101	99	177
105°	700	769	140	166	175	748
115°	1323	1362	1420	354	189	1303
125°	1871	1901	1945	1961	1968	1669
135°	2316	2352	2373	2396	2392	1789
145°	2686	2684	2723	2739	2728	1680
155°	2958	2937	2965	2978	2960	1363
165°	3116	3103	3110	3126	3110	880
175°	3188	3172	3176	3192	3170	303
180°	3181	3181	3181	3181	3181	

TEST NUMBER: P903279

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2726.9	2726.9	2726.9	2726.9	2726.9
2.5°	2739.1	2726.9	2699.6	2724.5	2719.5
5°	2726.9	2714.5	2682.4	2704.6	2697.3
7.5°	2704.6	2689.9	2655.4	2665.0	2652.8
10°	2675.0	2657.8	2608.5	2600.9	2586.2
12.5°	2638.1	2615.8	2549.1	2534.4	2507.2
15°	2593.6	2566.4	2482.6	2435.7	2411.1
17.5°	2541.8	2502.3	2398.6	2344.3	2304.8
20°	2482.6	2433.1	2309.8	2248.2	2193.8
22.5°	2418.5	2361.6	2218.4	2134.6	2097.7
25°	2354.3	2275.2	2112.3	2011.3	1974.2
27.5°	2277.8	2193.8	2013.6	1897.7	1840.9
30°	2196.4	2102.4	1905.0	1779.3	1712.6
32.5°	2117.3	2003.8	1801.6	1653.4	1591.6
35°	2028.5	1902.6	1685.6	1530.1	1475.6
37.5°	1942.2	1806.3	1577.0	1406.5	1345.0
40°	1850.8	1702.9	1463.3	1288.2	1224.0
42.5°	1757.1	1599.2	1349.9	1167.2	1105.7
45°	1658.4	1492.9	1234.0	1058.6	999.4
47.5°	1564.6	1389.5	1122.9	947.5	893.3
50°	1460.9	1285.8	1014.3	843.9	792.3
52.5°	1359.6	1174.5	910.6	747.7	700.9
55°	1260.9	1068.5	801.9	654.0	607.2
57.5°	1159.9	962.4	705.9	567.6	528.1
60°	1056.2	858.8	604.5	478.9	439.3
62.5°	955.1	757.7	518.1	399.8	380.1
65°	851.4	651.4	429.4	345.6	338.0
67.5°	752.7	552.7	345.6	303.4	296.1
70°	649.0	456.6	286.2	261.6	251.6
72.5°	550.4	367.6	239.3	219.7	214.7
75°	454.0	281.2	197.4	180.1	177.8
77.5°	357.9	199.7	155.5	145.5	140.6
80°	268.9	143.2	118.4	108.7	108.7
82.5°	187.5	96.3	81.4	76.4	76.4
85°	106.0	54.2	46.8	46.8	46.8
87.5°	39.5	19.6	19.6	17.2	17.2
90°	2.2	27.6	45.9	57.7	62.0
92.5°	57.7	48.4	55.2	59.9	62.0
95°	149.5	73.5	89.6	101.4	99.0
97.5°	269.2	80.6	117.3	124.3	126.6
100°	407.6	92.1	131.2	149.5	154.2
102.5°	559.2	554.9	135.8	161.0	168.1
105°	699.7	768.8	140.5	165.6	174.9
107.5°	863.2	920.6	145.2	170.3	179.6
110°	1019.7	1067.9	402.8	172.8	181.7

TEST NUMBER: P903279

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1167.1	1208.3	1169.3	177.1	184.3
115°	1323.4	1362.5	1420.2	354.5	188.9
117.5°	1459.2	1505.2	1544.5	1215.2	612.3
120°	1611.3	1645.7	1687.2	1714.9	1404.1
122.5°	1740.0	1776.9	1823.1	1836.7	1839.2
125°	1871.2	1901.3	1945.0	1961.1	1967.9
127.5°	1990.9	2023.2	2057.9	2080.9	2083.0
130°	2103.8	2140.7	2165.9	2191.2	2189.1
132.5°	2218.8	2248.9	2274.1	2294.8	2292.6
135°	2315.6	2352.5	2373.0	2396.2	2391.6
137.5°	2416.8	2444.4	2467.6	2490.6	2483.7
140°	2515.6	2534.3	2559.4	2580.2	2568.7
142.5°	2598.8	2614.9	2644.7	2663.0	2651.6
145°	2686.2	2683.8	2722.9	2739.0	2727.5
147.5°	2761.9	2755.1	2794.2	2805.7	2796.7
150°	2835.7	2819.6	2856.6	2870.2	2858.7
152.5°	2897.8	2879.5	2914.0	2927.8	2911.7
155°	2957.7	2937.2	2964.8	2978.4	2960.1
157.5°	3006.1	2987.8	3008.5	3024.6	3006.1
160°	3047.6	3033.7	3047.6	3061.3	3045.2
162.5°	3084.2	3070.5	3082.0	3098.1	3077.4
165°	3116.4	3102.8	3109.6	3125.8	3109.6
167.5°	3141.9	3127.9	3135.1	3151.2	3130.4
170°	3162.6	3148.8	3153.4	3169.5	3148.8
172.5°	3176.3	3162.6	3167.3	3183.4	3162.6
175°	3187.8	3171.7	3176.3	3192.5	3169.5
177.5°	3192.5	3176.3	3178.8	3194.9	3174.1
180°	3181.0	3181.0	3181.0	3181.0	3181.0

TEST NUMBER: P903279

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.26	9.00	9.33	10.06	11.50	4.23	4.97	5.29	6.03	7.47
	3H	9.94	10.60	11.01	11.67	13.13	5.41	6.07	6.48	7.14	8.60
	4H	10.54	11.17	11.63	12.24	13.71	5.86	6.48	6.94	7.55	9.02
	6H	10.96	11.54	12.05	12.61	14.09	6.17	6.75	7.27	7.82	9.30
	8H	11.09	11.63	12.18	12.72	14.20	6.26	6.81	7.36	7.90	9.37
	12H	11.15	11.67	12.25	12.75	14.25	6.30	6.82	7.40	7.91	9.40
4H	2H	8.27	8.89	9.36	9.97	11.43	4.81	5.44	5.90	6.51	7.98
	3H	10.09	10.61	11.19	11.71	13.19	6.16	6.68	7.25	7.78	9.25
	4H	10.78	11.26	11.89	12.35	13.85	6.70	7.18	7.80	8.27	9.77
	6H	11.30	11.71	12.41	12.82	14.31	7.12	7.53	8.23	8.64	10.13
	8H	11.47	11.85	12.58	12.96	14.47	7.24	7.63	8.35	8.73	10.24
	12H	11.56	11.91	12.69	13.03	14.54	7.31	7.65	8.43	8.77	10.28
8H	4H	10.75	11.13	11.85	12.23	13.74	6.98	7.36	8.09	8.46	9.97
	6H	11.31	11.63	12.44	12.77	14.28	7.49	7.81	8.62	8.95	10.46
	8H	11.53	11.80	12.67	12.93	14.46	7.68	7.96	8.82	9.09	10.61
	12H	11.67	11.91	12.81	13.03	14.59	7.80	8.04	8.94	9.17	10.73
12H	4H	10.69	11.04	11.82	12.16	13.67	6.98	7.32	8.10	8.44	9.95
	6H	11.29	11.56	12.42	12.69	14.21	7.54	7.82	8.68	8.95	10.47
	8H	11.51	11.75	12.65	12.87	14.43	7.75	7.99	8.89	9.12	10.68

END OF REPORT