

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903367

Luminaire Tested: DFN2DIP-PN4F0-100D050US830-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903367
REPORT IS A COMBINATION OF REPORTS P901160 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-100D050US830-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12677.2 lumens
Efficiency: N/A
Efficacy: 91.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 138.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903367

CATALOG NUMBER: DFN2DIP-PN4F0-100D050US830-RLLONL

Luminous Intensity Polar Plot

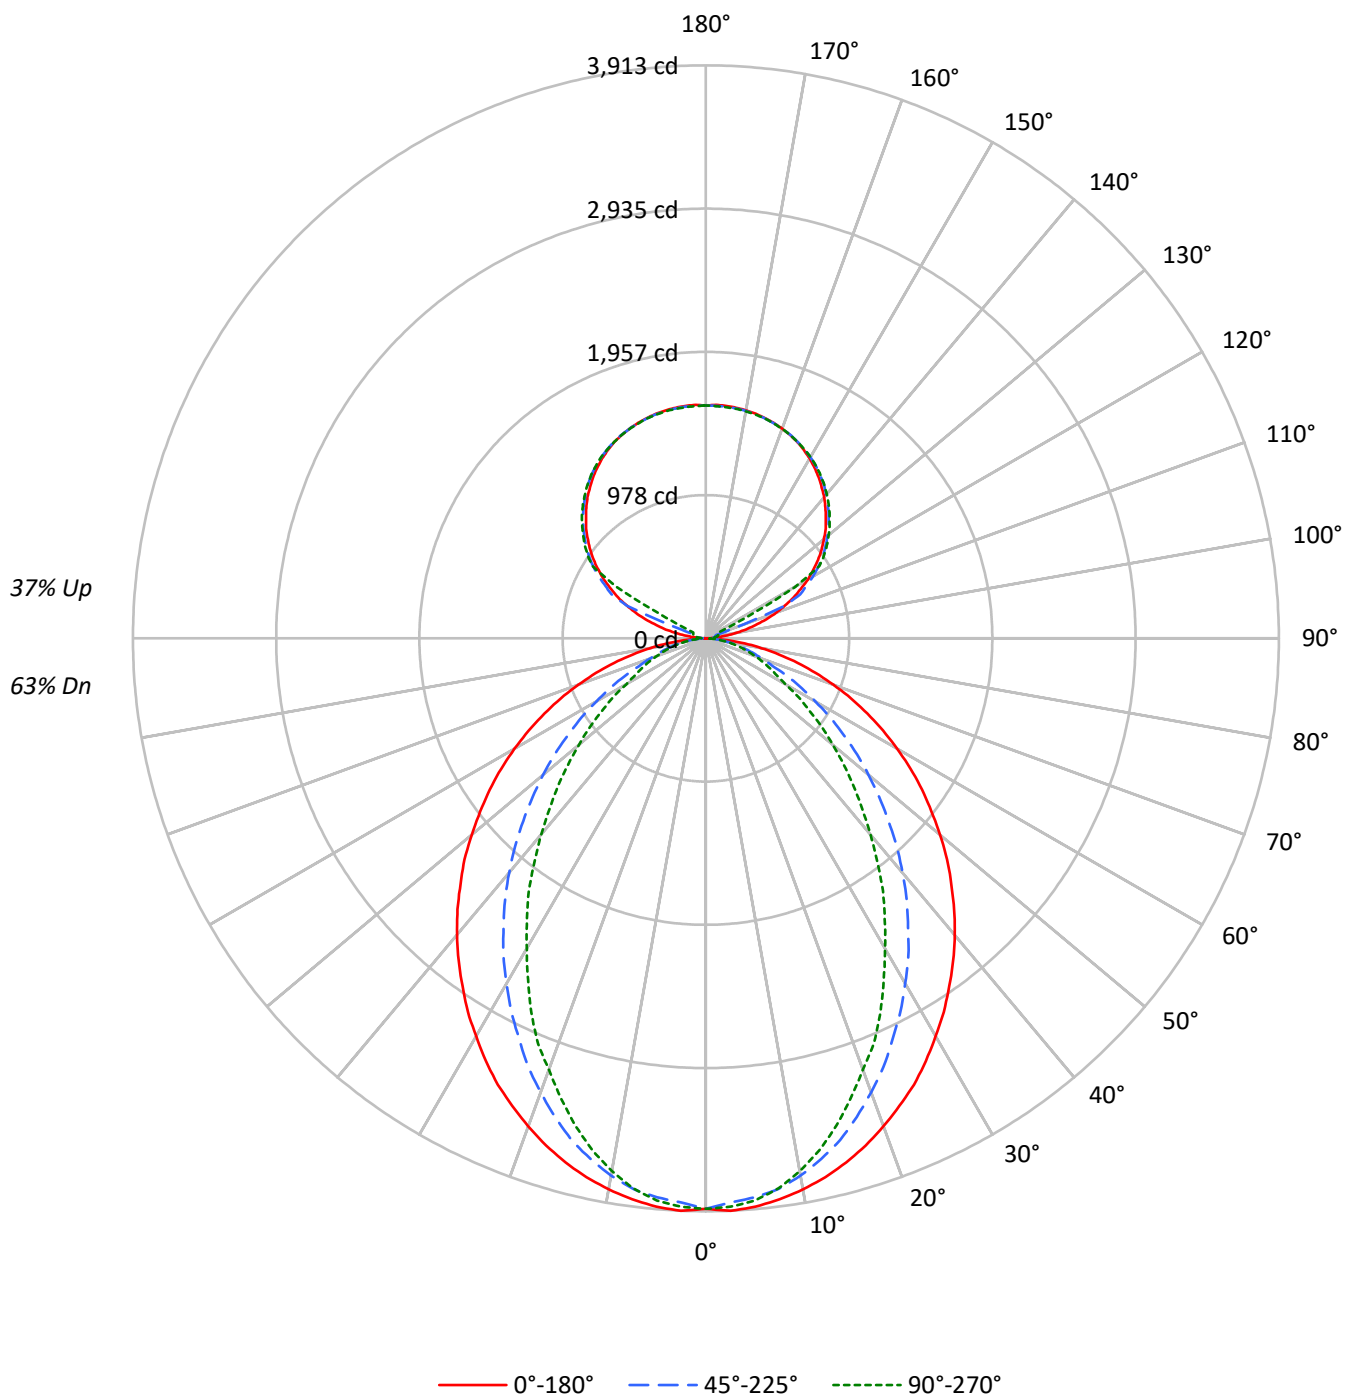

TEST NUMBER: P903367

CATALOG NUMBER: DFN2DIP-PN4F0-100D050US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68
1	101	97	93	90	95	91	88	85	80	78	76	71	69	67	61	60	59
2	93	86	80	75	87	81	75	71	71	67	64	63	60	57	55	52	51
3	85	76	69	63	80	72	65	60	63	58	54	56	52	49	49	46	44
4	78	68	60	54	73	64	57	52	57	51	47	50	46	43	44	41	38
5	72	61	53	47	67	57	50	45	51	45	41	46	41	37	40	37	34
6	67	55	47	41	62	52	45	39	46	41	36	41	37	33	37	33	30
7	62	50	42	36	58	47	40	35	42	36	32	38	33	30	34	30	27
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	27	24
9	54	42	34	29	51	40	33	28	36	30	26	32	27	24	29	25	22
10	50	38	31	26	47	37	30	25	33	28	24	30	25	22	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2844	2844	2844
5°	2848	2799	2817
10°	2820	2744	2726
15°	2781	2654	2584
20°	2730	2529	2411
25°	2677	2389	2244
30°	2606	2246	2031
35°	2537	2092	1844
40°	2467	1932	1630
45°	2385	1755	1436
50°	2301	1576	1246
55°	2212	1385	1063
60°	2110	1185	876
65°	1992	982	789
70°	1850	792	715
75°	1671	699	651
80°	1411	588	567
85°	983	394	429

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2385 cd/sqm

TEST NUMBER: P903367

CATALOG NUMBER: DFN2DIP-PN4F0-100D050US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	365.1	2.9
10°-20°	1002.2	7.9
20°-30°	1407.1	11.1
30°-40°	1533.9	12.1
40°-50°	1409.8	11.1
50°-60°	1107.2	8.7
60°-70°	720.7	5.7
70°-80°	371.0	2.9
80°-90°	97.5	0.8
90°-100°	52.5	0.4
100°-110°	195.5	1.5
110°-120°	518.5	4.1
120°-130°	860.0	6.8
130°-140°	913.5	7.2
140°-150°	849.0	6.7
150°-160°	682.6	5.4
160°-170°	439.8	3.5
170°-180°	151.4	1.2
0°-30°	2774.5	21.9
0°-40°	4308.3	34.0
0°-60°	6825.3	53.8
0°-90°	8014.4	63.2
90°-120°	766.5	6.0
90°-150°	3389.0	26.7
90°-180°	4663.0	36.8
0°-180°	12677.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3896	3896	3896	3896	3896	
5°	3896	3878	3832	3864	3853	369
15°	3705	3666	3546	3480	3444	1044
25°	3363	3250	3018	2873	2820	1547
35°	2898	2718	2408	2186	2108	1814
45°	2369	2133	1763	1512	1428	1830
55°	1801	1526	1146	934	867	1610
65°	1216	931	613	494	483	1206
75°	649	402	282	257	254	686
85°	152	77	67	67	67	174
90°	1	14	23	29	31	12
95°	75	37	45	51	50	89
105°	350	384	70	83	88	374
115°	662	681	710	177	94	651
125°	936	951	972	980	984	834
135°	1158	1176	1186	1198	1196	894
145°	1343	1342	1361	1370	1364	840
155°	1479	1469	1482	1489	1480	681
165°	1558	1551	1555	1563	1555	440
175°	1594	1586	1588	1596	1585	152
180°	1590	1590	1590	1590	1590	

TEST NUMBER: P903367

CATALOG NUMBER: DFN2DIP-PN4F0-100D050US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3895.5	3895.5	3895.5	3895.5	3895.5
2.5°	3913.1	3895.5	3856.6	3892.1	3885.1
5°	3895.5	3877.9	3831.9	3863.8	3853.2
7.5°	3863.8	3842.7	3793.4	3807.2	3789.7
10°	3821.4	3796.7	3726.4	3715.6	3694.7
12.5°	3768.8	3736.9	3641.5	3620.6	3581.7
15°	3705.1	3666.2	3546.5	3479.6	3444.4
17.5°	3631.0	3574.6	3426.5	3349.0	3292.6
20°	3546.5	3475.8	3299.7	3211.8	3134.0
22.5°	3454.9	3373.7	3169.1	3049.5	2996.7
25°	3363.3	3250.4	3017.6	2873.2	2820.2
27.5°	3254.0	3134.0	2876.6	2710.9	2629.8
30°	3137.7	3003.4	2721.4	2541.9	2446.6
32.5°	3024.8	2862.4	2573.7	2362.0	2273.7
35°	2897.9	2718.1	2408.0	2185.8	2108.0
37.5°	2774.6	2580.4	2252.8	2009.3	1921.4
40°	2644.0	2432.7	2090.5	1840.2	1748.6
42.5°	2510.1	2284.5	1928.5	1667.5	1579.5
45°	2369.1	2132.7	1762.8	1512.2	1427.7
47.5°	2235.2	1985.0	1604.2	1353.6	1276.2
50°	2087.1	1836.8	1449.0	1205.5	1131.8
52.5°	1942.3	1677.9	1300.9	1068.2	1001.3
55°	1801.3	1526.4	1145.7	934.3	867.3
57.5°	1657.0	1374.9	1008.4	810.9	754.4
60°	1508.8	1226.8	863.7	684.1	627.6
62.5°	1364.4	1082.4	740.2	571.2	543.1
65°	1216.4	930.6	613.4	493.7	482.9
67.5°	1075.3	789.6	493.7	433.5	423.0
70°	927.2	652.3	408.8	373.6	359.5
72.5°	786.2	525.1	341.9	313.8	306.7
75°	648.6	401.7	282.0	257.3	253.9
77.5°	511.3	285.4	222.2	207.9	200.9
80°	384.1	204.6	169.1	155.2	155.2
82.5°	267.8	137.6	116.3	109.2	109.2
85°	151.5	77.4	66.9	66.9	66.9
87.5°	56.5	28.1	28.1	24.7	24.7
90°	1.1	13.8	23.0	28.8	31.0
92.5°	28.8	24.2	27.6	30.0	31.0
95°	74.7	36.8	44.9	50.7	49.5
97.5°	134.6	40.3	58.6	62.2	63.2
100°	203.8	46.1	65.6	74.7	77.1
102.5°	279.7	277.4	68.0	80.5	84.1
105°	349.9	384.5	70.2	82.8	87.5
107.5°	431.6	460.2	72.6	85.1	89.8
110°	509.9	534.0	201.4	86.3	90.9



TEST NUMBER: P903367

CATALOG NUMBER: DFN2DIP-PN4F0-100D050US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	583.5	604.2	584.7	88.6	92.1
115°	661.8	681.3	710.1	177.3	94.4
117.5°	729.6	752.6	772.3	607.6	306.1
120°	805.6	822.8	843.6	857.4	702.0
122.5°	870.0	888.4	911.5	918.4	919.6
125°	935.6	950.6	972.5	980.5	984.0
127.5°	995.4	1011.5	1029.0	1040.4	1041.5
130°	1051.9	1070.4	1082.9	1095.6	1094.6
132.5°	1109.5	1124.5	1137.0	1147.5	1146.3
135°	1157.8	1176.3	1186.5	1198.2	1195.8
137.5°	1208.3	1222.2	1233.8	1245.3	1241.9
140°	1257.8	1267.2	1279.7	1290.1	1284.4
142.5°	1299.4	1307.5	1322.4	1331.5	1325.8
145°	1343.1	1341.9	1361.4	1369.5	1363.8
147.5°	1381.0	1377.5	1397.1	1402.9	1398.4
150°	1417.9	1409.9	1428.2	1435.1	1429.4
152.5°	1448.9	1439.7	1457.0	1464.0	1455.9
155°	1478.8	1468.6	1482.3	1489.2	1480.1
157.5°	1503.0	1493.8	1504.2	1512.3	1503.0
160°	1523.8	1516.8	1523.8	1530.6	1522.6
162.5°	1542.1	1535.3	1541.0	1549.1	1538.7
165°	1558.2	1551.4	1554.8	1562.8	1554.8
167.5°	1570.9	1564.0	1567.5	1575.6	1565.2
170°	1581.3	1574.3	1576.7	1584.7	1574.3
172.5°	1588.2	1581.3	1583.7	1591.7	1581.3
175°	1593.9	1585.8	1588.2	1596.2	1584.7
177.5°	1596.2	1588.2	1589.4	1597.4	1587.1
180°	1590.4	1590.4	1590.4	1590.4	1590.4

TEST NUMBER: P903367

CATALOG NUMBER: DFN2DIP-PN4F0-100D050US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.94	12.89	12.78	13.75	14.82	7.90	8.85	8.74	9.71	10.78
	3H	13.63	14.48	14.48	15.35	16.45	9.10	9.95	9.96	10.82	11.92
	4H	14.24	15.05	15.11	15.92	17.03	9.56	10.36	10.43	11.23	12.34
	6H	14.67	15.41	15.56	16.29	17.42	9.89	10.62	10.77	11.51	12.63
	8H	14.80	15.51	15.70	16.41	17.53	9.98	10.68	10.87	11.58	12.70
	12H	14.87	15.54	15.77	16.43	17.58	10.03	10.70	10.92	11.59	12.74
4H	2H	11.97	12.77	12.85	13.65	14.76	8.51	9.32	9.39	10.19	11.30
	3H	13.81	14.48	14.70	15.39	16.51	9.88	10.54	10.76	11.45	12.57
	4H	14.51	15.12	15.41	16.02	17.17	10.43	11.04	11.33	11.94	13.09
	6H	15.04	15.56	15.95	16.49	17.64	10.86	11.38	11.77	12.31	13.46
	8H	15.22	15.70	16.13	16.63	17.79	10.99	11.48	11.90	12.40	13.56
	12H	15.32	15.76	16.25	16.70	17.87	11.06	11.50	11.99	12.44	13.61
8H	4H	14.49	14.98	15.41	15.90	17.07	10.72	11.21	11.64	12.13	13.30
	6H	15.06	15.47	16.01	16.43	17.60	11.24	11.65	12.19	12.61	13.78
	8H	15.28	15.64	16.23	16.59	17.78	11.44	11.79	12.39	12.75	13.93
	12H	15.43	15.74	16.38	16.69	17.92	11.56	11.88	12.52	12.82	14.06
12H	4H	14.45	14.89	15.38	15.83	17.00	10.73	11.17	11.67	12.11	13.28
	6H	15.04	15.40	15.99	16.35	17.53	11.29	11.65	12.25	12.61	13.79
	8H	15.27	15.58	16.22	16.53	17.76	11.51	11.83	12.47	12.77	14.01