

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903440

Luminaire Tested: DFN2DIP-PN4F0-120D060US830-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903440
REPORT IS A COMBINATION OF REPORTS P899661 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-120D060US830-FLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 16202.3 lumens
Efficiency: N/A
Efficacy: 94.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 171.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903440
CATALOG NUMBER: DFN2DIP-PN4F0-120D060US830-FLLFLL

Luminous Intensity Polar Plot

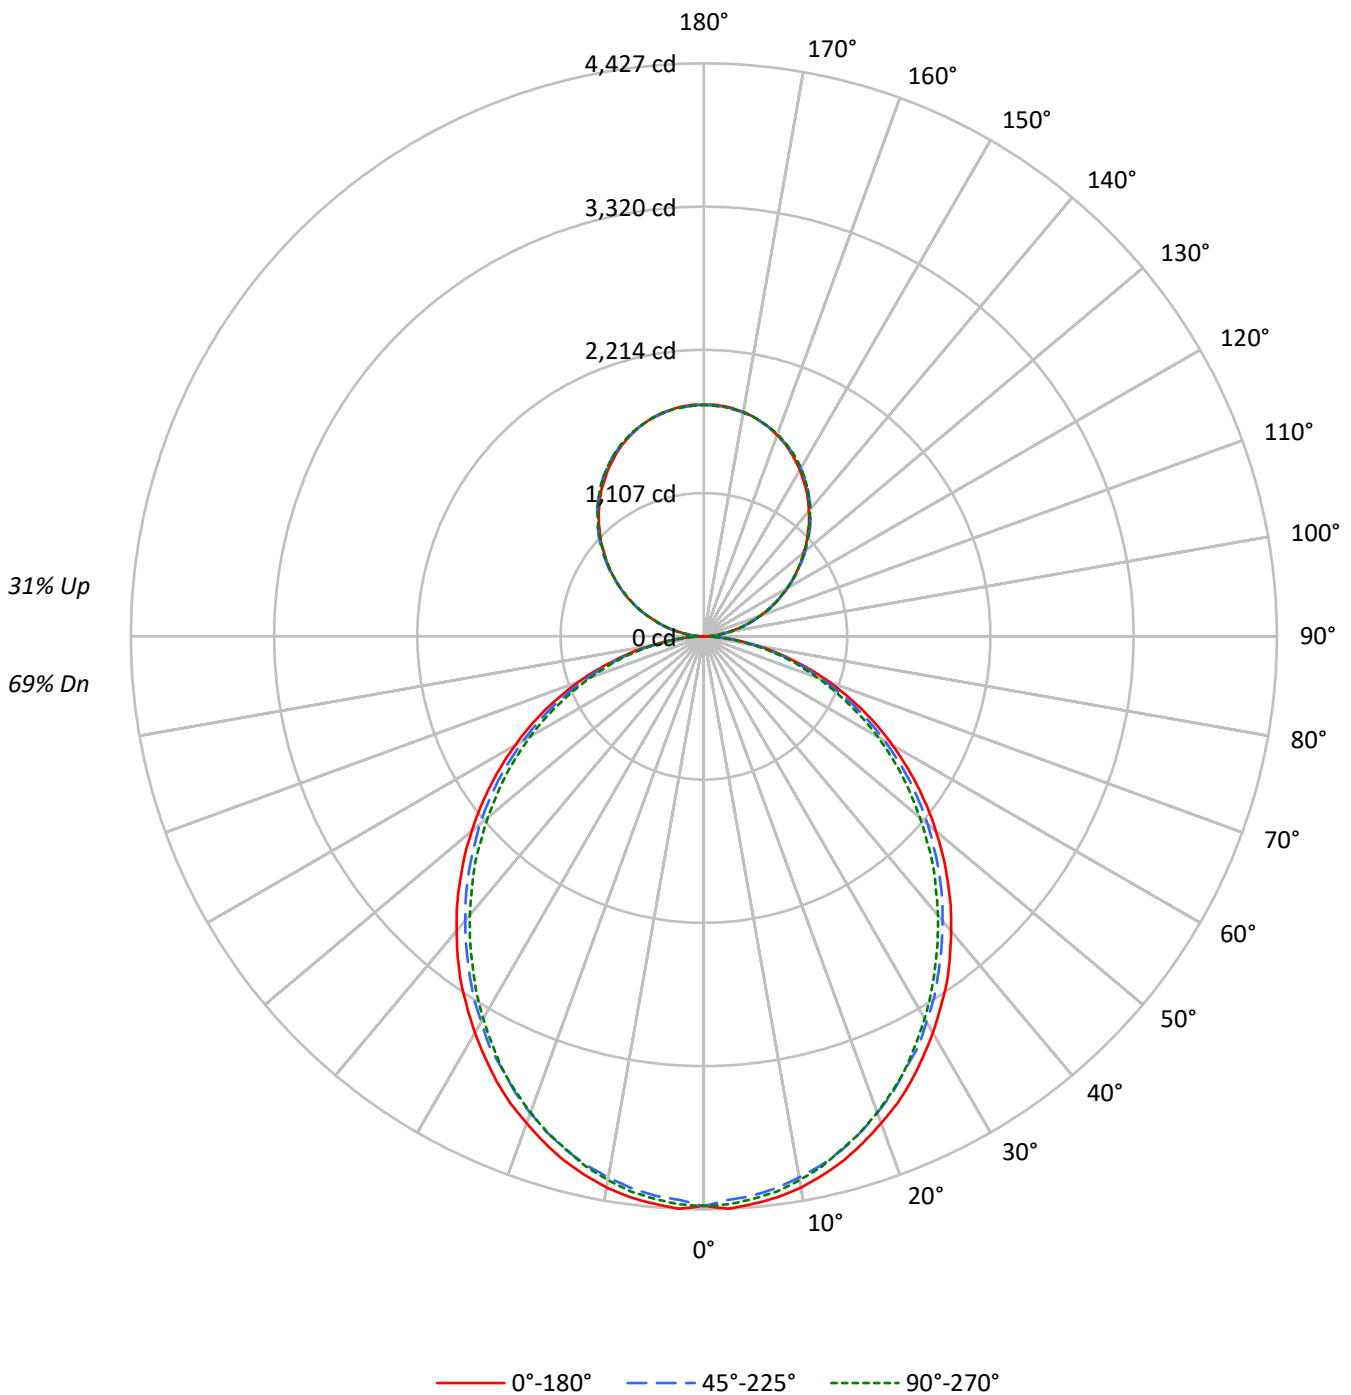



TEST NUMBER: P903440

CATALOG NUMBER: DFN2DIP-PN4F0-120D060US830-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	112	112	112	112	106	106	106	106	94	94	94	83	83	83	74	74	74	69			
1	102	98	94	90	96	92	89	86	83	80	77	74	71	70	65	64	62	58			
2	93	85	79	74	88	81	75	70	72	68	64	65	61	58	57	55	52	49			
3	85	75	67	61	80	71	64	59	64	58	54	57	53	49	51	48	45	41			
4	78	67	58	52	73	63	56	50	57	51	46	51	46	42	46	42	39	35			
5	71	59	51	45	67	56	49	43	51	45	40	46	41	37	41	37	34	31			
6	66	53	45	39	62	51	43	38	46	40	35	41	36	32	37	33	30	27			
7	61	48	40	34	58	46	39	33	42	36	31	38	33	29	34	30	26	24			
8	57	44	36	31	54	42	35	30	38	32	28	35	29	26	31	27	24	22			
9	53	40	33	27	50	39	31	26	35	29	25	32	27	23	29	25	21	19			
10	50	37	30	25	47	36	29	24	32	27	22	30	25	21	27	23	20	18			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3213	3213	3213
5°	3218	3168	3190
10°	3192	3126	3147
15°	3145	3075	3080
20°	3081	3004	3012
25°	3018	2919	2932
30°	2939	2840	2831
35°	2864	2746	2725
40°	2772	2652	2623
45°	2680	2557	2519
50°	2579	2458	2399
55°	2474	2343	2288
60°	2355	2207	2161
65°	2226	2066	2012
70°	2060	1894	1852
75°	1831	1689	1704
80°	1556	1427	1421
85°	1125	974	951

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2680 cd/sqm



TEST NUMBER: P903440

CATALOG NUMBER: DFN2DIP-PN4F0-120D060US830-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	414.2	2.6
10°-20°	1165.5	7.2
20°-30°	1712.8	10.6
30°-40°	1989.3	12.3
40°-50°	1986.8	12.3
50°-60°	1732.4	10.7
60°-70°	1280.6	7.9
70°-80°	724.6	4.5
80°-90°	196.3	1.2
90°-100°	110.7	0.7
100°-110°	351.6	2.2
110°-120°	601.8	3.7
120°-130°	791.4	4.9
130°-140°	888.4	5.5
140°-150°	871.1	5.4
150°-160°	730.8	4.5
160°-170°	484.6	3.0
170°-180°	169.4	1.0
0°-30°	3292.4	20.3
0°-40°	5281.7	32.6
0°-60°	9000.9	55.6
0°-90°	11202.5	69.1
90°-120°	1064.1	6.6
90°-150°	3615.0	22.3
90°-180°	5000.0	30.9
0°-180°	16202.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4401	4401	4401	4401	4401	
5°	4401	4384	4338	4371	4363	418
15°	4190	4164	4109	4126	4105	1180
25°	3792	3758	3686	3694	3686	1745
35°	3271	3229	3161	3136	3115	2043
45°	2662	2632	2569	2522	2505	2054
55°	2015	1989	1938	1888	1866	1801
65°	1359	1333	1291	1253	1232	1343
75°	711	703	681	656	664	759
85°	173	169	165	152	148	193
90°	2	19	53	50	51	15
95°	79	94	96	96	94	88
105°	325	329	332	335	335	343
115°	604	613	610	608	604	597
125°	878	892	888	883	881	785
135°	1136	1153	1156	1154	1150	878
145°	1379	1390	1399	1400	1394	862
155°	1577	1582	1586	1594	1589	726
165°	1716	1714	1714	1725	1717	484
175°	1785	1781	1778	1789	1779	170
180°	1789	1789	1789	1789	1789	



TEST NUMBER: P903440

CATALOG NUMBER: DFN2DIP-PN4F0-120D060US830-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4401.0	4401.0	4401.0	4401.0	4401.0
2.5°	4426.6	4405.4	4358.8	4401.0	4392.9
5°	4401.0	4384.3	4337.7	4371.3	4363.2
7.5°	4371.3	4346.2	4299.5	4333.6	4325.1
10°	4325.1	4295.4	4244.7	4278.4	4265.9
12.5°	4261.3	4236.2	4185.5	4206.6	4198.0
15°	4189.5	4164.3	4109.1	4126.2	4105.1
17.5°	4100.6	4075.5	4020.2	4041.3	4020.2
20°	4003.2	3978.0	3918.8	3931.3	3914.8
22.5°	3906.2	3868.0	3812.8	3812.8	3804.3
25°	3791.7	3758.0	3686.2	3694.3	3686.2
27.5°	3664.6	3635.0	3580.2	3567.6	3546.6
30°	3538.0	3503.9	3440.6	3428.0	3411.0
32.5°	3402.4	3377.3	3309.5	3283.9	3266.9
35°	3271.3	3229.1	3161.3	3135.7	3114.6
37.5°	3123.1	3085.0	3017.2	2987.6	2966.5
40°	2971.0	2936.9	2869.0	2831.3	2814.2
42.5°	2822.8	2788.7	2721.3	2678.7	2653.5
45°	2662.0	2632.4	2568.6	2522.4	2505.4
47.5°	2505.4	2475.7	2407.9	2361.3	2336.1
50°	2340.1	2319.0	2259.7	2200.5	2179.3
52.5°	2179.3	2149.8	2095.0	2048.2	2018.6
55°	2014.6	1989.0	1938.2	1887.5	1866.4
57.5°	1849.4	1828.2	1773.0	1722.3	1705.2
60°	1684.1	1667.5	1608.3	1561.6	1549.0
62.5°	1523.4	1493.7	1451.6	1409.4	1392.3
65°	1358.7	1333.0	1290.8	1252.6	1231.6
67.5°	1189.4	1167.8	1130.1	1100.5	1083.5
70°	1032.6	1015.6	977.4	947.8	931.2
72.5°	871.9	854.9	833.8	804.2	791.5
75°	710.8	702.7	681.1	656.0	664.5
77.5°	567.0	550.0	541.5	528.9	516.3
80°	423.4	418.9	410.4	397.8	389.3
82.5°	287.8	287.8	283.8	266.7	266.7
85°	173.3	169.3	165.2	152.2	148.2
87.5°	76.3	67.8	59.3	46.7	42.2
90°	1.6	19.4	52.9	49.6	51.2
92.5°	33.5	45.3	46.9	48.5	48.5
95°	78.7	93.8	96.5	96.5	93.8
97.5°	131.0	145.1	151.0	151.0	151.0
100°	191.4	203.8	208.1	208.1	206.5
102.5°	255.1	264.2	270.1	271.7	270.1
105°	324.6	328.9	332.2	334.9	334.9
107.5°	393.6	400.1	400.1	401.1	393.6
110°	460.5	469.1	469.1	469.1	464.8



TEST NUMBER: P903440

CATALOG NUMBER: DFN2DIP-PN4F0-120D060US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	532.7	541.9	540.3	535.9	532.7
115°	603.9	612.6	609.8	608.2	603.9
117.5°	674.6	686.5	678.8	674.6	670.2
120°	745.7	757.6	745.7	745.7	740.8
122.5°	810.4	825.5	817.9	813.7	810.4
125°	878.4	891.8	887.5	882.7	881.1
127.5°	944.7	961.4	955.5	949.0	944.7
130°	1006.7	1026.1	1023.4	1020.2	1014.3
132.5°	1076.3	1091.4	1092.4	1084.9	1080.5
135°	1136.1	1152.8	1156.0	1154.4	1150.1
137.5°	1203.0	1216.4	1219.2	1218.0	1211.6
140°	1261.8	1275.3	1282.8	1282.8	1276.9
142.5°	1322.1	1335.6	1339.9	1341.5	1335.6
145°	1379.3	1390.1	1398.7	1400.3	1394.4
147.5°	1430.5	1444.0	1450.5	1453.1	1447.2
150°	1483.4	1492.5	1498.5	1503.3	1498.5
152.5°	1530.2	1539.5	1547.0	1552.9	1547.0
155°	1577.2	1581.5	1586.3	1593.9	1589.0
157.5°	1617.6	1620.9	1623.5	1634.4	1626.8
160°	1653.8	1657.0	1658.6	1667.7	1661.3
162.5°	1687.2	1687.2	1688.8	1699.0	1691.5
165°	1715.7	1714.1	1714.1	1724.9	1717.4
167.5°	1741.6	1736.8	1736.8	1747.6	1740.0
170°	1761.0	1756.7	1755.1	1765.9	1756.7
172.5°	1774.5	1770.2	1768.6	1779.3	1770.2
175°	1785.3	1781.0	1777.7	1788.6	1779.3
177.5°	1791.2	1787.0	1783.7	1792.8	1783.7
180°	1788.6	1788.6	1788.6	1788.6	1788.6



TEST NUMBER: P903440
 CATALOG NUMBER: DFN2DIP-PN4F0-120D060US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.94	14.00	13.71	14.80	15.77	12.50	13.56	13.27	14.36	15.33
	3H	14.61	15.57	15.40	16.38	17.37	14.13	15.09	14.92	15.89	16.89
	4H	15.21	16.12	16.02	16.93	17.94	14.73	15.63	15.53	16.44	17.45
	6H	15.63	16.46	16.44	17.28	18.30	15.13	15.97	15.95	16.79	17.81
	8H	15.74	16.53	16.56	17.37	18.40	15.24	16.04	16.07	16.88	17.90
	12H	15.79	16.55	16.63	17.39	18.44	15.29	16.05	16.13	16.89	17.94
4H	2H	13.42	14.32	14.23	15.14	16.15	13.07	13.97	13.88	14.79	15.80
	3H	15.31	16.06	16.13	16.91	17.94	14.91	15.66	15.73	16.51	17.53
	4H	16.03	16.72	16.87	17.57	18.62	15.62	16.30	16.45	17.15	18.20
	6H	16.56	17.16	17.41	18.03	19.09	16.14	16.73	16.99	17.60	18.66
	8H	16.72	17.27	17.57	18.14	19.21	16.29	16.85	17.14	17.71	18.78
	12H	16.80	17.30	17.68	18.19	19.27	16.36	16.86	17.24	17.75	18.83
8H	4H	16.25	16.80	17.10	17.67	18.74	15.88	16.43	16.73	17.30	18.37
	6H	16.89	17.35	17.77	18.26	19.33	16.51	16.97	17.40	17.88	18.95
	8H	17.11	17.52	18.01	18.42	19.51	16.73	17.14	17.62	18.04	19.13
	12H	17.26	17.62	18.15	18.51	19.65	16.86	17.22	17.75	18.11	19.25
12H	4H	16.24	16.74	17.12	17.63	18.71	15.88	16.38	16.75	17.27	18.34
	6H	16.92	17.33	17.81	18.23	19.32	16.56	16.97	17.45	17.87	18.96
	8H	17.18	17.54	18.07	18.43	19.57	16.80	17.16	17.70	18.06	19.20