

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905907

Luminaire Tested: DFN2DIP-PN4F0-040D120US835-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905907
REPORT IS A COMBINATION OF REPORTS P901274 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-040D120US835-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15280.0 lumens
Efficiency: N/A
Efficacy: 111.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 136.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905907

CATALOG NUMBER: DFN2DIP-PN4F0-040D120US835-RLLONL

Luminous Intensity Polar Plot

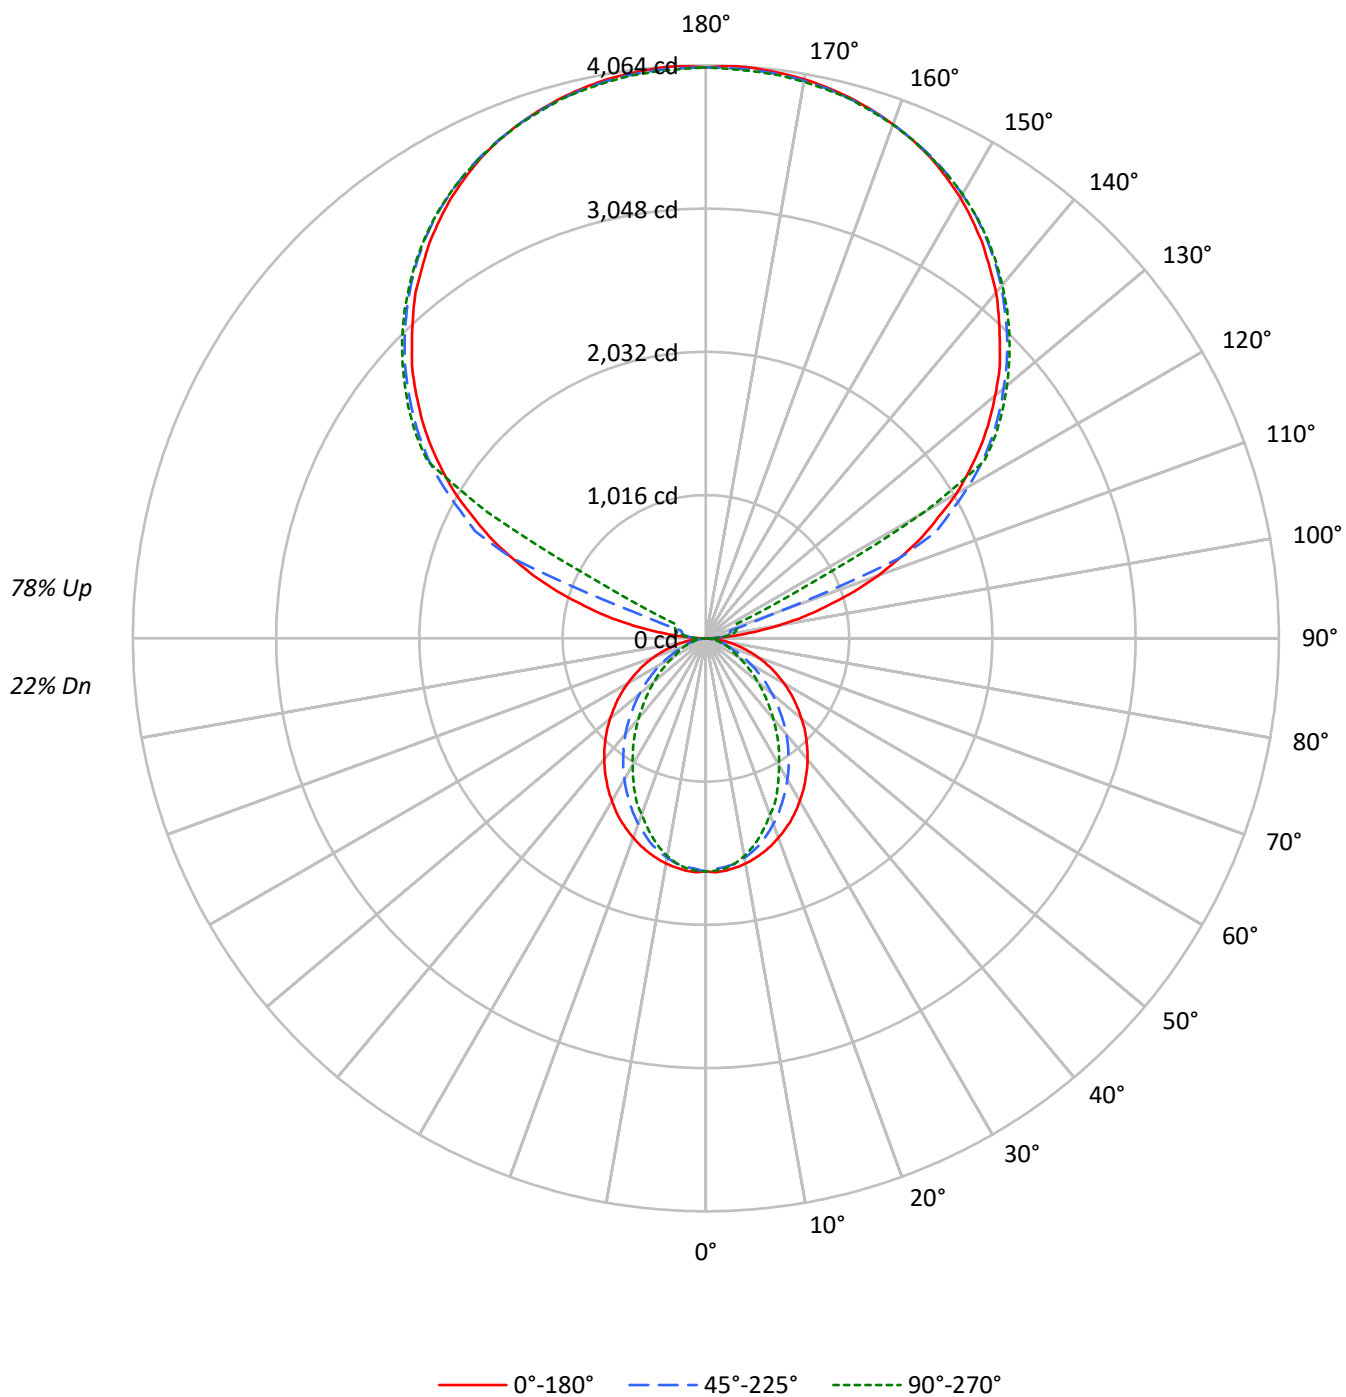

TEST NUMBER: P905907

CATALOG NUMBER: DFN2DIP-PN4F0-040D120US835-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	101	101	101	101	89	89	89	89	68	68	68	49	49	49	31	31	31
1	92	88	84	81	81	78	75	72	60	58	56	43	42	41	27	27	26
2	84	77	71	66	74	68	64	60	52	49	47	38	36	34	24	23	22
3	76	68	61	55	68	60	55	50	46	43	39	34	31	29	22	20	19
4	70	60	52	47	62	53	47	42	41	37	34	30	27	25	20	18	17
5	64	53	46	40	57	48	41	36	37	32	29	27	24	22	18	16	15
6	59	48	40	35	52	43	36	31	33	29	25	24	21	19	16	14	13
7	54	43	35	30	48	38	32	27	30	25	22	22	19	17	15	13	12
8	50	39	32	27	45	35	29	24	27	23	20	20	17	15	14	12	10
9	47	35	28	23	42	32	26	21	25	20	17	19	16	13	12	11	9
10	44	32	25	21	39	29	23	19	23	19	16	17	14	12	12	10	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1207	1207	1207
5°	1209	1188	1195
10°	1197	1165	1157
15°	1180	1126	1097
20°	1158	1073	1023
25°	1136	1014	952
30°	1106	953	862
35°	1077	888	783
40°	1047	820	692
45°	1012	745	609
50°	976	669	529
55°	939	588	451
60°	895	503	372
65°	846	417	335
70°	785	336	303
75°	709	297	276
80°	599	249	241
85°	417	167	182

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2160 cd/sqm

TEST NUMBER: P905907

CATALOG NUMBER: DFN2DIP-PN4F0-040D120US835-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	154.9	1.0
10°-20°	425.3	2.8
20°-30°	597.2	3.9
30°-40°	650.9	4.3
40°-50°	598.3	3.9
50°-60°	469.9	3.1
60°-70°	305.8	2.0
70°-80°	157.4	1.0
80°-90°	47.3	0.3
90°-100°	133.5	0.9
100°-110°	497.8	3.3
110°-120°	1320.3	8.6
120°-130°	2189.8	14.3
130°-140°	2326.1	15.2
140°-150°	2161.8	14.1
150°-160°	1738.1	11.4
160°-170°	1119.9	7.3
170°-180°	385.5	2.5
0°-30°	1177.4	7.7
0°-40°	1828.4	12.0
0°-60°	2896.5	19.0
0°-90°	3407.1	22.3
90°-120°	1951.7	12.8
90°-150°	8629.4	56.5
90°-180°	11873.0	77.7
0°-180°	15280.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1653	1653	1653	1653	1653	
5°	1653	1646	1626	1640	1635	157
15°	1572	1556	1505	1477	1462	443
25°	1427	1379	1281	1219	1197	656
35°	1230	1154	1022	928	895	770
45°	1005	905	748	642	606	776
55°	764	648	486	396	368	683
65°	516	395	260	210	205	512
75°	275	170	120	109	108	291
85°	64	33	28	28	28	74
90°	3	35	58	73	79	14
95°	190	94	114	129	126	225
105°	891	979	179	211	223	952
115°	1685	1735	1808	451	240	1659
125°	2382	2421	2476	2497	2506	2125
135°	2948	2995	3021	3051	3045	2277
145°	3420	3417	3467	3487	3472	2139
155°	3766	3739	3775	3792	3769	1735
165°	3968	3950	3959	3980	3959	1121
175°	4058	4038	4044	4064	4035	386
180°	4050	4050	4050	4050	4050	

TEST NUMBER: P905907

CATALOG NUMBER: DFN2DIP-PN4F0-040D120US835-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1653.2	1653.2	1653.2	1653.2	1653.2
2.5°	1660.7	1653.2	1636.7	1651.8	1648.7
5°	1653.2	1645.7	1626.2	1639.7	1635.3
7.5°	1639.7	1630.8	1609.9	1615.7	1608.3
10°	1621.8	1611.3	1581.4	1576.8	1568.0
12.5°	1599.4	1585.9	1545.4	1536.5	1520.0
15°	1572.4	1555.9	1505.1	1476.7	1461.8
17.5°	1541.0	1517.0	1454.1	1421.3	1397.3
20°	1505.1	1475.1	1400.3	1363.0	1330.0
22.5°	1466.2	1431.8	1344.9	1294.1	1271.8
25°	1427.3	1379.4	1280.6	1219.4	1196.8
27.5°	1381.0	1330.0	1220.8	1150.5	1116.0
30°	1331.6	1274.6	1154.9	1078.7	1038.3
32.5°	1283.7	1214.8	1092.2	1002.4	964.9
35°	1229.9	1153.5	1021.9	927.6	894.6
37.5°	1177.5	1095.1	956.0	852.7	815.4
40°	1122.1	1032.4	887.2	781.0	742.1
42.5°	1065.2	969.5	818.4	707.6	670.3
45°	1005.4	905.1	748.1	641.8	605.9
47.5°	948.6	842.4	680.8	574.5	541.6
50°	885.7	779.5	614.9	511.6	480.3
52.5°	824.3	712.1	552.1	453.3	424.9
55°	764.5	647.8	486.2	396.5	368.1
57.5°	703.2	583.5	427.9	344.1	320.2
60°	640.3	520.6	366.5	290.3	266.4
62.5°	579.1	459.4	314.1	242.4	230.5
65°	516.2	394.9	260.3	209.5	204.9
67.5°	456.4	335.1	209.5	184.0	179.5
70°	393.5	276.8	173.5	158.6	152.5
72.5°	333.7	222.9	145.1	133.2	130.2
75°	275.2	170.5	119.7	109.2	107.8
77.5°	217.0	121.1	94.3	88.3	85.2
80°	163.0	86.8	71.7	65.9	65.9
82.5°	113.7	58.4	49.4	46.3	46.3
85°	64.3	32.9	28.4	28.4	28.4
87.5°	24.0	11.9	11.9	10.5	10.5
90°	2.8	35.1	58.5	73.4	79.0
92.5°	73.4	61.6	70.3	76.2	79.0
95°	190.3	93.6	114.1	129.1	126.0
97.5°	342.8	102.7	149.3	158.3	161.1
100°	518.8	117.3	167.0	190.3	196.3
102.5°	712.0	706.4	172.9	205.0	214.0
105°	890.8	978.9	178.9	210.9	222.7
107.5°	1098.9	1172.0	184.8	216.8	228.6
110°	1298.3	1359.6	512.9	219.9	231.4

TEST NUMBER: P905907

CATALOG NUMBER: DFN2DIP-PN4F0-040D120US835-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1485.9	1538.4	1488.7	225.5	234.5
115°	1684.9	1734.7	1808.1	451.3	240.5
117.5°	1857.9	1916.4	1966.5	1547.1	779.5
120°	2051.4	2095.2	2148.1	2183.3	1787.6
122.5°	2215.3	2262.3	2321.1	2338.5	2341.6
125°	2382.3	2420.6	2476.3	2496.8	2505.5
127.5°	2534.7	2575.8	2620.0	2649.2	2652.0
130°	2678.4	2725.4	2757.4	2789.8	2787.0
132.5°	2824.9	2863.2	2895.2	2921.7	2918.9
135°	2948.1	2995.1	3021.2	3050.8	3044.9
137.5°	3076.9	3112.0	3141.6	3170.8	3162.1
140°	3202.9	3226.5	3258.5	3285.0	3270.4
142.5°	3308.6	3329.2	3367.1	3390.4	3375.8
145°	3420.0	3416.9	3466.6	3487.2	3472.5
147.5°	3516.4	3507.7	3557.5	3572.1	3560.6
150°	3610.3	3589.8	3636.8	3654.2	3639.6
152.5°	3689.3	3666.0	3709.9	3727.6	3707.1
155°	3765.5	3739.4	3774.6	3792.0	3768.7
157.5°	3827.1	3803.8	3830.3	3850.8	3827.1
160°	3880.0	3862.3	3880.0	3897.4	3876.9
162.5°	3926.7	3909.3	3923.9	3944.4	3918.0
165°	3967.7	3950.3	3959.0	3979.6	3959.0
167.5°	4000.1	3982.3	3991.4	4011.9	3985.5
170°	4026.5	4008.8	4014.7	4035.2	4008.8
172.5°	4043.9	4026.5	4032.5	4053.0	4026.5
175°	4058.5	4038.0	4043.9	4064.5	4035.2
177.5°	4064.5	4043.9	4047.1	4067.6	4041.2
180°	4049.9	4049.9	4049.9	4049.9	4049.9

TEST NUMBER: P905907

CATALOG NUMBER: DFN2DIP-PN4F0-040D120US835-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.38	5.03	5.55	6.18	7.80	0.35	0.99	1.51	2.14	3.76
	3H	6.05	6.62	7.22	7.78	9.42	1.52	2.10	2.70	3.26	4.89
	4H	6.65	7.20	7.83	8.36	9.99	1.96	2.51	3.15	3.67	5.31
	6H	7.06	7.57	8.25	8.73	10.38	2.28	2.78	3.47	3.94	5.59
	8H	7.19	7.67	8.38	8.84	10.48	2.36	2.84	3.55	4.02	5.66
	12H	7.24	7.70	8.44	8.87	10.53	2.40	2.85	3.59	4.02	5.69
4H	2H	4.38	4.93	5.57	6.08	7.72	0.92	1.47	2.11	2.63	4.27
	3H	6.19	6.65	7.39	7.83	9.48	2.25	2.71	3.45	3.89	5.54
	4H	6.88	7.30	8.07	8.47	10.14	2.80	3.22	3.99	4.39	6.06
	6H	7.39	7.75	8.59	8.94	10.60	3.21	3.57	4.41	4.76	6.42
	8H	7.56	7.90	8.76	9.08	10.76	3.33	3.67	4.53	4.85	6.53
	12H	7.65	7.95	8.86	9.15	10.83	3.39	3.69	4.60	4.89	6.57
8H	4H	6.83	7.17	8.03	8.35	10.03	3.06	3.40	4.26	4.58	6.26
	6H	7.40	7.67	8.61	8.90	10.57	3.58	3.85	4.79	5.08	6.75
	8H	7.61	7.85	8.84	9.06	10.75	3.77	4.01	4.99	5.21	6.90
	12H	7.75	7.96	8.97	9.16	10.88	3.88	4.09	5.10	5.29	7.01
12H	4H	6.78	7.08	7.99	8.28	9.96	3.06	3.37	4.27	4.56	6.24
	6H	7.37	7.61	8.59	8.81	10.51	3.63	3.87	4.85	5.07	6.76
	8H	7.59	7.80	8.81	9.00	10.72	3.83	4.04	5.05	5.24	6.96