

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905929

Luminaire Tested: DFN2DIP-PN4F0-050D090US835-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905929
REPORT IS A COMBINATION OF REPORTS P901221 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-050D090US835-FLLONL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 13860.0 lumens
Efficiency: N/A
Efficacy: 125.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 110.7
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905929
CATALOG NUMBER: DFN2DIP-PN4F0-050D090US835-FLLONL

Luminous Intensity Polar Plot

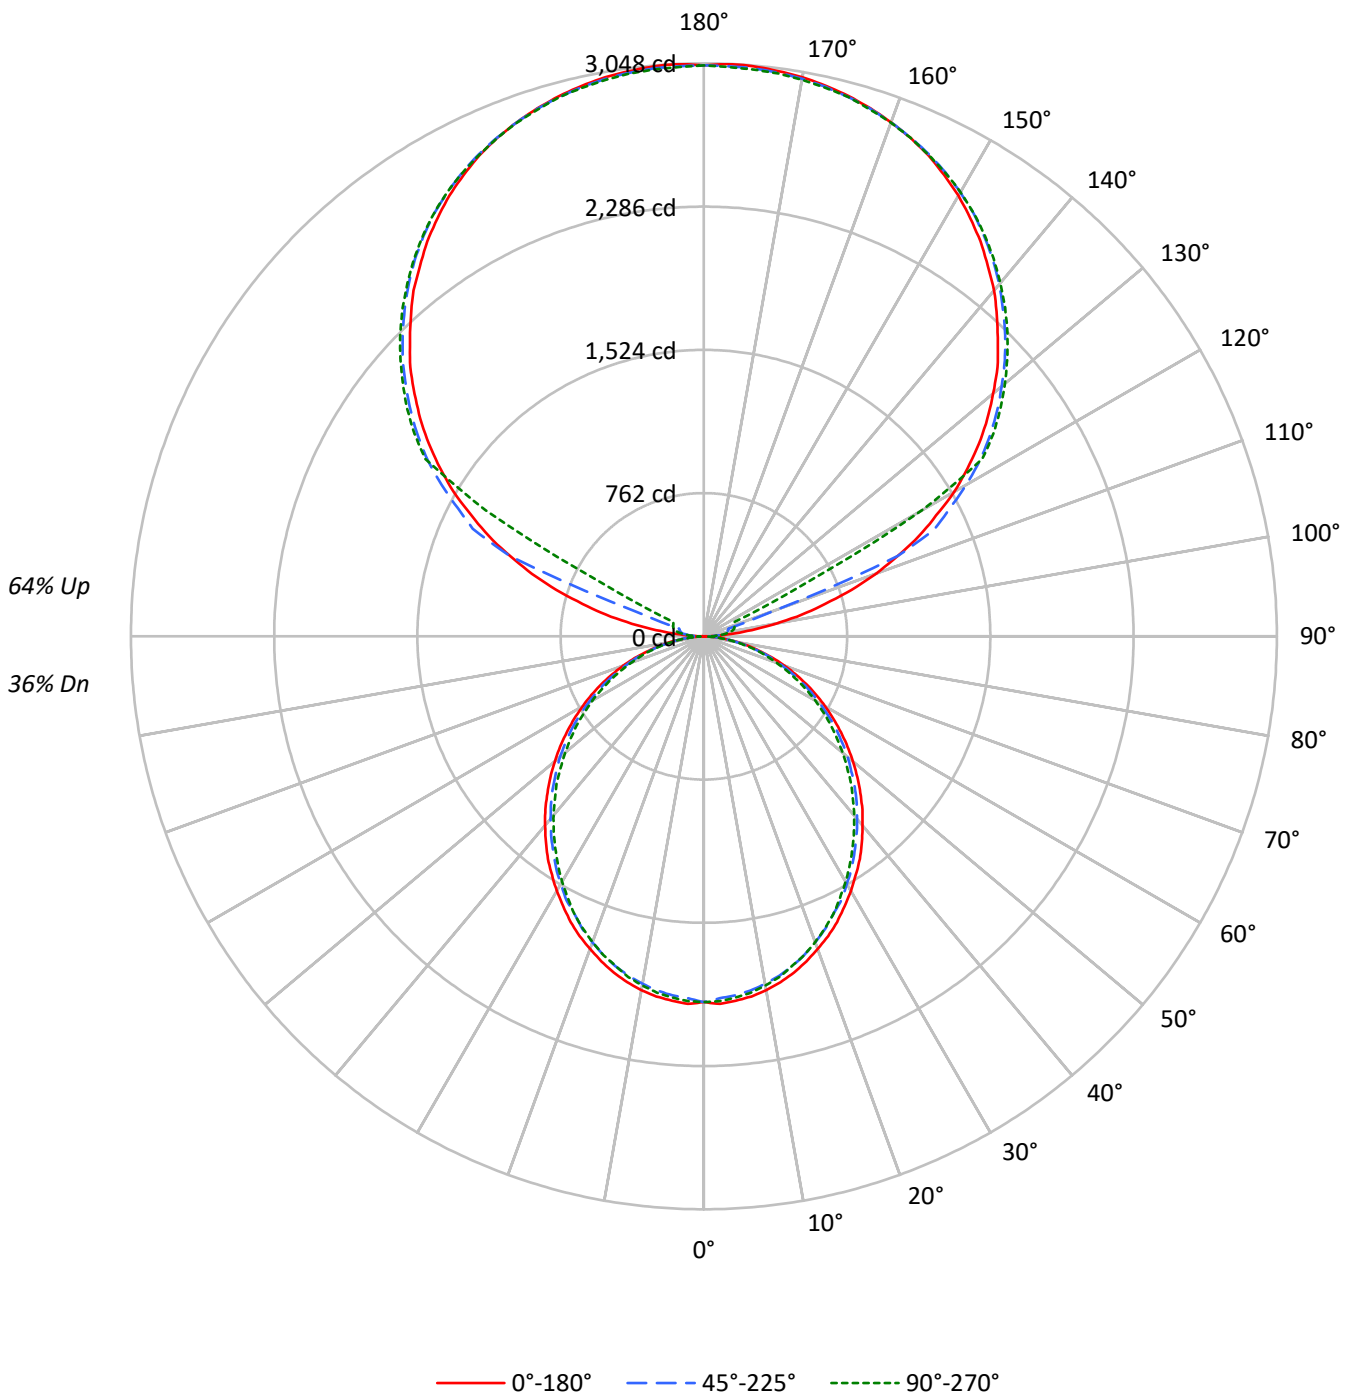



TEST NUMBER: P905929

CATALOG NUMBER: DFN2DIP-PN4F0-050D090US835-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	75	75	75	59	59	59	43	43	43	36				36
1	95	90	87	83	85	82	79	76	66	64	62	51	50	49	38	37	36	30				30
2	86	79	73	68	78	72	66	62	58	54	51	45	43	41	33	32	31	25				25
3	79	69	62	56	71	63	57	52	51	47	43	40	37	34	30	28	26	21				21
4	72	61	54	48	65	56	49	44	45	40	37	36	32	29	26	24	22	18				18
5	66	54	47	41	59	50	43	38	40	35	31	32	28	25	24	21	19	16				16
6	61	49	41	35	55	44	38	33	36	31	27	29	25	22	22	19	17	14				14
7	56	44	36	31	50	40	33	28	33	28	24	26	22	20	20	17	15	12				12
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	16	14	11				11
9	48	36	29	24	44	33	27	22	27	22	19	22	18	16	17	14	12	10				10
10	45	33	26	21	41	30	24	20	25	20	17	20	17	14	15	13	11	9				9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1420	1420	1420
5°	1422	1401	1410
10°	1411	1382	1391
15°	1390	1359	1362
20°	1362	1328	1331
25°	1334	1290	1296
30°	1299	1255	1252
35°	1266	1214	1204
40°	1225	1172	1160
45°	1185	1131	1114
50°	1140	1087	1060
55°	1094	1036	1011
60°	1041	976	956
65°	984	913	889
70°	911	837	819
75°	809	747	754
80°	688	631	628
85°	497	430	420

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 1618 cd/sqm



TEST NUMBER: P905929

CATALOG NUMBER: DFN2DIP-PN4F0-050D090US835-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	183.1	1.3
10°-20°	515.2	3.7
20°-30°	757.2	5.5
30°-40°	879.4	6.3
40°-50°	878.3	6.3
50°-60°	765.8	5.5
60°-70°	566.1	4.1
70°-80°	320.3	2.3
80°-90°	89.9	0.6
90°-100°	100.2	0.7
100°-110°	373.4	2.7
110°-120°	990.2	7.1
120°-130°	1642.4	11.8
130°-140°	1744.6	12.6
140°-150°	1621.4	11.7
150°-160°	1303.5	9.4
160°-170°	840.0	6.1
170°-180°	289.1	2.1
0°-30°	1455.5	10.5
0°-40°	2334.9	16.8
0°-60°	3979.0	28.7
0°-90°	4955.3	35.8
90°-120°	1463.7	10.6
90°-150°	6472.0	46.7
90°-180°	8905.0	64.2
0°-180°	13860.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1946	1946	1946	1946	1946	
5°	1946	1938	1918	1932	1929	185
15°	1852	1841	1816	1824	1815	522
25°	1676	1661	1630	1633	1630	771
35°	1446	1428	1398	1386	1377	903
45°	1177	1164	1136	1115	1108	908
55°	891	879	857	834	825	796
65°	601	589	571	554	544	594
75°	314	311	301	290	294	335
85°	77	75	73	67	66	85
90°	2	26	44	55	59	13
95°	143	70	86	97	94	169
105°	668	734	134	158	167	714
115°	1264	1301	1356	338	180	1244
125°	1787	1815	1857	1873	1879	1594
135°	2211	2246	2266	2288	2284	1708
145°	2565	2563	2600	2615	2604	1604
155°	2824	2805	2831	2844	2826	1301
165°	2976	2963	2969	2985	2969	841
175°	3044	3028	3033	3048	3026	290
180°	3037	3037	3037	3037	3037	



TEST NUMBER: P905929

CATALOG NUMBER: DFN2DIP-PN4F0-050D090US835-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1945.5	1945.5	1945.5	1945.5	1945.5
2.5°	1956.8	1947.5	1926.9	1945.5	1942.0
5°	1945.5	1938.2	1917.5	1932.4	1928.9
7.5°	1932.4	1921.3	1900.7	1915.8	1912.0
10°	1912.0	1898.9	1876.5	1891.3	1885.8
12.5°	1883.8	1872.7	1850.3	1859.6	1855.8
15°	1852.0	1840.9	1816.5	1824.1	1814.7
17.5°	1812.7	1801.6	1777.2	1786.5	1777.2
20°	1769.7	1758.6	1732.4	1737.9	1730.6
22.5°	1726.8	1709.9	1685.5	1685.5	1681.7
25°	1676.2	1661.3	1629.5	1633.1	1629.5
27.5°	1620.0	1606.9	1582.7	1577.1	1567.8
30°	1564.0	1549.0	1521.0	1515.4	1507.9
32.5°	1504.1	1493.0	1463.0	1451.7	1444.2
35°	1446.1	1427.5	1397.5	1386.2	1376.9
37.5°	1380.6	1363.8	1333.8	1320.7	1311.4
40°	1313.4	1298.3	1268.3	1251.6	1244.1
42.5°	1247.9	1232.8	1203.0	1184.1	1173.0
45°	1176.8	1163.7	1135.5	1115.1	1107.5
47.5°	1107.5	1094.4	1064.5	1043.8	1032.7
50°	1034.5	1025.2	999.0	972.8	963.4
52.5°	963.4	950.3	926.1	905.5	892.4
55°	890.6	879.3	856.8	834.4	825.1
57.5°	817.5	808.2	783.8	761.4	753.8
60°	744.5	737.2	711.0	690.3	684.8
62.5°	673.5	660.4	641.7	623.0	615.5
65°	600.6	589.3	570.6	553.8	544.4
67.5°	525.8	516.3	499.6	486.5	478.9
70°	456.5	449.0	432.1	419.0	411.7
72.5°	385.5	377.9	368.6	355.5	349.9
75°	314.2	310.6	301.1	290.0	293.8
77.5°	250.7	243.1	239.4	233.8	228.3
80°	187.2	185.2	181.4	175.9	172.1
82.5°	127.2	127.2	125.4	117.9	117.9
85°	76.6	74.8	73.0	67.3	65.5
87.5°	33.7	30.0	26.2	20.6	18.7
90°	2.1	26.4	43.8	55.1	59.2
92.5°	55.1	46.2	52.7	57.2	59.2
95°	142.8	70.2	85.6	96.8	94.5
97.5°	257.1	77.0	112.0	118.7	120.8
100°	389.1	88.0	125.3	142.8	147.2
102.5°	534.0	529.8	129.7	153.7	160.5
105°	668.1	734.2	134.1	158.2	167.0
107.5°	824.2	879.0	138.6	162.6	171.5
110°	973.7	1019.7	384.7	164.9	173.6



TEST NUMBER: P905929

CATALOG NUMBER: DFN2DIP-PN4F0-050D090US835-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1114.4	1153.8	1116.5	169.1	175.9
115°	1263.7	1301.0	1356.1	338.5	180.3
117.5°	1393.4	1437.3	1474.8	1160.4	584.6
120°	1538.5	1571.4	1611.1	1637.4	1340.7
122.5°	1661.5	1696.7	1740.8	1753.8	1756.2
125°	1786.7	1815.4	1857.2	1872.6	1879.1
127.5°	1901.0	1931.8	1965.0	1986.9	1989.0
130°	2008.8	2044.1	2068.1	2092.3	2090.3
132.5°	2118.7	2147.4	2171.4	2191.3	2189.2
135°	2211.1	2246.3	2265.9	2288.1	2283.7
137.5°	2307.7	2334.0	2356.2	2378.1	2371.6
140°	2402.1	2419.9	2443.9	2463.7	2452.8
142.5°	2481.5	2496.9	2525.3	2542.8	2531.9
145°	2565.0	2562.6	2600.0	2615.4	2604.4
147.5°	2637.3	2630.8	2668.1	2679.1	2670.4
150°	2707.8	2692.4	2727.6	2740.6	2729.7
152.5°	2767.0	2749.5	2782.4	2795.7	2780.3
155°	2824.2	2804.6	2830.9	2844.0	2826.5
157.5°	2870.4	2852.9	2872.7	2888.1	2870.4
160°	2910.0	2896.7	2910.0	2923.1	2907.7
162.5°	2945.0	2931.9	2942.9	2958.3	2938.5
165°	2975.8	2962.7	2969.3	2984.7	2969.3
167.5°	3000.1	2986.8	2993.5	3008.9	2989.1
170°	3019.9	3006.6	3011.0	3026.4	3006.6
172.5°	3033.0	3019.9	3024.3	3039.7	3019.9
175°	3043.9	3028.5	3033.0	3048.3	3026.4
177.5°	3048.3	3033.0	3035.3	3050.7	3030.9
180°	3037.4	3037.4	3037.4	3037.4	3037.4



TEST NUMBER: P905929
 CATALOG NUMBER: DFN2DIP-PN4F0-050D090US835-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.01	7.76	8.08	8.83	10.29	6.57	7.32	7.65	8.39	9.85
	3H	8.67	9.34	9.75	10.42	11.90	8.18	8.85	9.26	9.93	11.41
	4H	9.25	9.89	10.34	10.97	12.46	8.77	9.40	9.86	10.48	11.97
	6H	9.65	10.23	10.75	11.32	12.82	9.16	9.74	10.26	10.83	12.32
	8H	9.75	10.31	10.86	11.41	12.90	9.26	9.82	10.36	10.92	12.41
	12H	9.80	10.33	10.91	11.42	12.94	9.30	9.83	10.41	10.92	12.44
4H	2H	7.46	8.10	8.56	9.18	10.66	7.11	7.75	8.21	8.83	10.31
	3H	9.32	9.85	10.43	10.96	12.46	8.92	9.45	10.02	10.56	12.05
	4H	10.03	10.52	11.14	11.62	13.14	9.61	10.10	10.72	11.20	12.72
	6H	10.54	10.96	11.66	12.08	13.59	10.12	10.54	11.24	11.66	13.17
	8H	10.69	11.08	11.81	12.20	13.72	10.26	10.65	11.38	11.77	13.29
	12H	10.76	11.11	11.89	12.24	13.77	10.32	10.67	11.45	11.80	13.33
8H	4H	10.22	10.61	11.34	11.72	13.25	9.85	10.24	10.97	11.35	12.88
	6H	10.85	11.17	11.99	12.33	13.85	10.47	10.80	11.61	11.95	13.48
	8H	11.07	11.35	12.22	12.49	14.03	10.69	10.97	11.83	12.10	13.65
	12H	11.20	11.45	12.35	12.58	14.16	10.80	11.05	11.95	12.18	13.76
12H	4H	10.20	10.55	11.33	11.68	13.21	9.84	10.19	10.97	11.32	12.85
	6H	10.88	11.16	12.02	12.30	13.84	10.51	10.80	11.66	11.93	13.48
	8H	11.12	11.36	12.27	12.50	14.08	10.75	10.99	11.89	12.13	13.71