

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905959

Luminaire Tested: DFN2DIP-PN4F0-060D070US835-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905959
REPORT IS A COMBINATION OF REPORTS P901188 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-060D070US835-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12030.0 lumens
Efficiency: N/A
Efficacy: 112.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 107.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905959

CATALOG NUMBER: DFN2DIP-PN4F0-060D070US835-RLLONL

Luminous Intensity Polar Plot

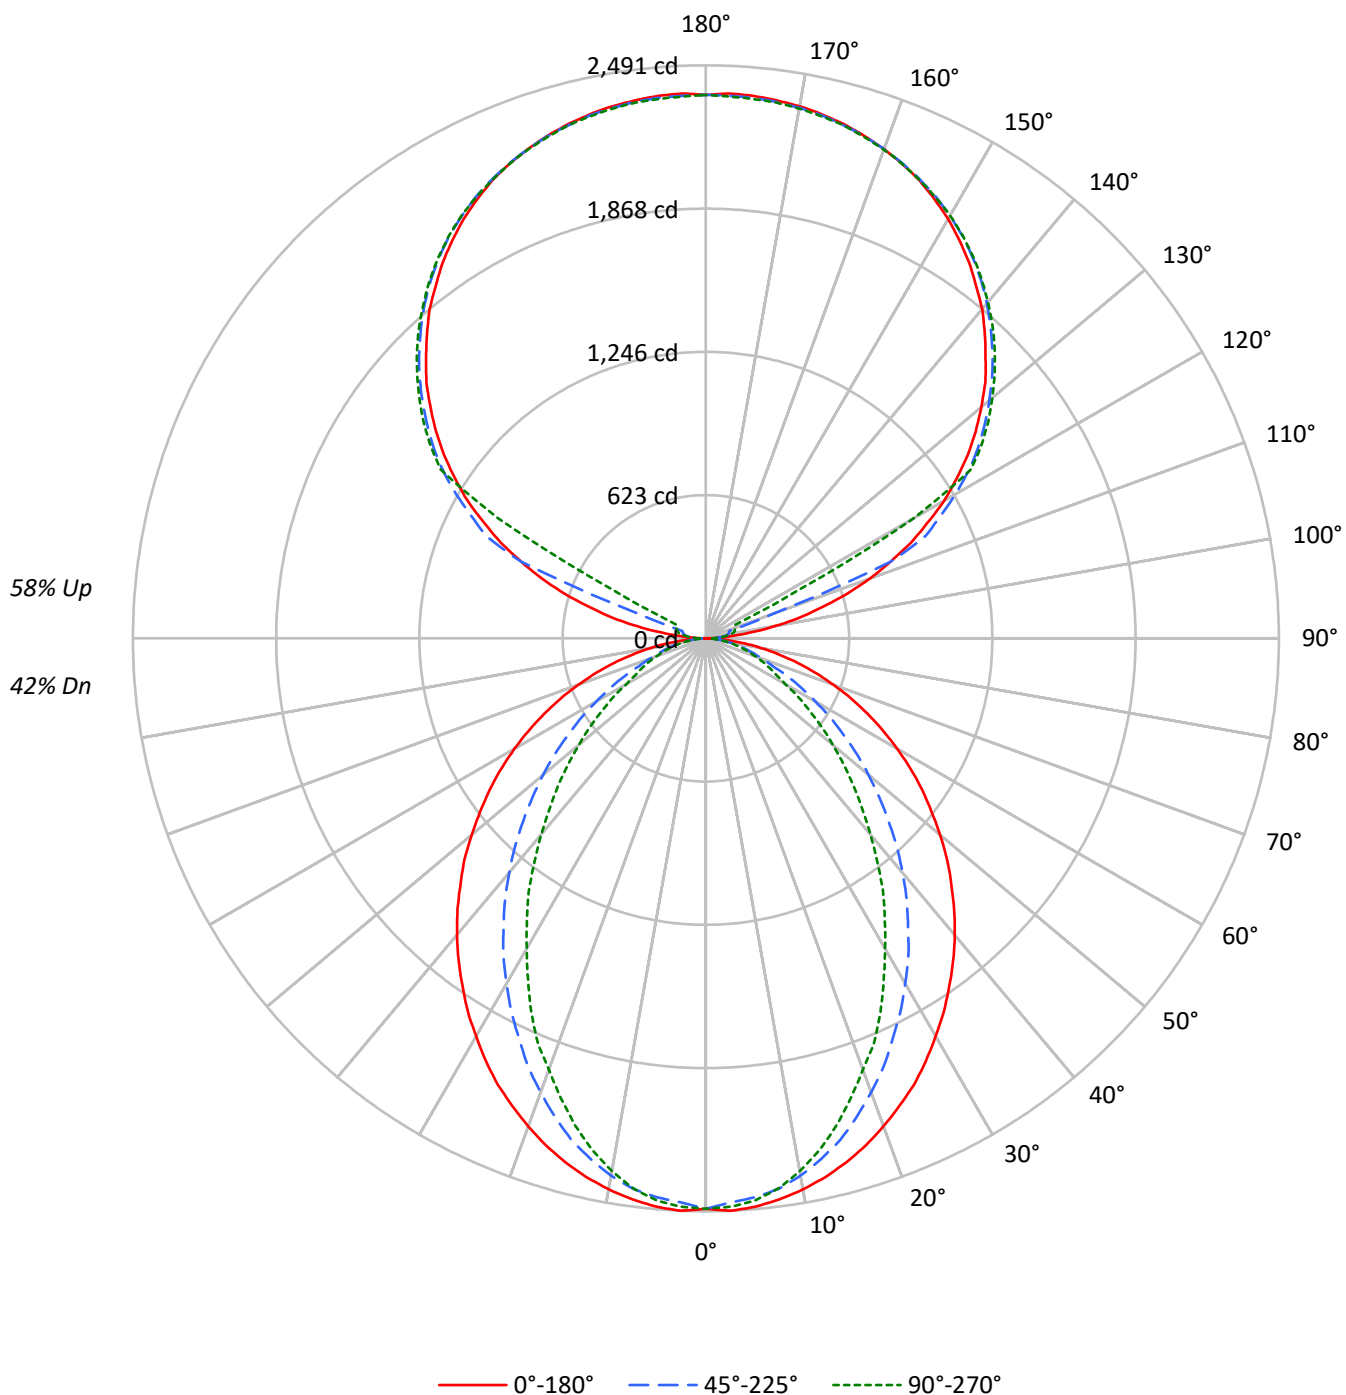

TEST NUMBER: P905959

CATALOG NUMBER: DFN2DIP-PN4F0-060D070US835-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49
1	96	92	89	85	88	85	81	79	70	68	66	56	55	54	44	43	42
2	88	81	75	70	80	74	69	65	62	58	55	50	48	45	39	38	36
3	81	72	65	59	74	66	60	55	55	50	47	45	42	39	35	33	31
4	74	64	56	50	67	59	52	47	49	44	40	40	36	34	32	29	27
5	68	57	49	43	62	52	46	40	44	39	35	36	32	29	29	26	24
6	63	51	43	38	57	47	40	35	40	34	31	33	29	26	26	23	21
7	58	46	39	33	53	43	36	31	36	31	27	30	26	23	24	21	19
8	54	42	35	29	49	39	32	28	33	28	24	27	24	21	22	19	17
9	50	38	31	26	46	36	29	25	30	25	22	25	21	19	21	18	16
10	47	35	28	24	43	33	26	22	28	23	20	23	20	17	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1810	1810	1810
5°	1813	1782	1793
10°	1795	1747	1735
15°	1770	1689	1645
20°	1738	1610	1535
25°	1704	1521	1428
30°	1659	1430	1293
35°	1615	1332	1174
40°	1570	1230	1037
45°	1518	1117	914
50°	1464	1003	793
55°	1408	882	677
60°	1343	755	557
65°	1268	625	502
70°	1177	504	455
75°	1064	445	415
80°	898	374	361
85°	626	251	273

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1518 cd/sqm

TEST NUMBER: P905959

CATALOG NUMBER: DFN2DIP-PN4F0-060D070US835-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.4	1.9
10°-20°	638.0	5.3
20°-30°	895.7	7.4
30°-40°	976.4	8.1
40°-50°	897.4	7.5
50°-60°	704.8	5.9
60°-70°	458.8	3.8
70°-80°	236.1	2.0
80°-90°	64.4	0.5
90°-100°	77.9	0.6
100°-110°	290.4	2.4
110°-120°	770.2	6.4
120°-130°	1277.4	10.6
130°-140°	1356.9	11.3
140°-150°	1261.1	10.5
150°-160°	1013.9	8.4
160°-170°	653.3	5.4
170°-180°	224.9	1.9
0°-30°	1766.2	14.7
0°-40°	2742.6	22.8
0°-60°	4344.8	36.1
0°-90°	5104.2	42.4
90°-120°	1138.5	9.5
90°-150°	5033.8	41.8
90°-180°	6926.0	57.6
0°-180°	12030.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2480	2480	2480	2480	2480	
5°	2480	2469	2439	2460	2453	235
15°	2359	2334	2258	2215	2193	665
25°	2141	2069	1921	1829	1795	985
35°	1845	1730	1533	1391	1342	1155
45°	1508	1358	1122	963	909	1165
55°	1147	972	729	595	552	1025
65°	774	592	390	314	307	768
75°	413	256	180	164	162	437
85°	96	49	43	43	43	111
90°	2	20	34	43	46	11
95°	111	55	67	75	74	131
105°	520	571	104	123	130	555
115°	983	1012	1055	263	140	968
125°	1390	1412	1444	1456	1462	1239
135°	1720	1747	1762	1780	1776	1328
145°	1995	1993	2022	2034	2026	1248
155°	2197	2181	2202	2212	2198	1012
165°	2314	2304	2309	2321	2309	654
175°	2368	2356	2359	2371	2354	225
180°	2362	2362	2362	2362	2362	

TEST NUMBER: P905959

CATALOG NUMBER: DFN2DIP-PN4F0-060D070US835-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2479.8	2479.8	2479.8	2479.8	2479.8
2.5°	2491.0	2479.8	2455.0	2477.6	2473.1
5°	2479.8	2468.6	2439.3	2459.6	2452.9
7.5°	2459.6	2446.2	2414.8	2423.6	2412.4
10°	2432.6	2416.9	2372.2	2365.3	2351.9
12.5°	2399.1	2378.8	2318.1	2304.8	2280.0
15°	2358.6	2333.8	2257.6	2215.0	2192.6
17.5°	2311.5	2275.5	2181.2	2131.9	2096.0
20°	2257.6	2212.6	2100.5	2044.5	1995.0
22.5°	2199.3	2147.6	2017.4	1941.2	1907.6
25°	2141.0	2069.1	1921.0	1829.1	1795.3
27.5°	2071.5	1995.0	1831.2	1725.7	1674.1
30°	1997.4	1911.9	1732.4	1618.1	1557.4
32.5°	1925.5	1822.2	1638.4	1503.6	1447.4
35°	1844.8	1730.3	1532.9	1391.4	1341.9
37.5°	1766.2	1642.6	1434.1	1279.1	1223.1
40°	1683.1	1548.6	1330.7	1171.4	1113.1
42.5°	1597.9	1454.3	1227.6	1061.4	1005.5
45°	1508.1	1357.6	1122.2	962.6	908.8
47.5°	1422.9	1263.6	1021.2	861.7	812.4
50°	1328.6	1169.3	922.4	767.4	720.5
52.5°	1236.4	1068.1	828.1	680.0	637.4
55°	1146.7	971.7	729.3	594.8	552.1
57.5°	1054.8	875.2	641.9	516.2	480.2
60°	960.5	781.0	549.8	435.5	399.5
62.5°	868.6	689.1	471.2	363.6	345.7
65°	774.3	592.4	390.5	314.3	307.4
67.5°	684.5	502.6	314.3	276.0	269.3
70°	590.2	415.2	260.2	237.9	228.8
72.5°	500.5	334.3	217.6	199.8	195.2
75°	412.9	255.7	179.5	163.8	161.7
77.5°	325.5	181.7	141.4	132.4	127.9
80°	244.5	130.2	107.6	98.8	98.8
82.5°	170.5	87.6	74.0	69.5	69.5
85°	96.4	49.3	42.6	42.6	42.6
87.5°	36.0	17.9	17.9	15.7	15.7
90°	1.6	20.5	34.1	42.8	46.1
92.5°	42.8	35.9	41.0	44.5	46.1
95°	111.0	54.6	66.6	75.3	73.5
97.5°	199.9	59.9	87.1	92.4	94.0
100°	302.7	68.4	97.4	111.0	114.5
102.5°	415.3	412.1	100.9	119.6	124.8
105°	519.7	571.0	104.3	123.0	129.9
107.5°	641.0	683.7	107.8	126.5	133.4
110°	757.4	793.1	299.2	128.3	135.0

TEST NUMBER: P905959

CATALOG NUMBER: DFN2DIP-PN4F0-060D070US835-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	866.8	897.4	868.4	131.5	136.8
115°	982.9	1011.9	1054.7	263.3	140.3
117.5°	1083.8	1117.9	1147.1	902.5	454.7
120°	1196.6	1222.2	1253.1	1273.6	1042.8
122.5°	1292.2	1319.6	1354.0	1364.1	1365.9
125°	1389.7	1412.0	1444.5	1456.5	1461.5
127.5°	1478.6	1502.5	1528.3	1545.4	1547.0
130°	1562.4	1589.8	1608.5	1627.4	1625.8
132.5°	1647.9	1670.2	1688.9	1704.3	1702.7
135°	1719.7	1747.1	1762.4	1779.6	1776.2
137.5°	1794.8	1815.4	1832.6	1849.7	1844.6
140°	1868.3	1882.1	1900.8	1916.2	1907.7
142.5°	1930.0	1942.0	1964.1	1977.7	1969.2
145°	1995.0	1993.2	2022.2	2034.2	2025.7
147.5°	2051.2	2046.2	2075.2	2083.7	2077.0
150°	2106.0	2094.1	2121.5	2131.6	2123.1
152.5°	2152.1	2138.5	2164.1	2174.4	2162.5
155°	2196.6	2181.3	2201.8	2212.0	2198.4
157.5°	2232.5	2218.9	2234.3	2246.3	2232.5
160°	2263.4	2253.0	2263.4	2273.5	2261.5
162.5°	2290.6	2280.4	2288.9	2300.9	2285.5
165°	2314.5	2304.4	2309.4	2321.4	2309.4
167.5°	2333.4	2323.0	2328.3	2340.3	2324.9
170°	2348.8	2338.5	2341.9	2353.9	2338.5
172.5°	2359.0	2348.8	2352.3	2364.2	2348.8
175°	2367.5	2355.5	2359.0	2370.9	2353.9
177.5°	2370.9	2359.0	2360.8	2372.8	2357.3
180°	2362.4	2362.4	2362.4	2362.4	2362.4

TEST NUMBER: P905959

CATALOG NUMBER: DFN2DIP-PN4F0-060D070US835-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.47	9.24	9.49	10.27	11.64	4.43	5.20	5.46	6.23	7.61
	3H	10.14	10.83	11.18	11.87	13.27	5.62	6.31	6.65	7.34	8.74
	4H	10.75	11.40	11.80	12.44	13.85	6.06	6.72	7.11	7.76	9.16
	6H	11.17	11.77	12.23	12.82	14.23	6.38	6.98	7.44	8.03	9.45
	8H	11.30	11.87	12.36	12.93	14.34	6.47	7.04	7.53	8.10	9.52
	12H	11.36	11.90	12.42	12.95	14.39	6.51	7.06	7.58	8.11	9.55
4H	2H	8.48	9.13	9.53	10.17	11.58	5.02	5.67	6.07	6.71	8.12
	3H	10.30	10.85	11.37	11.92	13.33	6.37	6.91	7.43	7.98	9.40
	4H	11.00	11.49	12.06	12.55	13.99	6.91	7.41	7.98	8.47	9.91
	6H	11.51	11.94	12.59	13.02	14.45	7.33	7.76	8.41	8.84	10.27
	8H	11.69	12.08	12.76	13.16	14.61	7.46	7.86	8.54	8.93	10.38
	12H	11.78	12.14	12.87	13.23	14.68	7.52	7.88	8.62	8.97	10.42
8H	4H	10.96	11.36	12.04	12.43	13.88	7.19	7.59	8.27	8.66	10.11
	6H	11.53	11.85	12.63	12.97	14.42	7.71	8.04	8.81	9.15	10.60
	8H	11.74	12.03	12.85	13.13	14.60	7.90	8.19	9.01	9.29	10.75
	12H	11.88	12.14	12.99	13.23	14.74	8.02	8.27	9.13	9.37	10.87
12H	4H	10.91	11.27	12.00	12.36	13.81	7.19	7.55	8.29	8.64	10.10
	6H	11.50	11.79	12.61	12.89	14.36	7.76	8.05	8.86	9.15	10.61
	8H	11.72	11.98	12.83	13.07	14.58	7.97	8.22	9.08	9.32	10.82