

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905987

Luminaire Tested: DFN2DIP-PN4F0-070D050US835-RLLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P905987  
REPORT IS A COMBINATION OF REPORTS P901154 AND P898053  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-PN4F0-070D050US835-RLONL  
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 10900.0 lumens  
Efficiency: N/A  
Efficacy: 104.5 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 104.3  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9789  
Total Harmonic Distortion (THDi): 0.074  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P905987  
CATALOG NUMBER: DFN2DIP-PN4F0-070D050US835-RLLONL

### Luminous Intensity Polar Plot

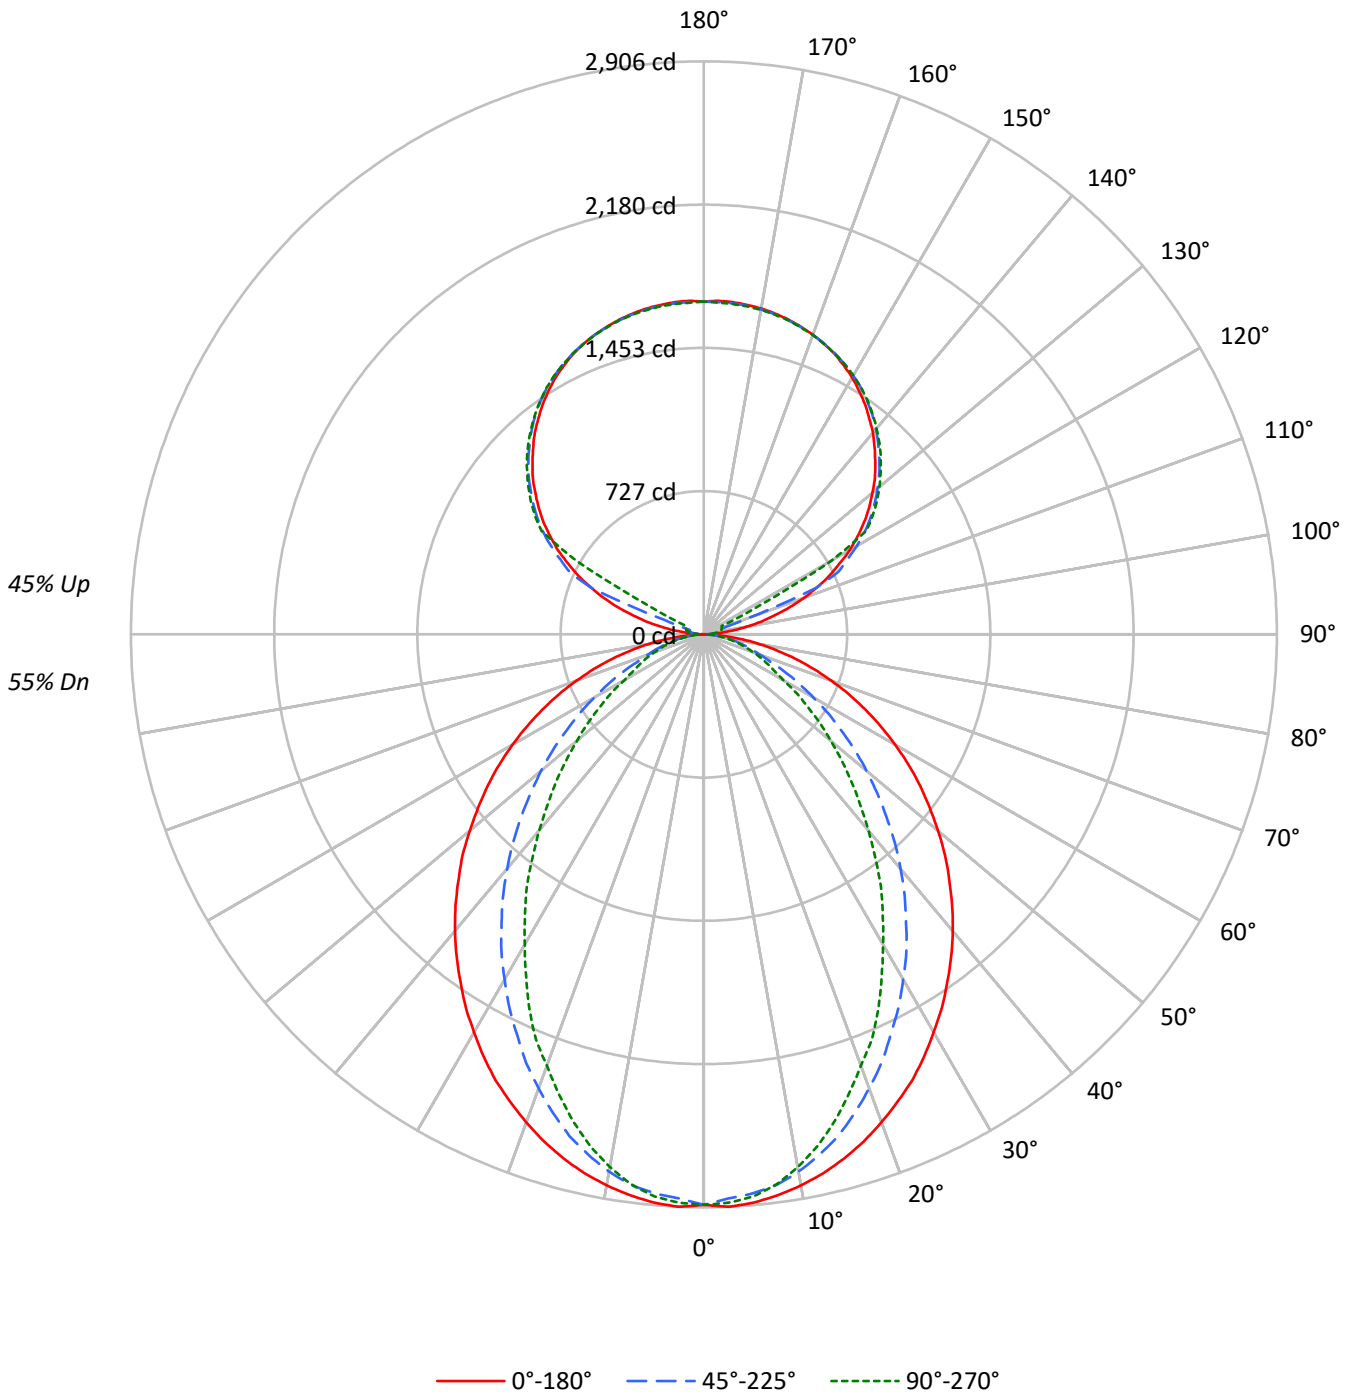



TEST NUMBER: P905987  
 CATALOG NUMBER: DFN2DIP-PN4F0-070D050US835-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	60	60	60	55
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	54	53	52	54	53	52	47
2	91	84	78	73	84	78	73	69	67	63	60	57	55	52	48	46	45	48	46	45	40
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	39	43	41	39	35
4	76	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34	39	36	34	30
5	70	59	51	45	65	55	48	43	48	43	38	42	37	34	35	32	30	35	32	30	27
6	65	53	45	40	60	50	43	38	44	38	34	38	33	30	32	29	26	32	29	26	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24	30	26	24	21
8	56	44	36	31	52	41	34	30	36	31	27	32	27	24	27	24	21	27	24	21	19
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	25	22	19	25	22	19	17
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	20	18	24	20	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2112	2112	2112
5°	2115	2079	2092
10°	2094	2038	2024
15°	2065	1971	1919
20°	2027	1878	1791
25°	1988	1775	1666
30°	1936	1668	1508
35°	1884	1554	1370
40°	1832	1435	1210
45°	1771	1303	1066
50°	1708	1171	925
55°	1643	1029	790
60°	1567	880	650
65°	1480	729	586
70°	1374	588	531
75°	1241	519	484
80°	1048	437	421
85°	730	293	319

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1771 cd/sqm



TEST NUMBER: P905987

CATALOG NUMBER: DFN2DIP-PN4F0-070D050US835-RLLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	271.1	2.5
10°-20°	744.3	6.8
20°-30°	1045.0	9.6
30°-40°	1139.2	10.5
40°-50°	1047.0	9.6
50°-60°	822.3	7.5
60°-70°	535.2	4.9
70°-80°	275.5	2.5
80°-90°	73.3	0.7
90°-100°	55.7	0.5
100°-110°	207.4	1.9
110°-120°	550.1	5.0
120°-130°	912.4	8.4
130°-140°	969.2	8.9
140°-150°	900.8	8.3
150°-160°	724.2	6.6
160°-170°	466.6	4.3
170°-180°	160.6	1.5
0°-30°	2060.5	18.9
0°-40°	3199.7	29.4
0°-60°	5068.9	46.5
0°-90°	5952.9	54.6
90°-120°	813.2	7.5
90°-150°	3595.6	33.0
90°-180°	4947.0	45.4
0°-180°	10900.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2893	2893	2893	2893	2893	
5°	2893	2880	2846	2870	2862	274
15°	2752	2723	2634	2584	2558	775
25°	2498	2414	2241	2134	2094	1149
35°	2152	2019	1788	1623	1566	1347
45°	1760	1584	1309	1123	1060	1359
55°	1338	1134	851	694	644	1195
65°	903	691	456	367	359	896
75°	482	298	209	191	189	509
85°	112	58	50	50	50	129
90°	1	15	24	31	33	10
95°	79	39	48	54	52	94
105°	371	408	74	88	93	397
115°	702	723	753	188	100	691
125°	993	1009	1032	1040	1044	885
135°	1228	1248	1259	1271	1269	949
145°	1425	1424	1444	1453	1447	891
155°	1569	1558	1573	1580	1570	723
165°	1653	1646	1650	1658	1650	467
175°	1691	1682	1685	1694	1681	161
180°	1687	1687	1687	1687	1687	



TEST NUMBER: P905987

CATALOG NUMBER: DFN2DIP-PN4F0-070D050US835-RLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2893.1	2893.1	2893.1	2893.1	2893.1
2.5°	2906.1	2893.1	2864.2	2890.6	2885.3
5°	2893.1	2880.0	2845.9	2869.5	2861.7
7.5°	2869.5	2853.9	2817.3	2827.5	2814.5
10°	2838.1	2819.8	2767.5	2759.5	2743.9
12.5°	2798.9	2775.3	2704.5	2688.9	2660.0
15°	2751.7	2722.8	2633.9	2584.2	2558.1
17.5°	2696.7	2654.8	2544.8	2487.2	2445.3
20°	2633.9	2581.4	2450.6	2385.3	2327.5
22.5°	2565.9	2505.6	2353.6	2264.7	2225.6
25°	2497.8	2413.9	2241.1	2133.9	2094.5
27.5°	2416.7	2327.5	2136.4	2013.4	1953.1
30°	2330.3	2230.6	2021.1	1887.8	1817.0
32.5°	2246.4	2125.9	1911.4	1754.2	1688.6
35°	2152.2	2018.6	1788.4	1623.4	1565.6
37.5°	2060.6	1916.4	1673.1	1492.2	1427.0
40°	1963.6	1806.7	1552.5	1366.7	1298.6
42.5°	1864.2	1696.7	1432.2	1238.3	1173.1
45°	1759.5	1583.9	1309.2	1123.1	1060.3
47.5°	1660.0	1474.2	1191.4	1005.3	947.8
50°	1550.0	1364.2	1076.1	895.3	840.6
52.5°	1442.5	1246.1	966.1	793.3	743.6
55°	1337.8	1133.6	850.8	693.9	644.2
57.5°	1230.6	1021.1	748.9	602.2	560.3
60°	1120.6	911.1	641.4	508.1	466.1
62.5°	1013.3	803.9	549.7	424.2	403.3
65°	903.3	691.1	455.6	366.7	358.6
67.5°	798.6	586.4	366.7	321.9	314.2
70°	688.6	484.4	303.6	277.5	266.9
72.5°	583.9	390.0	253.9	233.1	227.8
75°	481.7	298.3	209.4	191.1	188.6
77.5°	379.7	211.9	165.0	154.4	149.2
80°	285.3	151.9	125.6	115.3	115.3
82.5°	198.9	102.2	86.4	81.1	81.1
85°	112.5	57.5	49.7	49.7	49.7
87.5°	41.9	20.8	20.8	18.3	18.3
90°	1.2	14.6	24.4	30.6	32.9
92.5°	30.6	25.7	29.3	31.8	32.9
95°	79.3	39.0	47.6	53.8	52.5
97.5°	142.8	42.8	62.2	66.0	67.1
100°	216.2	48.9	69.6	79.3	81.8
102.5°	296.7	294.3	72.1	85.4	89.2
105°	371.2	407.9	74.5	87.9	92.8
107.5°	457.9	488.3	77.0	90.3	95.3
110°	541.0	566.5	213.7	91.6	96.4



TEST NUMBER: P905987

CATALOG NUMBER: DFN2DIP-PN4F0-070D050US835-RLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	619.1	641.0	620.3	94.0	97.7
115°	702.1	722.8	753.4	188.1	100.2
117.5°	774.1	798.5	819.4	644.6	324.8
120°	854.7	873.0	895.0	909.7	744.8
122.5°	923.0	942.6	967.1	974.4	975.7
125°	992.6	1008.6	1031.8	1040.3	1044.0
127.5°	1056.1	1073.2	1091.7	1103.8	1105.0
130°	1116.0	1135.6	1148.9	1162.4	1161.3
132.5°	1177.1	1193.0	1206.3	1217.4	1216.2
135°	1228.4	1248.0	1258.8	1271.2	1268.7
137.5°	1282.0	1296.7	1309.0	1321.2	1317.6
140°	1334.5	1344.4	1357.7	1368.7	1362.7
142.5°	1378.6	1387.2	1403.0	1412.7	1406.6
145°	1425.0	1423.7	1444.4	1453.0	1446.9
147.5°	1465.2	1461.5	1482.3	1488.4	1483.6
150°	1504.3	1495.8	1515.3	1522.6	1516.5
152.5°	1537.2	1527.5	1545.8	1553.2	1544.6
155°	1569.0	1558.1	1572.7	1580.0	1570.3
157.5°	1594.6	1584.9	1595.9	1604.5	1594.6
160°	1616.7	1609.3	1616.7	1623.9	1615.4
162.5°	1636.1	1628.9	1634.9	1643.5	1632.5
165°	1653.2	1646.0	1649.6	1658.1	1649.6
167.5°	1666.7	1659.3	1663.1	1671.6	1660.6
170°	1677.7	1670.3	1672.8	1681.3	1670.3
172.5°	1685.0	1677.7	1680.2	1688.7	1677.7
175°	1691.1	1682.5	1685.0	1693.5	1681.3
177.5°	1693.5	1685.0	1686.3	1694.8	1683.8
180°	1687.4	1687.4	1687.4	1687.4	1687.4



TEST NUMBER: P905987  
 CATALOG NUMBER: DFN2DIP-PN4F0-070D050US835-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.17	11.04	11.10	11.98	13.18	6.14	7.01	7.06	7.94	9.15
	3H	11.86	12.63	12.79	13.58	14.81	7.33	8.11	8.26	9.05	10.28
	4H	12.47	13.20	13.42	14.15	15.39	7.78	8.52	8.73	9.47	10.71
	6H	12.89	13.57	13.85	14.53	15.78	8.11	8.78	9.07	9.74	10.99
	8H	13.02	13.67	13.99	14.64	15.89	8.20	8.84	9.17	9.81	11.06
	12H	13.09	13.70	14.06	14.67	15.94	8.24	8.85	9.22	9.82	11.10
4H	2H	10.20	10.93	11.15	11.88	13.12	6.74	7.47	7.69	8.42	9.66
	3H	12.03	12.64	13.00	13.62	14.88	8.09	8.70	9.06	9.68	10.94
	4H	12.73	13.28	13.70	14.26	15.54	8.64	9.20	9.62	10.18	11.45
	6H	13.25	13.73	14.23	14.72	16.00	9.07	9.54	10.05	10.54	11.82
	8H	13.42	13.87	14.41	14.86	16.15	9.20	9.64	10.18	10.64	11.93
	12H	13.52	13.93	14.53	14.93	16.23	9.26	9.67	10.27	10.67	11.97
8H	4H	12.70	13.14	13.69	14.14	15.43	8.93	9.38	9.92	10.37	11.66
	6H	13.27	13.64	14.28	14.67	15.96	9.45	9.82	10.46	10.85	12.14
	8H	13.49	13.81	14.51	14.83	16.14	9.64	9.97	10.66	10.99	12.30
	12H	13.63	13.92	14.65	14.93	16.28	9.76	10.05	10.79	11.06	12.42
12H	4H	12.65	13.05	13.66	14.06	15.36	8.94	9.34	9.94	10.35	11.64
	6H	13.24	13.57	14.27	14.59	15.90	9.50	9.83	10.52	10.85	12.15
	8H	13.47	13.75	14.49	14.77	16.12	9.71	10.00	10.74	11.01	12.37