

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906012

Luminaire Tested: DFN2DIP-PN4F0-070D120US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906012
REPORT IS A COMBINATION OF REPORTS P899759 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-070D120US835-FLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17550.0 lumens
Efficiency: N/A
Efficacy: 103.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 170.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906012

CATALOG NUMBER: DFN2DIP-PN4F0-070D120US835-FLLFLL

Luminous Intensity Polar Plot

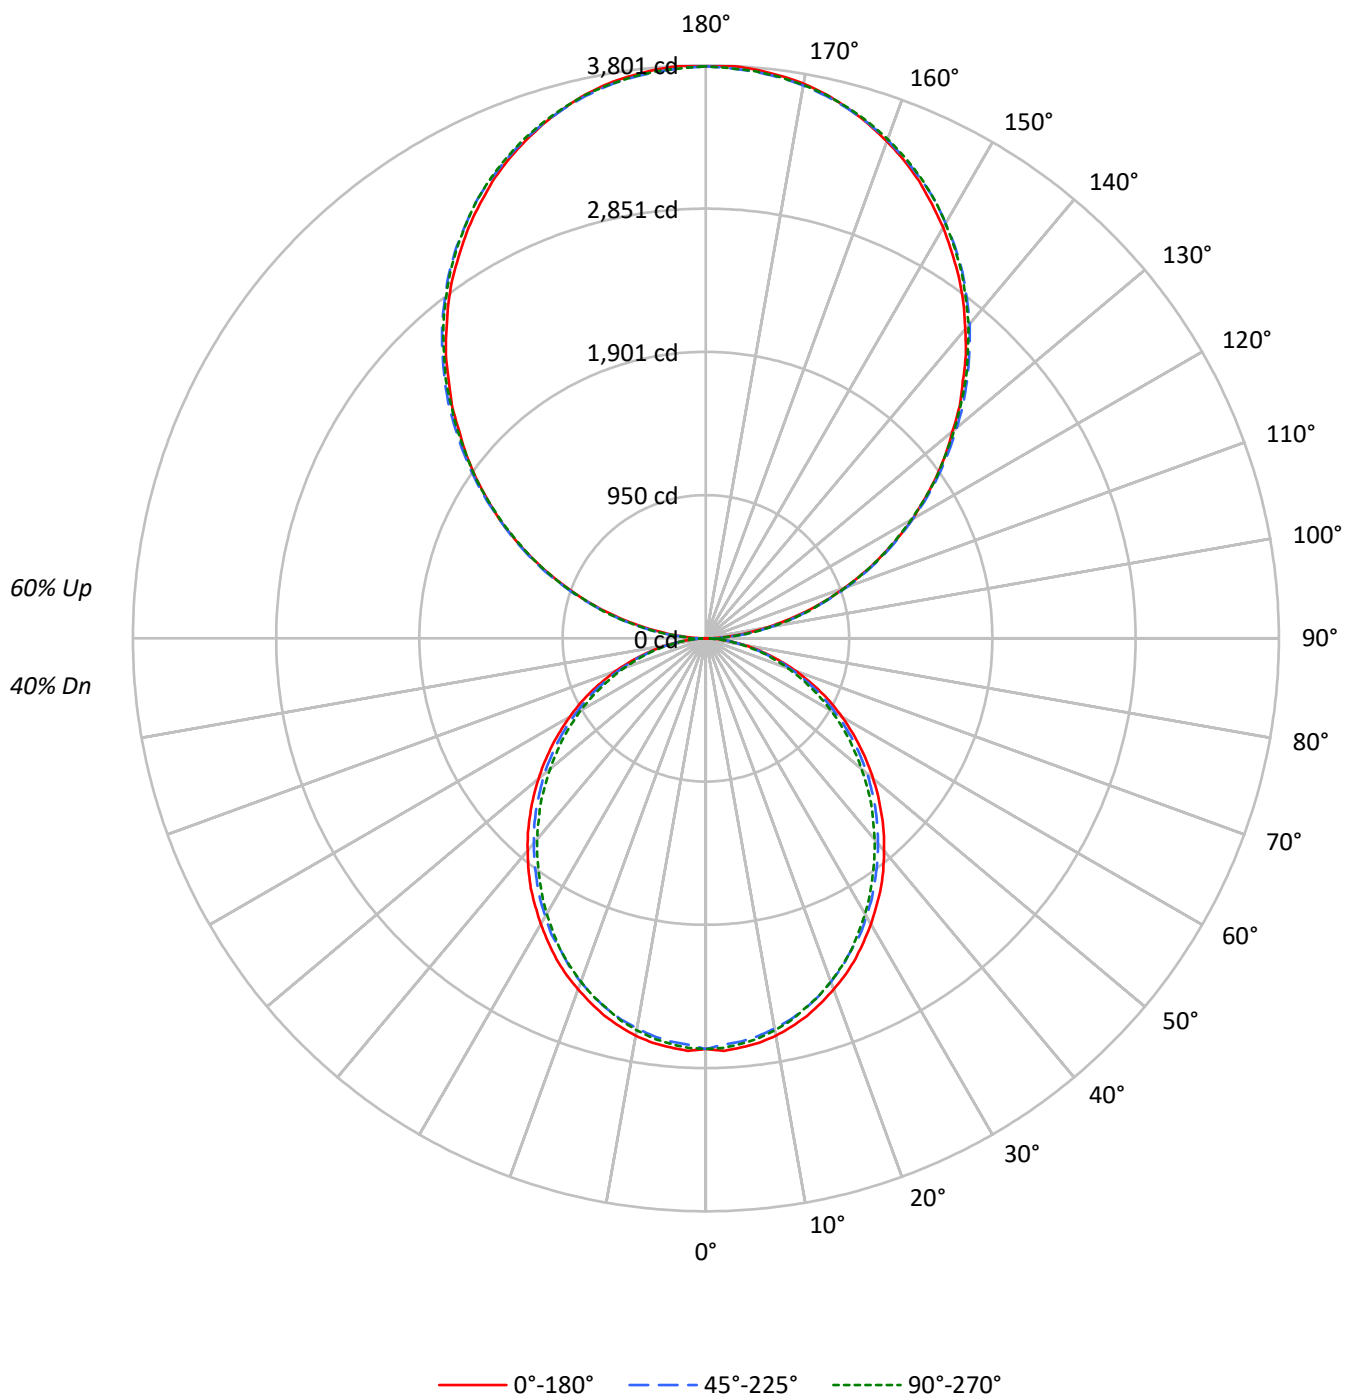

TEST NUMBER: P906012

CATALOG NUMBER: DFN2DIP-PN4F0-070D120US835-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	78	78	78	61	61	61	47	47	47
1	95	91	87	84	87	83	80	77	68	66	64	54	52	51	41	40	39
2	87	80	74	68	79	73	67	63	59	56	53	47	45	43	36	35	33
3	79	70	63	57	72	64	58	53	52	48	44	42	39	36	32	30	28
4	72	62	54	48	66	57	50	45	47	42	38	37	34	31	29	26	24
5	66	55	47	41	60	50	43	38	42	36	32	33	30	27	26	23	21
6	61	49	41	36	55	45	38	33	37	32	28	30	26	23	23	21	19
7	56	44	37	31	51	41	34	29	34	29	25	27	24	21	21	19	16
8	52	40	33	27	48	37	30	26	31	26	22	25	21	18	20	17	15
9	49	37	29	24	44	34	27	23	28	23	20	23	19	16	18	15	13
10	45	34	27	22	41	31	25	20	26	21	18	21	17	15	17	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1988	1988	1988
5°	1991	1961	1974
10°	1975	1935	1948
15°	1946	1903	1906
20°	1907	1859	1864
25°	1868	1806	1815
30°	1819	1757	1752
35°	1773	1700	1686
40°	1716	1641	1623
45°	1659	1583	1559
50°	1596	1521	1484
55°	1531	1450	1416
60°	1458	1366	1338
65°	1377	1279	1245
70°	1275	1172	1146
75°	1133	1045	1055
80°	963	883	879
85°	696	603	588

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2972 cd/sqm

TEST NUMBER: P906012

CATALOG NUMBER: DFN2DIP-PN4F0-070D120US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	256.4	1.5
10°-20°	721.3	4.1
20°-30°	1060.0	6.0
30°-40°	1231.1	7.0
40°-50°	1229.6	7.0
50°-60°	1072.2	6.1
60°-70°	792.6	4.5
70°-80°	448.4	2.6
80°-90°	129.1	0.7
90°-100°	234.8	1.3
100°-110°	746.2	4.3
110°-120°	1276.9	7.3
120°-130°	1679.4	9.6
130°-140°	1885.0	10.7
140°-150°	1848.5	10.5
150°-160°	1550.6	8.8
160°-170°	1028.3	5.9
170°-180°	359.4	2.0
0°-30°	2037.7	11.6
0°-40°	3268.8	18.6
0°-60°	5570.6	31.7
0°-90°	6940.8	39.5
90°-120°	2257.9	12.9
90°-150°	7670.8	43.7
90°-180°	10609.0	60.5
0°-180°	17550.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2724	2724	2724	2724	2724	
5°	2724	2714	2685	2705	2700	259
15°	2593	2577	2543	2554	2541	730
25°	2347	2326	2281	2286	2281	1080
35°	2025	1998	1956	1941	1928	1264
45°	1648	1629	1590	1561	1550	1271
55°	1247	1231	1200	1168	1155	1115
65°	841	825	799	775	762	831
75°	440	435	422	406	411	470
85°	107	105	102	94	92	120
90°	3	41	112	105	109	17
95°	167	199	205	205	199	186
105°	689	698	705	710	710	727
115°	1281	1300	1294	1291	1281	1267
125°	1864	1892	1883	1873	1870	1666
135°	2411	2446	2453	2450	2440	1863
145°	2927	2950	2968	2971	2959	1829
155°	3347	3356	3366	3382	3372	1540
165°	3641	3637	3637	3660	3644	1027
175°	3788	3779	3772	3795	3776	360
180°	3795	3795	3795	3795	3795	

TEST NUMBER: P906012

CATALOG NUMBER: DFN2DIP-PN4F0-070D120US835-FLLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2723.7	2723.7	2723.7	2723.7	2723.7
2.5°	2739.6	2726.5	2697.6	2723.7	2718.7
5°	2723.7	2713.5	2684.6	2705.4	2700.4
7.5°	2705.4	2689.8	2660.9	2682.1	2676.8
10°	2676.8	2658.4	2627.0	2647.9	2640.1
12.5°	2637.3	2621.8	2590.4	2603.4	2598.1
15°	2592.9	2577.3	2543.1	2553.7	2540.6
17.5°	2537.8	2522.3	2488.1	2501.2	2488.1
20°	2477.5	2462.0	2425.3	2433.1	2422.8
22.5°	2417.5	2393.9	2359.7	2359.7	2354.4
25°	2346.7	2325.8	2281.4	2286.4	2281.4
27.5°	2268.0	2249.7	2215.8	2208.0	2194.9
30°	2189.7	2168.5	2129.4	2121.6	2111.0
32.5°	2105.7	2090.2	2048.2	2032.4	2021.8
35°	2024.6	1998.5	1956.5	1940.7	1927.6
37.5°	1932.9	1909.3	1867.3	1849.0	1835.9
40°	1838.7	1817.6	1775.6	1752.3	1741.7
42.5°	1747.0	1725.9	1684.2	1657.8	1642.2
45°	1647.5	1629.2	1589.7	1561.1	1550.5
47.5°	1550.5	1532.2	1490.2	1461.3	1445.8
50°	1448.3	1435.2	1398.5	1361.9	1348.8
52.5°	1348.8	1330.5	1296.6	1267.7	1249.3
55°	1246.8	1231.0	1199.6	1168.2	1155.1
57.5°	1144.6	1131.5	1097.3	1065.9	1055.4
60°	1042.3	1032.0	995.4	966.5	958.7
62.5°	942.8	924.5	898.4	872.3	861.7
65°	840.9	825.0	798.9	775.3	762.2
67.5°	736.1	722.8	699.4	681.1	670.5
70°	639.1	628.6	604.9	586.6	576.3
72.5°	539.6	529.1	516.0	497.7	489.9
75°	439.9	434.9	421.5	406.0	411.3
77.5°	351.0	340.4	335.1	327.3	319.6
80°	262.0	259.3	254.0	246.2	240.9
82.5°	178.1	178.1	175.6	165.1	165.1
85°	107.3	104.8	102.3	94.2	91.7
87.5°	47.2	42.0	36.7	28.9	26.1
90°	3.4	41.2	112.1	105.3	108.7
92.5°	70.9	96.1	99.5	103.0	103.0
95°	167.0	199.1	204.8	204.8	199.1
97.5°	278.0	307.8	320.4	320.4	320.4
100°	406.2	432.5	441.6	441.6	438.2
102.5°	541.2	560.6	573.2	576.7	573.2
105°	688.8	697.9	704.8	710.5	710.5
107.5°	835.2	849.0	849.0	851.2	835.2
110°	977.1	995.4	995.4	995.4	986.3

TEST NUMBER: P906012

CATALOG NUMBER: DFN2DIP-PN4F0-070D120US835-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1130.4	1149.9	1146.4	1137.3	1130.4
115°	1281.4	1299.8	1294.0	1290.6	1281.4
117.5°	1431.3	1456.5	1440.5	1431.3	1422.2
120°	1582.4	1607.5	1582.4	1582.4	1572.1
122.5°	1719.7	1751.7	1735.7	1726.5	1719.7
125°	1863.8	1892.4	1883.3	1873.0	1869.5
127.5°	2004.6	2040.0	2027.4	2013.7	2004.6
130°	2136.1	2177.3	2171.6	2164.7	2152.1
132.5°	2283.7	2315.8	2318.0	2302.0	2292.9
135°	2410.7	2446.2	2453.1	2449.6	2440.5
137.5°	2552.6	2581.2	2586.9	2584.6	2570.9
140°	2677.3	2705.9	2721.9	2721.9	2709.3
142.5°	2805.5	2834.1	2843.2	2846.6	2834.1
145°	2926.7	2949.6	2967.9	2971.4	2958.8
147.5°	3035.4	3064.0	3077.8	3083.5	3070.9
150°	3147.6	3167.0	3179.6	3189.9	3179.6
152.5°	3247.1	3266.5	3282.6	3295.2	3282.6
155°	3346.6	3355.8	3366.1	3382.1	3371.8
157.5°	3432.5	3439.3	3445.0	3467.9	3451.9
160°	3509.1	3516.0	3519.4	3538.9	3525.1
162.5°	3580.0	3580.0	3583.5	3605.2	3589.2
165°	3640.7	3637.3	3637.3	3660.1	3644.1
167.5°	3695.6	3685.3	3685.3	3708.2	3692.2
170°	3736.8	3727.6	3724.2	3747.1	3727.6
172.5°	3765.4	3756.2	3752.8	3775.7	3756.2
175°	3788.3	3779.1	3772.3	3795.1	3775.7
177.5°	3800.9	3791.7	3784.8	3804.3	3784.8
180°	3795.1	3795.1	3795.1	3795.1	3795.1

TEST NUMBER: P906012

CATALOG NUMBER: DFN2DIP-PN4F0-070D120US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.61	9.39	9.66	10.44	11.85	8.17	8.95	9.22	10.00	11.41
	3H	10.27	10.96	11.32	12.02	13.45	9.79	10.48	10.84	11.54	12.97
	4H	10.86	11.51	11.92	12.57	14.01	10.37	11.03	11.43	12.09	13.52
	6H	11.25	11.86	12.33	12.92	14.37	10.76	11.37	11.83	12.43	13.88
	8H	11.36	11.93	12.43	13.01	14.46	10.86	11.44	11.94	12.52	13.97
	12H	11.40	11.95	12.49	13.02	14.49	10.90	11.45	11.99	12.52	13.99
4H	2H	9.06	9.72	10.13	10.78	12.22	8.71	9.37	9.78	10.43	11.87
	3H	10.93	11.48	12.00	12.56	14.01	10.52	11.07	11.60	12.16	13.61
	4H	11.64	12.14	12.72	13.22	14.69	11.22	11.73	12.30	12.80	14.28
	6H	12.15	12.58	13.24	13.68	15.15	11.73	12.16	12.82	13.26	14.73
	8H	12.30	12.71	13.39	13.80	15.28	11.87	12.28	12.96	13.37	14.85
	12H	12.37	12.74	13.48	13.84	15.33	11.93	12.30	13.04	13.40	14.89
8H	4H	11.83	12.23	12.92	13.32	14.81	11.46	11.86	12.55	12.95	14.44
	6H	12.46	12.79	13.57	13.93	15.41	12.08	12.42	13.20	13.55	15.03
	8H	12.68	12.97	13.80	14.09	15.59	12.30	12.59	13.42	13.71	15.20
	12H	12.81	13.07	13.94	14.18	15.72	12.41	12.67	13.53	13.78	15.32
12H	4H	11.81	12.18	12.92	13.28	14.77	11.45	11.81	12.56	12.92	14.41
	6H	12.49	12.78	13.61	13.90	15.40	12.12	12.42	13.24	13.53	15.03
	8H	12.73	12.99	13.85	14.10	15.64	12.36	12.61	13.48	13.73	15.26