

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906026

Luminaire Tested: DFN2DIP-PN4F0-080D060US835-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P906026  
REPORT IS A COMBINATION OF REPORTS P899654 AND P896497  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-PN4F0-080D060US835-RLLFLL  
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 12110.0 lumens  
Efficiency: N/A  
Efficacy: 99.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 122.3  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9971  
Total Harmonic Distortion (THDi): 0.049  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P906026  
CATALOG NUMBER: DFN2DIP-PN4F0-080D060US835-RLLFLL

### Luminous Intensity Polar Plot

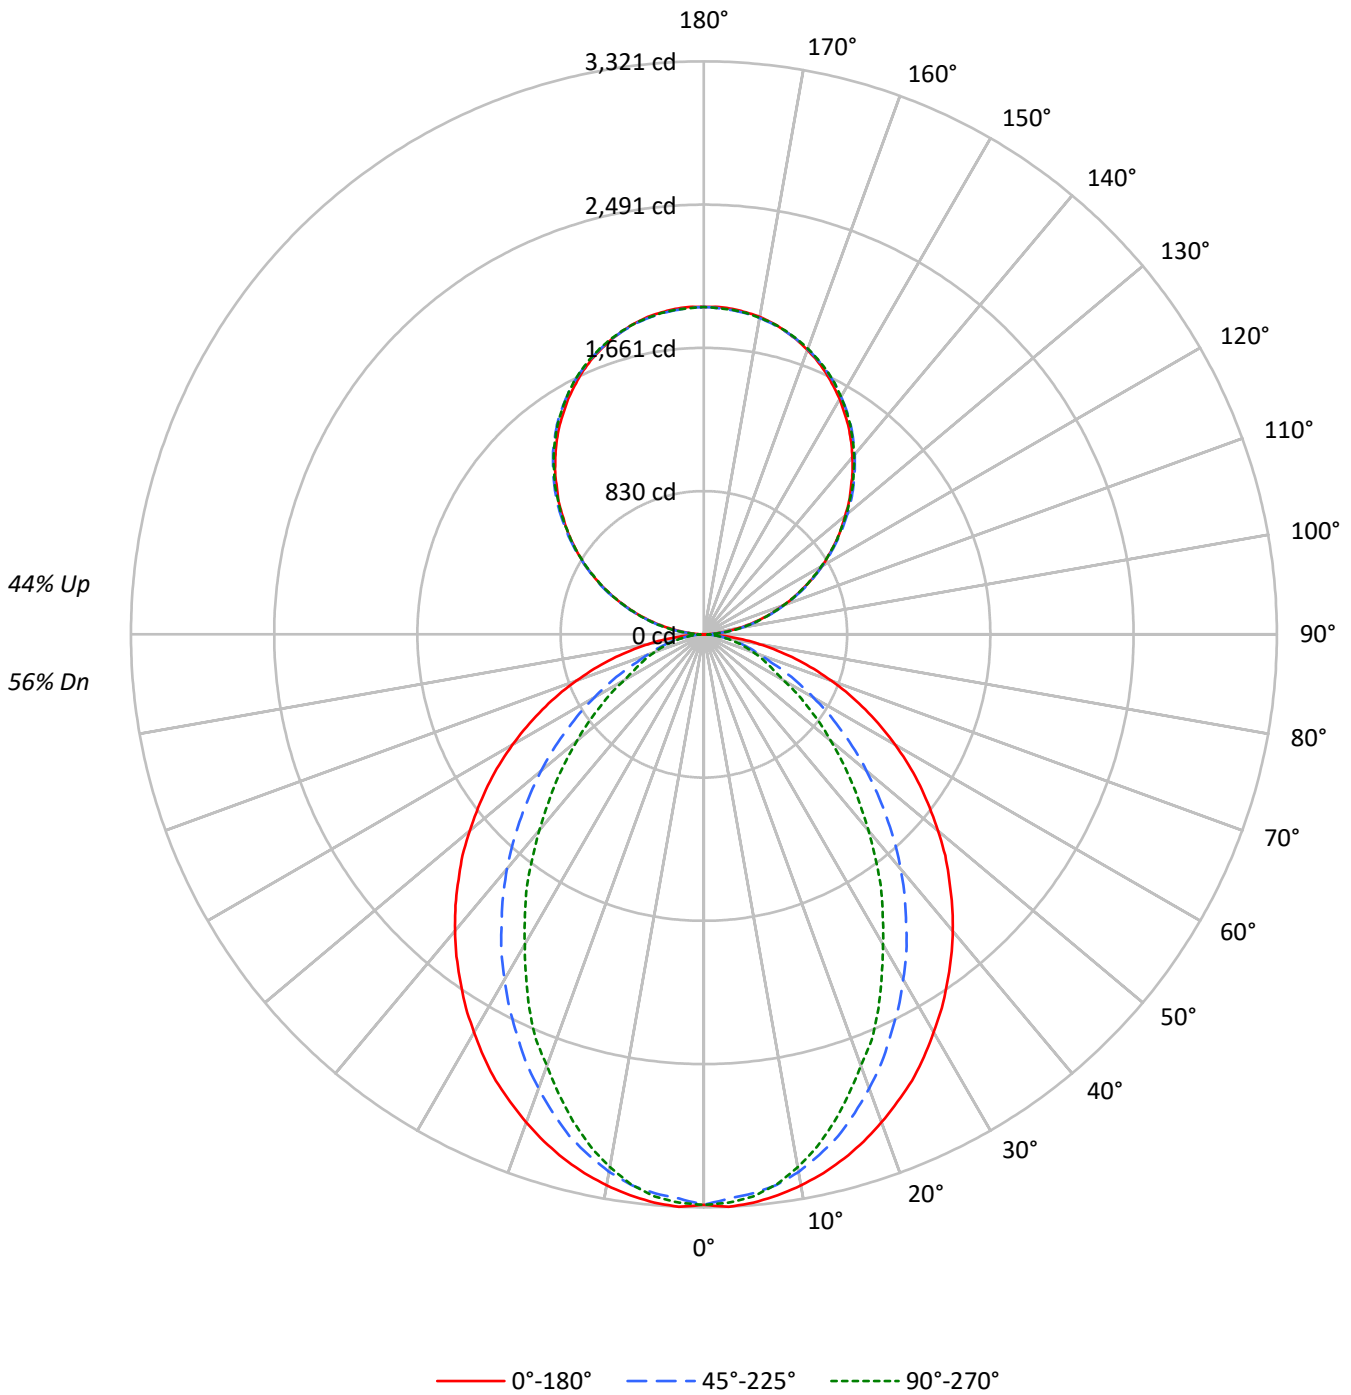



TEST NUMBER: P906026

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US835-RLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56	56	56	56
1	100	96	92	88	93	89	86	83	77	75	72	66	64	63	55	54	53	48	48	48	48
2	91	84	78	73	85	79	73	69	68	64	61	58	56	53	49	47	46	41	41	41	41
3	84	74	67	62	78	70	63	58	61	56	52	52	49	46	44	42	40	36	36	36	36
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35	31	31	31	31
5	71	59	51	46	66	56	49	43	49	43	39	42	38	35	36	33	30	27	27	27	27
6	65	53	46	40	61	50	43	38	44	38	34	38	34	31	33	30	27	24	24	24	24
7	61	48	41	35	56	46	39	34	40	35	30	35	31	27	30	27	24	22	22	22	22
8	56	44	37	31	52	42	35	30	37	31	27	32	28	25	28	25	22	20	20	20	20
9	53	41	33	28	49	38	32	27	34	28	25	30	25	22	26	23	20	18	18	18	18
10	49	37	30	25	46	35	29	24	31	26	22	28	23	20	24	21	18	16	16	16	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2414	2414	2414
5°	2417	2376	2391
10°	2393	2329	2313
15°	2360	2253	2194
20°	2317	2147	2046
25°	2272	2028	1904
30°	2212	1906	1724
35°	2154	1775	1565
40°	2094	1640	1383
45°	2024	1490	1218
50°	1953	1338	1057
55°	1878	1176	903
60°	1791	1006	743
65°	1691	833	669
70°	1570	673	607
75°	1418	594	553
80°	1198	499	481
85°	835	335	364

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2024 cd/sqm



TEST NUMBER: P906026

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US835-RLFL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	309.9	2.6
10°-20°	850.7	7.0
20°-30°	1194.3	9.9
30°-40°	1301.9	10.8
40°-50°	1196.6	9.9
50°-60°	939.7	7.8
60°-70°	611.7	5.1
70°-80°	314.9	2.6
80°-90°	85.8	0.7
90°-100°	117.4	1.0
100°-110°	373.1	3.1
110°-120°	638.5	5.3
120°-130°	839.7	6.9
130°-140°	942.5	7.8
140°-150°	924.2	7.6
150°-160°	775.3	6.4
160°-170°	514.2	4.2
170°-180°	179.7	1.5
0°-30°	2354.9	19.4
0°-40°	3656.8	30.2
0°-60°	5793.1	47.8
0°-90°	6805.4	56.2
90°-120°	1129.0	9.3
90°-150°	3835.4	31.7
90°-180°	5305.0	43.8
0°-180°	12110.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	3306	3306	3306	3306	3306	
5°	3306	3292	3252	3279	3270	314
15°	3145	3112	3010	2953	2924	886
25°	2855	2759	2561	2439	2394	1313
35°	2460	2307	2044	1855	1789	1540
45°	2011	1810	1496	1284	1212	1553
55°	1529	1296	972	793	736	1366
65°	1032	790	521	419	410	1024
75°	550	341	239	218	216	582
85°	129	66	57	57	57	148
90°	2	21	56	53	54	12
95°	84	100	102	102	100	93
105°	344	349	352	355	355	363
115°	641	650	647	645	641	634
125°	932	946	942	936	935	833
135°	1205	1223	1226	1225	1220	932
145°	1463	1475	1484	1486	1479	914
155°	1673	1678	1683	1691	1686	770
165°	1820	1819	1819	1830	1822	514
175°	1894	1890	1886	1898	1888	180
180°	1898	1898	1898	1898	1898	



TEST NUMBER: P906026

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US835-RLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	3306.4	3306.4	3306.4	3306.4	3306.4
2.5°	3321.3	3306.4	3273.4	3303.5	3297.5
5°	3306.4	3291.5	3252.4	3279.4	3270.5
7.5°	3279.4	3261.6	3219.7	3231.5	3216.5
10°	3243.5	3222.6	3162.9	3153.7	3135.9
12.5°	3198.8	3171.8	3090.8	3073.0	3040.0
15°	3144.8	3111.8	3010.2	2953.4	2923.5
17.5°	3081.9	3034.0	2908.3	2842.6	2794.6
20°	3010.2	2950.2	2800.7	2726.1	2660.0
22.5°	2932.4	2863.5	2689.9	2588.3	2543.5
25°	2854.6	2758.8	2561.3	2438.8	2393.7
27.5°	2761.9	2660.0	2441.6	2301.0	2232.1
30°	2663.2	2549.2	2309.9	2157.5	2076.5
32.5°	2567.3	2429.6	2184.5	2004.8	1929.9
35°	2459.7	2307.0	2043.8	1855.3	1789.2
37.5°	2354.9	2190.2	1912.1	1705.4	1630.8
40°	2244.2	2064.8	1774.3	1561.9	1484.1
42.5°	2130.5	1939.1	1636.8	1415.3	1340.6
45°	2010.8	1810.2	1496.2	1283.5	1211.8
47.5°	1897.2	1684.8	1361.6	1148.9	1083.2
50°	1771.4	1559.1	1229.9	1023.2	960.6
52.5°	1648.6	1424.1	1104.1	906.7	849.9
55°	1528.9	1295.6	972.4	793.0	736.2
57.5°	1406.4	1167.0	855.9	688.3	640.3
60°	1280.6	1041.3	733.0	580.6	532.7
62.5°	1158.1	918.7	628.3	484.8	461.0
65°	1032.4	789.8	520.6	419.1	409.8
67.5°	912.7	670.2	419.1	367.9	359.1
70°	787.0	553.7	347.0	317.1	305.1
72.5°	667.3	445.7	290.2	266.4	260.3
75°	550.5	341.0	239.4	218.4	215.6
77.5°	434.0	242.2	188.6	176.5	170.5
80°	326.0	173.7	143.5	131.7	131.7
82.5°	227.3	116.8	98.7	92.7	92.7
85°	128.6	65.7	56.8	56.8	56.8
87.5°	47.9	23.8	23.8	21.0	21.0
90°	1.7	20.6	56.1	52.6	54.3
92.5°	35.5	48.1	49.8	51.5	51.5
95°	83.5	99.5	102.4	102.4	99.5
97.5°	139.0	153.9	160.2	160.2	160.2
100°	203.1	216.2	220.8	220.8	219.1
102.5°	270.6	280.3	286.6	288.3	286.6
105°	344.4	349.0	352.4	355.3	355.3
107.5°	417.6	424.5	424.5	425.6	417.6
110°	488.6	497.7	497.7	497.7	493.1



TEST NUMBER: P906026

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US835-RLFL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	565.2	574.9	573.2	568.6	565.2
115°	640.7	649.9	647.0	645.3	640.7
117.5°	715.7	728.3	720.2	715.7	711.1
120°	791.2	803.8	791.2	791.2	786.0
122.5°	859.8	875.8	867.8	863.3	859.8
125°	931.9	946.2	941.6	936.5	934.8
127.5°	1002.3	1020.0	1013.7	1006.9	1002.3
130°	1068.1	1088.7	1085.8	1082.4	1076.1
132.5°	1141.9	1157.9	1159.0	1151.0	1146.4
135°	1205.4	1223.1	1226.5	1224.8	1220.2
137.5°	1276.3	1290.6	1293.5	1292.3	1285.5
140°	1338.7	1353.0	1361.0	1361.0	1354.7
142.5°	1402.7	1417.0	1421.6	1423.3	1417.0
145°	1463.4	1474.8	1484.0	1485.7	1479.4
147.5°	1517.7	1532.0	1538.9	1541.7	1535.4
150°	1573.8	1583.5	1589.8	1594.9	1589.8
152.5°	1623.5	1633.3	1641.3	1647.6	1641.3
155°	1673.3	1677.9	1683.0	1691.1	1685.9
157.5°	1716.2	1719.7	1722.5	1734.0	1726.0
160°	1754.6	1758.0	1759.7	1769.4	1762.6
162.5°	1790.0	1790.0	1791.7	1802.6	1794.6
165°	1820.3	1818.6	1818.6	1830.1	1822.1
167.5°	1847.8	1842.7	1842.7	1854.1	1846.1
170°	1868.4	1863.8	1862.1	1873.5	1863.8
172.5°	1882.7	1878.1	1876.4	1887.8	1878.1
175°	1894.1	1889.6	1886.1	1897.6	1887.8
177.5°	1900.4	1895.9	1892.4	1902.1	1892.4
180°	1897.6	1897.6	1897.6	1897.6	1897.6



TEST NUMBER: P906026  
 CATALOG NUMBER: DFN2DIP-PN4F0-080D060US835-RLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.77	11.66	11.68	12.58	13.76	6.74	7.62	7.65	8.55	9.73
	3H	12.46	13.25	13.38	14.18	15.39	7.93	8.72	8.85	9.66	10.86
	4H	13.07	13.82	14.01	14.76	15.97	8.39	9.13	9.32	10.07	11.29
	6H	13.50	14.19	14.45	15.13	16.36	8.71	9.40	9.66	10.34	11.57
	8H	13.63	14.28	14.58	15.24	16.47	8.80	9.46	9.76	10.42	11.64
	12H	13.69	14.31	14.65	15.27	16.52	8.85	9.47	9.81	10.42	11.68
4H	2H	10.80	11.55	11.74	12.48	13.70	7.34	8.09	8.28	9.03	10.24
	3H	12.64	13.26	13.59	14.22	15.46	8.70	9.32	9.65	10.29	11.52
	4H	13.33	13.90	14.29	14.86	16.12	9.25	9.81	10.21	10.78	12.03
	6H	13.85	14.34	14.83	15.33	16.58	9.67	10.16	10.65	11.14	12.40
	8H	14.03	14.49	15.01	15.47	16.73	9.80	10.26	10.78	11.24	12.51
	12H	14.13	14.54	15.12	15.54	16.81	9.87	10.28	10.86	11.28	12.55
8H	4H	13.30	13.76	14.28	14.74	16.01	9.54	9.99	10.51	10.97	12.24
	6H	13.88	14.25	14.88	15.27	16.54	10.06	10.43	11.06	11.45	12.72
	8H	14.09	14.43	15.10	15.43	16.72	10.25	10.58	11.26	11.59	12.87
	12H	14.24	14.53	15.25	15.53	16.86	10.37	10.66	11.38	11.67	13.00
12H	4H	13.26	13.67	14.25	14.66	15.94	9.54	9.95	10.54	10.95	12.22
	6H	13.85	14.18	14.86	15.19	16.48	10.11	10.44	11.12	11.45	12.73
	8H	14.08	14.37	15.09	15.37	16.70	10.32	10.61	11.33	11.62	12.95