

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906195

Luminaire Tested: DFN2DIP-PN4F0-120D120US835-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906195
REPORT IS A COMBINATION OF REPORTS P901290 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-120D120US835-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 22080.0 lumens
Efficiency: N/A
Efficacy: 96.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 229.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906195

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US835-RLLONL

Luminous Intensity Polar Plot

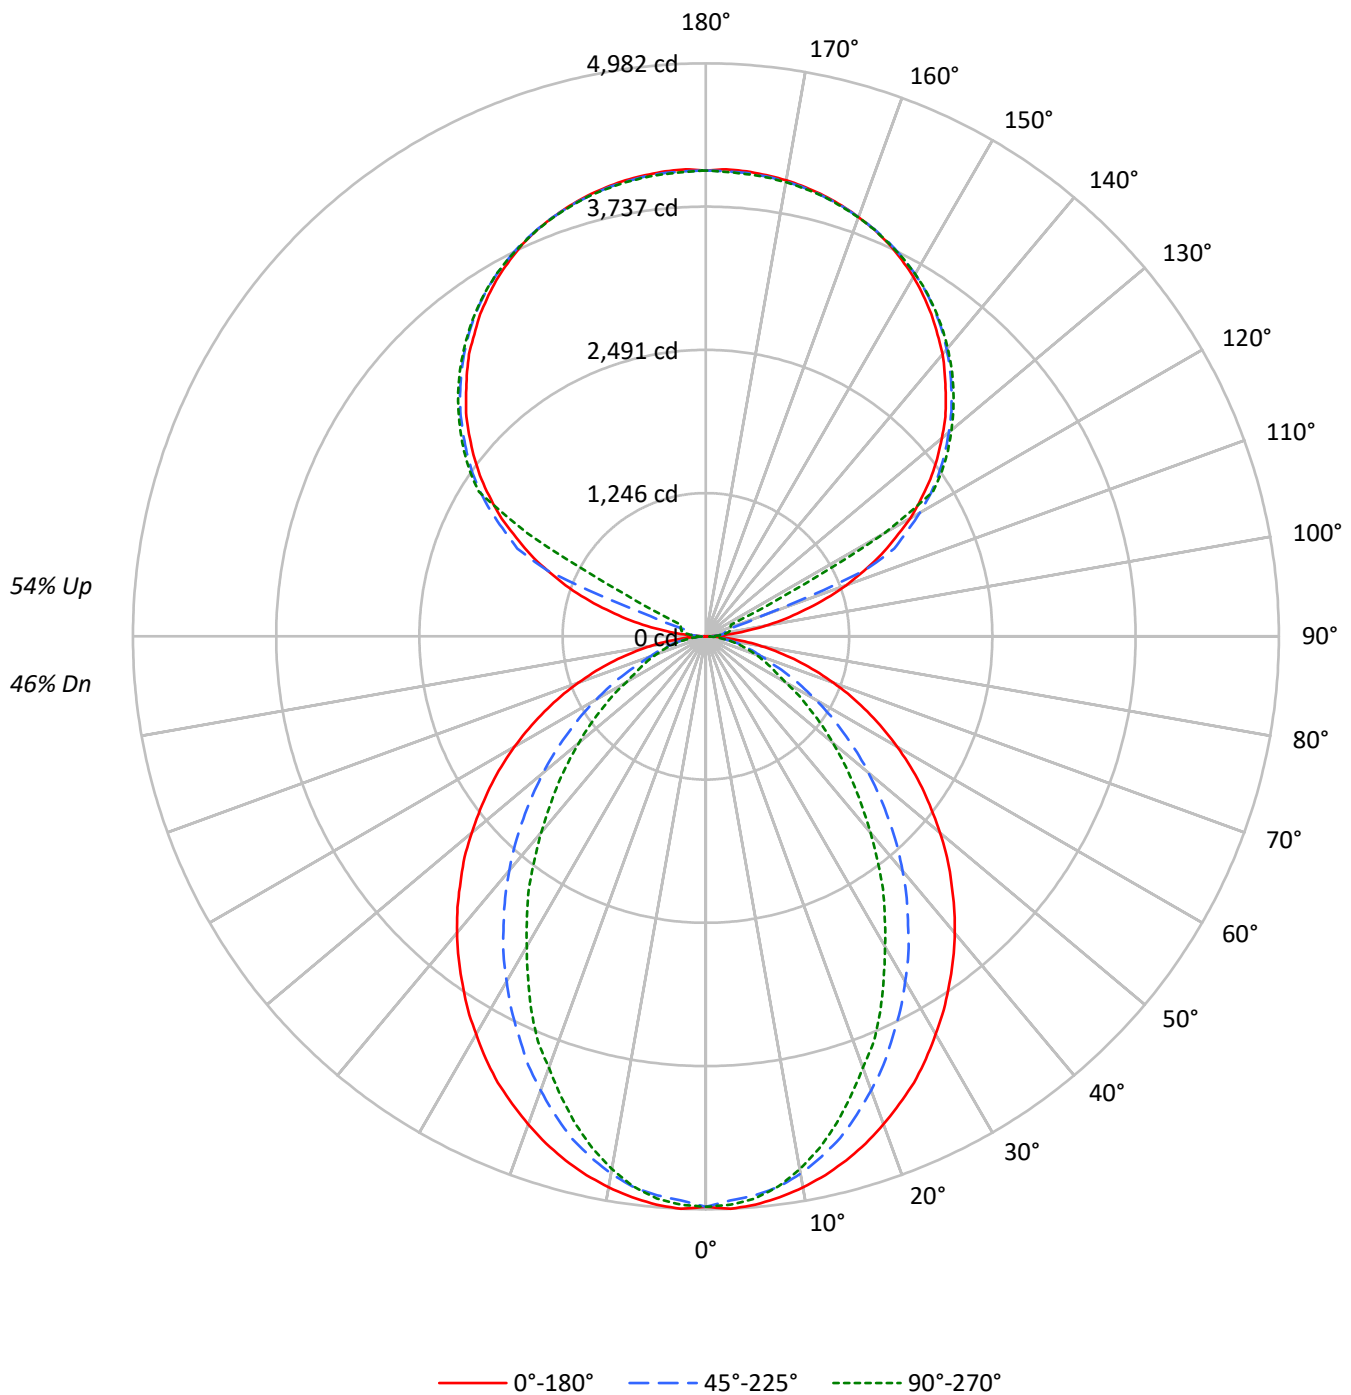

TEST NUMBER: P906195

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US835-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53			46
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45			40
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39			34
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34			29
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29			26
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26			23
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23			20
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21			18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19			16
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17			15
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15			13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3620	3620	3620
5°	3626	3563	3586
10°	3590	3494	3470
15°	3541	3379	3290
20°	3475	3220	3070
25°	3408	3042	2856
30°	3318	2860	2586
35°	3230	2663	2348
40°	3141	2460	2075
45°	3037	2235	1828
50°	2929	2007	1586
55°	2817	1763	1354
60°	2686	1509	1115
65°	2537	1250	1004
70°	2355	1009	910
75°	2127	890	829
80°	1797	748	721
85°	1252	502	547

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3037 cd/sqm

TEST NUMBER: P906195

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US835-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	464.8	2.1
10°-20°	1276.0	5.8
20°-30°	1791.5	8.1
30°-40°	1952.8	8.8
40°-50°	1794.9	8.1
50°-60°	1409.6	6.4
60°-70°	917.5	4.2
70°-80°	472.3	2.1
80°-90°	127.7	0.6
90°-100°	133.5	0.6
100°-110°	497.8	2.3
110°-120°	1320.3	6.0
120°-130°	2189.8	9.9
130°-140°	2326.1	10.5
140°-150°	2161.8	9.8
150°-160°	1738.1	7.9
160°-170°	1119.9	5.1
170°-180°	385.5	1.7
0°-30°	3532.3	16.0
0°-40°	5485.2	24.8
0°-60°	8689.6	39.4
0°-90°	10207.1	46.2
90°-120°	1951.7	8.8
90°-150°	8629.4	39.1
90°-180°	11873.0	53.8
0°-180°	22080.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4960	4960	4960	4960	4960	
5°	4960	4937	4879	4919	4906	470
15°	4717	4668	4515	4430	4385	1329
25°	4282	4138	3842	3658	3590	1969
35°	3690	3460	3066	2783	2684	2309
45°	3016	2715	2244	1925	1818	2329
55°	2293	1943	1459	1190	1104	2049
65°	1549	1185	781	629	615	1535
75°	826	511	359	328	323	873
85°	193	99	85	85	85	221
90°	3	35	58	73	79	21
95°	190	94	114	129	126	225
105°	891	979	179	211	223	952
115°	1685	1735	1808	451	240	1659
125°	2382	2421	2476	2497	2506	2125
135°	2948	2995	3021	3051	3045	2277
145°	3420	3417	3467	3487	3472	2139
155°	3766	3739	3775	3792	3769	1735
165°	3968	3950	3959	3980	3959	1121
175°	4058	4038	4044	4064	4035	386
180°	4050	4050	4050	4050	4050	

TEST NUMBER: P906195

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US835-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4959.6	4959.6	4959.6	4959.6	4959.6
2.5°	4982.0	4959.6	4910.1	4955.3	4946.2
5°	4959.6	4937.2	4878.6	4919.1	4905.8
7.5°	4919.1	4892.4	4829.6	4847.2	4824.8
10°	4865.3	4833.9	4744.3	4730.5	4703.9
12.5°	4798.1	4757.7	4636.2	4609.6	4560.1
15°	4717.2	4667.7	4515.3	4430.0	4385.3
17.5°	4622.9	4551.0	4362.4	4263.9	4192.0
20°	4515.3	4425.3	4201.0	4089.1	3990.0
22.5°	4398.6	4295.3	4034.8	3882.4	3815.3
25°	4282.0	4138.1	3841.9	3658.1	3590.5
27.5°	4142.9	3990.0	3662.4	3451.5	3348.1
30°	3994.8	3823.9	3464.8	3236.2	3114.8
32.5°	3851.0	3644.3	3276.7	3007.2	2894.8
35°	3689.6	3460.5	3065.7	2782.9	2683.8
37.5°	3532.4	3285.3	2868.1	2558.1	2446.2
40°	3366.2	3097.2	2661.5	2342.9	2226.2
42.5°	3195.7	2908.6	2455.3	2122.9	2011.0
45°	3016.2	2715.3	2244.3	1925.3	1817.6
47.5°	2845.7	2527.2	2042.4	1723.4	1624.8
50°	2657.2	2338.6	1844.8	1534.8	1441.0
52.5°	2472.9	2136.2	1656.2	1360.0	1274.8
55°	2293.4	1943.4	1458.6	1189.5	1104.3
57.5°	2109.5	1750.5	1283.8	1032.4	960.5
60°	1921.0	1561.9	1099.5	871.0	799.1
62.5°	1737.2	1378.1	942.4	727.2	691.4
65°	1548.6	1184.8	781.0	628.6	614.8
67.5°	1369.1	1005.2	628.6	551.9	538.6
70°	1180.5	830.5	520.5	475.7	457.6
72.5°	1001.0	668.6	435.2	399.5	390.5
75°	825.7	511.4	359.1	327.6	323.3
77.5°	651.0	363.3	282.9	264.8	255.7
80°	489.1	260.5	215.2	197.6	197.6
82.5°	341.0	175.2	148.1	139.0	139.0
85°	192.9	98.6	85.2	85.2	85.2
87.5°	71.9	35.7	35.7	31.4	31.4
90°	2.8	35.1	58.5	73.4	79.0
92.5°	73.4	61.6	70.3	76.2	79.0
95°	190.3	93.6	114.1	129.1	126.0
97.5°	342.8	102.7	149.3	158.3	161.1
100°	518.8	117.3	167.0	190.3	196.3
102.5°	712.0	706.4	172.9	205.0	214.0
105°	890.8	978.9	178.9	210.9	222.7
107.5°	1098.9	1172.0	184.8	216.8	228.6
110°	1298.3	1359.6	512.9	219.9	231.4

TEST NUMBER: P906195

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US835-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1485.9	1538.4	1488.7	225.5	234.5
115°	1684.9	1734.7	1808.1	451.3	240.5
117.5°	1857.9	1916.4	1966.5	1547.1	779.5
120°	2051.4	2095.2	2148.1	2183.3	1787.6
122.5°	2215.3	2262.3	2321.1	2338.5	2341.6
125°	2382.3	2420.6	2476.3	2496.8	2505.5
127.5°	2534.7	2575.8	2620.0	2649.2	2652.0
130°	2678.4	2725.4	2757.4	2789.8	2787.0
132.5°	2824.9	2863.2	2895.2	2921.7	2918.9
135°	2948.1	2995.1	3021.2	3050.8	3044.9
137.5°	3076.9	3112.0	3141.6	3170.8	3162.1
140°	3202.9	3226.5	3258.5	3285.0	3270.4
142.5°	3308.6	3329.2	3367.1	3390.4	3375.8
145°	3420.0	3416.9	3466.6	3487.2	3472.5
147.5°	3516.4	3507.7	3557.5	3572.1	3560.6
150°	3610.3	3589.8	3636.8	3654.2	3639.6
152.5°	3689.3	3666.0	3709.9	3727.6	3707.1
155°	3765.5	3739.4	3774.6	3792.0	3768.7
157.5°	3827.1	3803.8	3830.3	3850.8	3827.1
160°	3880.0	3862.3	3880.0	3897.4	3876.9
162.5°	3926.7	3909.3	3923.9	3944.4	3918.0
165°	3967.7	3950.3	3959.0	3979.6	3959.0
167.5°	4000.1	3982.3	3991.4	4011.9	3985.5
170°	4026.5	4008.8	4014.7	4035.2	4008.8
172.5°	4043.9	4026.5	4032.5	4053.0	4026.5
175°	4058.5	4038.0	4043.9	4064.5	4035.2
177.5°	4064.5	4043.9	4047.1	4067.6	4041.2
180°	4049.9	4049.9	4049.9	4049.9	4049.9

TEST NUMBER: P906195

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US835-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.26	12.06	12.26	13.06	14.39	7.23	8.03	8.22	9.03	10.36
	3H	12.94	13.65	13.95	14.67	16.01	8.41	9.13	9.42	10.14	11.49
	4H	13.55	14.23	14.57	15.24	16.60	8.86	9.54	9.88	10.55	11.91
	6H	13.97	14.59	15.00	15.61	16.98	9.18	9.81	10.21	10.82	12.19
	8H	14.10	14.69	15.13	15.73	17.09	9.27	9.87	10.31	10.90	12.26
	12H	14.16	14.72	15.20	15.75	17.14	9.32	9.88	10.35	10.91	12.29
4H	2H	11.28	11.95	12.30	12.97	14.32	7.82	8.50	8.84	9.51	10.87
	3H	13.11	13.67	14.14	14.71	16.08	9.17	9.73	10.20	10.77	12.14
	4H	13.80	14.31	14.84	15.35	16.74	9.72	10.23	10.76	11.26	12.66
	6H	14.31	14.76	15.37	15.81	17.20	10.13	10.58	11.18	11.63	13.02
	8H	14.49	14.90	15.54	15.95	17.36	10.26	10.67	11.31	11.73	13.13
	12H	14.59	14.96	15.66	16.02	17.43	10.33	10.70	11.40	11.76	13.17
8H	4H	13.76	14.18	14.82	15.23	16.63	9.99	10.41	11.05	11.46	12.86
	6H	14.33	14.67	15.41	15.77	17.17	10.51	10.85	11.59	11.95	13.35
	8H	14.55	14.85	15.63	15.93	17.35	10.71	11.00	11.79	12.08	13.50
	12H	14.69	14.95	15.77	16.03	17.49	10.82	11.09	11.91	12.16	13.62
12H	4H	13.71	14.09	14.78	15.15	16.56	10.00	10.37	11.07	11.44	12.84
	6H	14.31	14.61	15.39	15.68	17.10	10.56	10.86	11.64	11.94	13.36
	8H	14.53	14.79	15.61	15.86	17.32	10.77	11.04	11.86	12.11	13.57