

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908670

Luminaire Tested: DFN2DIP-PN4F0-050D120US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P908670
REPORT IS A COMBINATION OF REPORTS P899756 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-050D120US840-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15016.7 lumens
Efficiency: N/A
Efficacy: 101.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 147.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P908670

CATALOG NUMBER: DFN2DIP-PN4F0-050D120US840-RLLFLL

Luminous Intensity Polar Plot

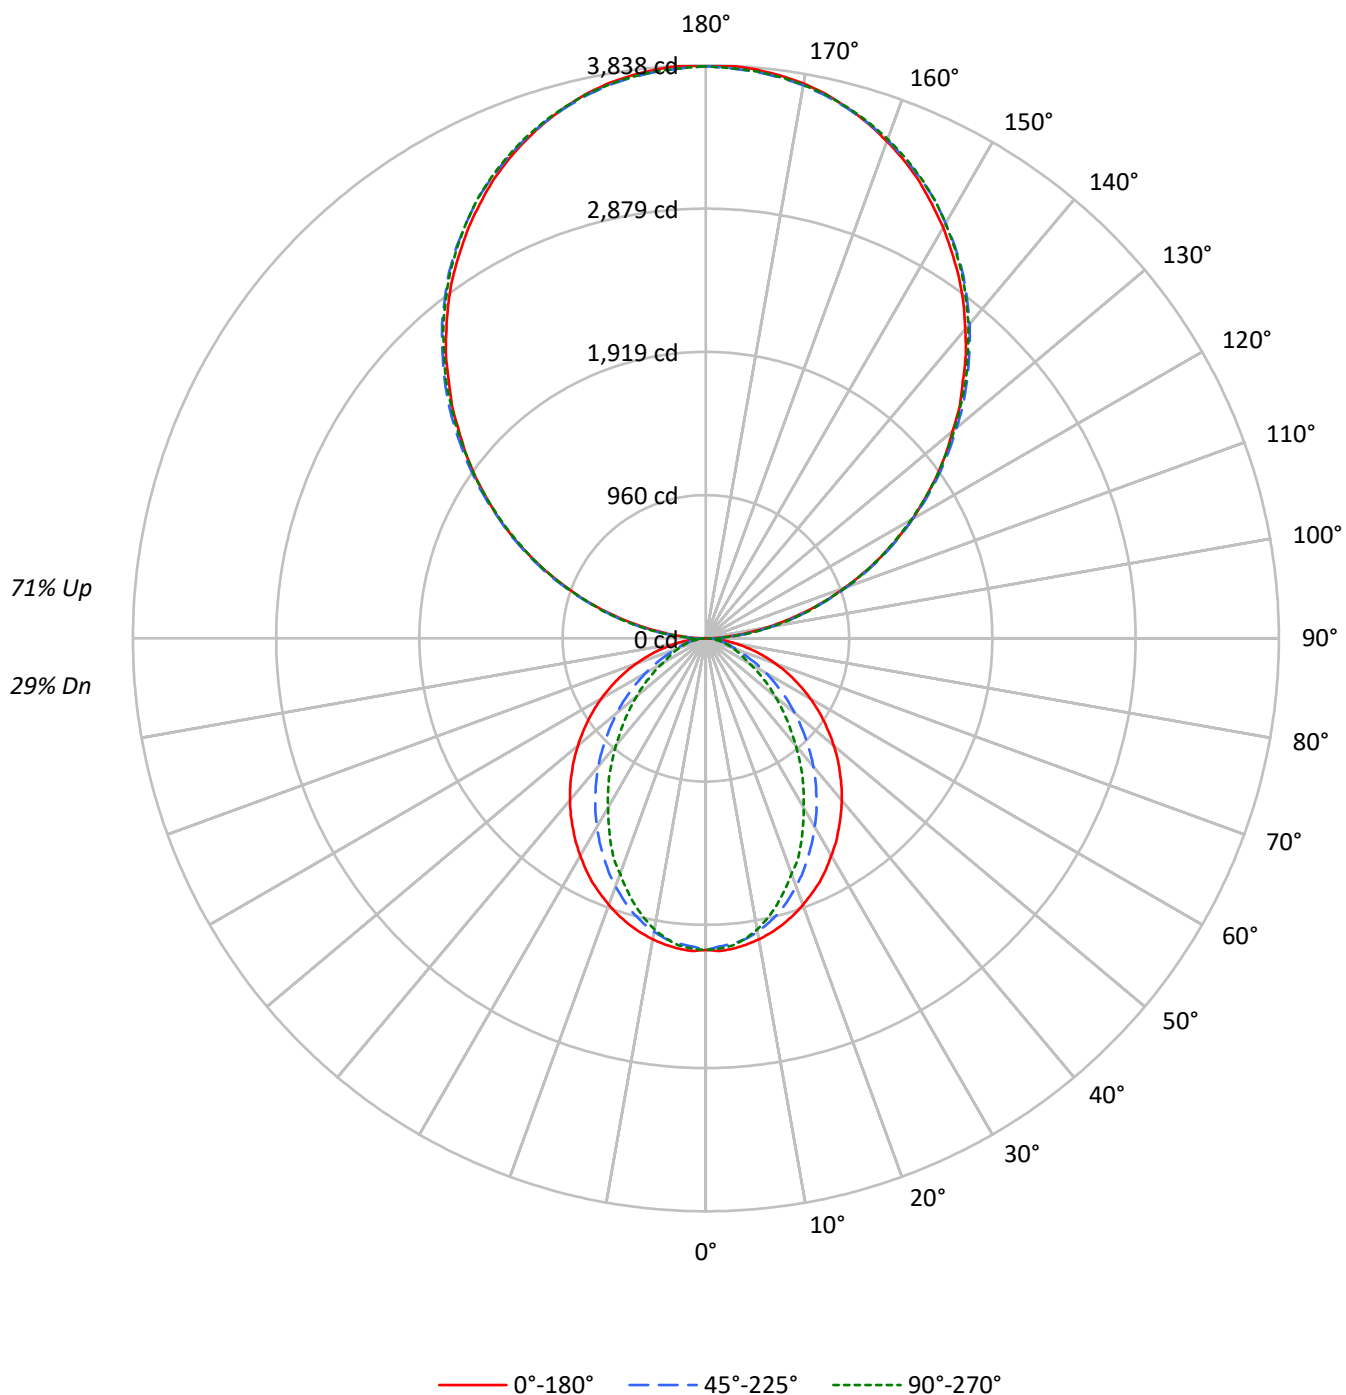

TEST NUMBER: P908670

CATALOG NUMBER: DFN2DIP-PN4F0-050D120US840-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	37	37	37
1	93	89	86	82	83	80	77	74	63	61	59	47	46	45	33	32	31
2	85	78	72	68	76	70	65	61	55	52	49	42	40	38	29	28	27
3	78	69	62	56	69	62	56	51	49	45	42	37	34	32	26	24	23
4	71	61	54	48	64	55	49	44	44	39	36	33	30	28	23	22	20
5	65	54	47	41	58	49	42	38	39	34	31	30	27	24	21	19	18
6	60	49	41	36	54	44	37	33	35	30	27	27	24	21	19	17	16
7	56	44	36	31	50	40	33	29	32	27	24	25	21	19	18	16	14
8	52	40	32	27	46	36	30	25	29	24	21	22	19	17	16	14	13
9	48	36	29	24	43	33	27	22	27	22	19	21	17	15	15	13	11
10	45	33	26	22	40	30	24	20	24	20	17	19	16	14	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1523	1523	1523
5°	1526	1499	1509
10°	1511	1470	1460
15°	1490	1422	1385
20°	1462	1355	1292
25°	1434	1280	1202
30°	1396	1203	1088
35°	1359	1121	988
40°	1322	1035	873
45°	1278	940	769
50°	1232	844	667
55°	1185	742	570
60°	1130	635	469
65°	1067	526	423
70°	991	424	383
75°	895	375	349
80°	756	315	303
85°	527	212	230

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 3002 cd/sqm

TEST NUMBER: P908670

CATALOG NUMBER: DFN2DIP-PN4F0-050D120US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.6	1.3
10°-20°	536.9	3.6
20°-30°	753.8	5.0
30°-40°	821.7	5.5
40°-50°	755.2	5.0
50°-60°	593.1	3.9
60°-70°	386.1	2.6
70°-80°	198.7	1.3
80°-90°	61.6	0.4
90°-100°	237.2	1.6
100°-110°	753.5	5.0
110°-120°	1289.5	8.6
120°-130°	1696.0	11.3
130°-140°	1903.6	12.7
140°-150°	1866.7	12.4
150°-160°	1565.9	10.4
160°-170°	1038.5	6.9
170°-180°	363.0	2.4
0°-30°	1486.3	9.9
0°-40°	2308.0	15.4
0°-60°	3656.4	24.3
0°-90°	4302.8	28.7
90°-120°	2280.2	15.2
90°-150°	7746.5	51.6
90°-180°	10714.0	71.3
0°-180°	15016.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2087	2087	2087	2087	2087	
5°	2087	2078	2053	2070	2064	198
15°	1985	1964	1900	1864	1845	559
25°	1802	1741	1617	1539	1511	829
35°	1552	1456	1290	1171	1129	972
45°	1269	1143	944	810	765	980
55°	965	818	614	500	465	862
65°	652	499	329	264	259	646
75°	348	215	151	138	136	368
85°	81	42	36	36	36	93
90°	3	42	113	106	110	15
95°	169	201	207	207	201	188
105°	696	705	712	718	718	734
115°	1294	1313	1307	1303	1294	1280
125°	1882	1911	1902	1892	1888	1682
135°	2434	2470	2477	2474	2465	1882
145°	2956	2979	2997	3001	2988	1847
155°	3380	3389	3399	3416	3405	1556
165°	3677	3673	3673	3696	3680	1037
175°	3826	3816	3810	3832	3813	363
180°	3832	3832	3832	3832	3832	

TEST NUMBER: P908670

CATALOG NUMBER: DFN2DIP-PN4F0-050D120US840-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2086.9	2086.9	2086.9	2086.9	2086.9
2.5°	2096.3	2086.9	2066.1	2085.1	2081.2
5°	2086.9	2077.5	2052.9	2069.8	2064.3
7.5°	2069.8	2058.6	2032.2	2039.6	2030.1
10°	2047.2	2034.0	1996.3	1990.5	1979.2
12.5°	2018.9	2002.0	1950.9	1939.6	1918.7
15°	1984.9	1964.1	1900.0	1864.1	1845.2
17.5°	1945.2	1915.0	1835.6	1794.1	1763.8
20°	1900.0	1862.1	1767.7	1720.6	1678.9
22.5°	1850.9	1807.4	1697.8	1633.7	1605.4
25°	1801.7	1741.2	1616.6	1539.2	1510.8
27.5°	1743.2	1678.9	1541.1	1452.3	1408.9
30°	1680.9	1609.0	1457.9	1361.7	1310.6
32.5°	1620.4	1533.5	1378.8	1265.4	1218.1
35°	1552.5	1456.1	1290.0	1170.9	1129.3
37.5°	1486.3	1382.4	1206.9	1076.4	1029.4
40°	1416.4	1303.2	1119.8	985.8	936.8
42.5°	1344.7	1223.9	1033.1	893.2	846.2
45°	1269.2	1142.6	944.3	810.1	764.8
47.5°	1197.4	1063.4	859.4	725.2	683.7
50°	1118.1	984.0	776.3	645.8	606.3
52.5°	1040.6	898.9	696.9	572.3	536.4
55°	965.0	817.7	613.7	500.5	464.6
57.5°	887.7	736.6	540.2	434.4	404.1
60°	808.3	657.2	462.6	366.5	336.2
62.5°	730.9	579.9	396.6	306.0	290.9
65°	651.6	498.6	328.6	264.5	258.7
67.5°	576.0	423.0	264.5	232.3	226.6
70°	496.8	349.4	219.0	200.2	192.6
72.5°	421.2	281.3	183.2	168.1	164.3
75°	347.5	215.2	151.1	137.8	136.0
77.5°	273.9	152.9	119.1	111.4	107.6
80°	205.8	109.6	90.6	83.1	83.1
82.5°	143.5	73.7	62.3	58.5	58.5
85°	81.2	41.5	35.9	35.9	35.9
87.5°	30.3	15.0	15.0	13.2	13.2
90°	3.4	41.6	113.2	106.3	109.8
92.5°	71.6	97.0	100.5	104.0	104.0
95°	168.6	201.1	206.8	206.8	201.1
97.5°	280.7	310.8	323.6	323.6	323.6
100°	410.2	436.8	446.0	446.0	442.5
102.5°	546.5	566.1	578.9	582.4	578.9
105°	695.6	704.8	711.8	717.5	717.5
107.5°	843.4	857.4	857.4	859.6	843.4
110°	986.7	1005.2	1005.2	1005.2	996.0



TEST NUMBER: P908670

CATALOG NUMBER: DFN2DIP-PN4F0-050D120US840-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1141.6	1161.2	1157.7	1148.5	1141.6
115°	1294.0	1312.6	1306.8	1303.3	1294.0
117.5°	1445.4	1470.9	1454.7	1445.4	1436.2
120°	1598.0	1623.4	1598.0	1598.0	1587.6
122.5°	1736.7	1769.0	1752.8	1743.5	1736.7
125°	1882.2	1911.1	1901.9	1891.5	1887.9
127.5°	2024.4	2060.1	2047.4	2033.6	2024.4
130°	2157.2	2198.8	2193.0	2186.1	2173.3
132.5°	2306.2	2338.6	2340.9	2324.7	2315.5
135°	2434.5	2470.3	2477.3	2473.8	2464.6
137.5°	2577.8	2606.7	2612.4	2610.1	2596.3
140°	2703.7	2732.6	2748.8	2748.8	2736.0
142.5°	2833.2	2862.1	2871.2	2874.7	2862.1
145°	2955.6	2978.7	2997.2	3000.7	2988.0
147.5°	3065.3	3094.2	3108.2	3113.9	3101.2
150°	3178.7	3198.2	3211.0	3221.4	3211.0
152.5°	3279.1	3298.7	3315.0	3327.7	3315.0
155°	3379.6	3388.9	3399.3	3415.5	3405.1
157.5°	3466.4	3473.2	3479.0	3502.1	3486.0
160°	3543.7	3550.7	3554.1	3573.8	3559.9
162.5°	3615.3	3615.3	3618.9	3640.8	3624.6
165°	3676.6	3673.2	3673.2	3696.2	3680.1
167.5°	3732.1	3721.7	3721.7	3744.8	3728.6
170°	3773.7	3764.4	3760.9	3784.1	3764.4
172.5°	3802.5	3793.3	3789.8	3812.9	3793.3
175°	3825.7	3816.4	3809.5	3832.5	3812.9
177.5°	3838.4	3829.1	3822.1	3841.8	3822.1
180°	3832.5	3832.5	3832.5	3832.5	3832.5

TEST NUMBER: P908670

CATALOG NUMBER: DFN2DIP-PN4F0-050D120US840-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.19	6.87	7.32	7.99	9.54	2.16	2.84	3.28	3.95	5.50
	3H	7.86	8.47	9.00	9.59	11.16	3.34	3.94	4.47	5.07	6.63
	4H	8.46	9.04	9.61	10.17	11.74	3.78	4.36	4.92	5.48	7.05
	6H	8.88	9.41	10.03	10.54	12.12	4.09	4.63	5.24	5.75	7.33
	8H	9.00	9.51	10.16	10.65	12.23	4.18	4.69	5.33	5.83	7.40
	12H	9.06	9.54	10.22	10.68	12.27	4.22	4.70	5.38	5.83	7.43
4H	2H	6.19	6.77	7.34	7.90	9.47	2.74	3.31	3.89	4.44	6.01
	3H	8.01	8.49	9.17	9.64	11.22	4.07	4.56	5.23	5.71	7.29
	4H	8.70	9.14	9.86	10.28	11.88	4.62	5.06	5.77	6.20	7.80
	6H	9.21	9.59	10.37	10.75	12.34	5.03	5.41	6.19	6.57	8.16
	8H	9.38	9.74	10.55	10.89	12.50	5.15	5.51	6.32	6.66	8.27
	12H	9.47	9.79	10.65	10.96	12.57	5.21	5.53	6.39	6.70	8.31
8H	4H	8.66	9.01	9.82	10.16	11.77	4.89	5.24	6.05	6.39	8.00
	6H	9.22	9.51	10.40	10.71	12.31	5.40	5.69	6.58	6.89	8.49
	8H	9.44	9.69	10.63	10.87	12.49	5.59	5.85	6.78	7.02	8.65
	12H	9.57	9.80	10.76	10.97	12.63	5.71	5.93	6.90	7.10	8.76
12H	4H	8.60	8.92	9.78	10.09	11.70	4.89	5.21	6.06	6.37	7.98
	6H	9.20	9.45	10.38	10.62	12.25	5.45	5.70	6.64	6.88	8.50
	8H	9.41	9.63	10.60	10.81	12.46	5.66	5.88	6.85	7.05	8.71

END OF REPORT