

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908738

Luminaire Tested: DFN2DIP-PN4F0-070D110US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P908738
REPORT IS A COMBINATION OF REPORTS P899742 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-070D110US840-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15839.7 lumens
Efficiency: N/A
Efficacy: 100.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 158.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P908738

CATALOG NUMBER: DFN2DIP-PN4F0-070D110US840-RLLFLL

Luminous Intensity Polar Plot

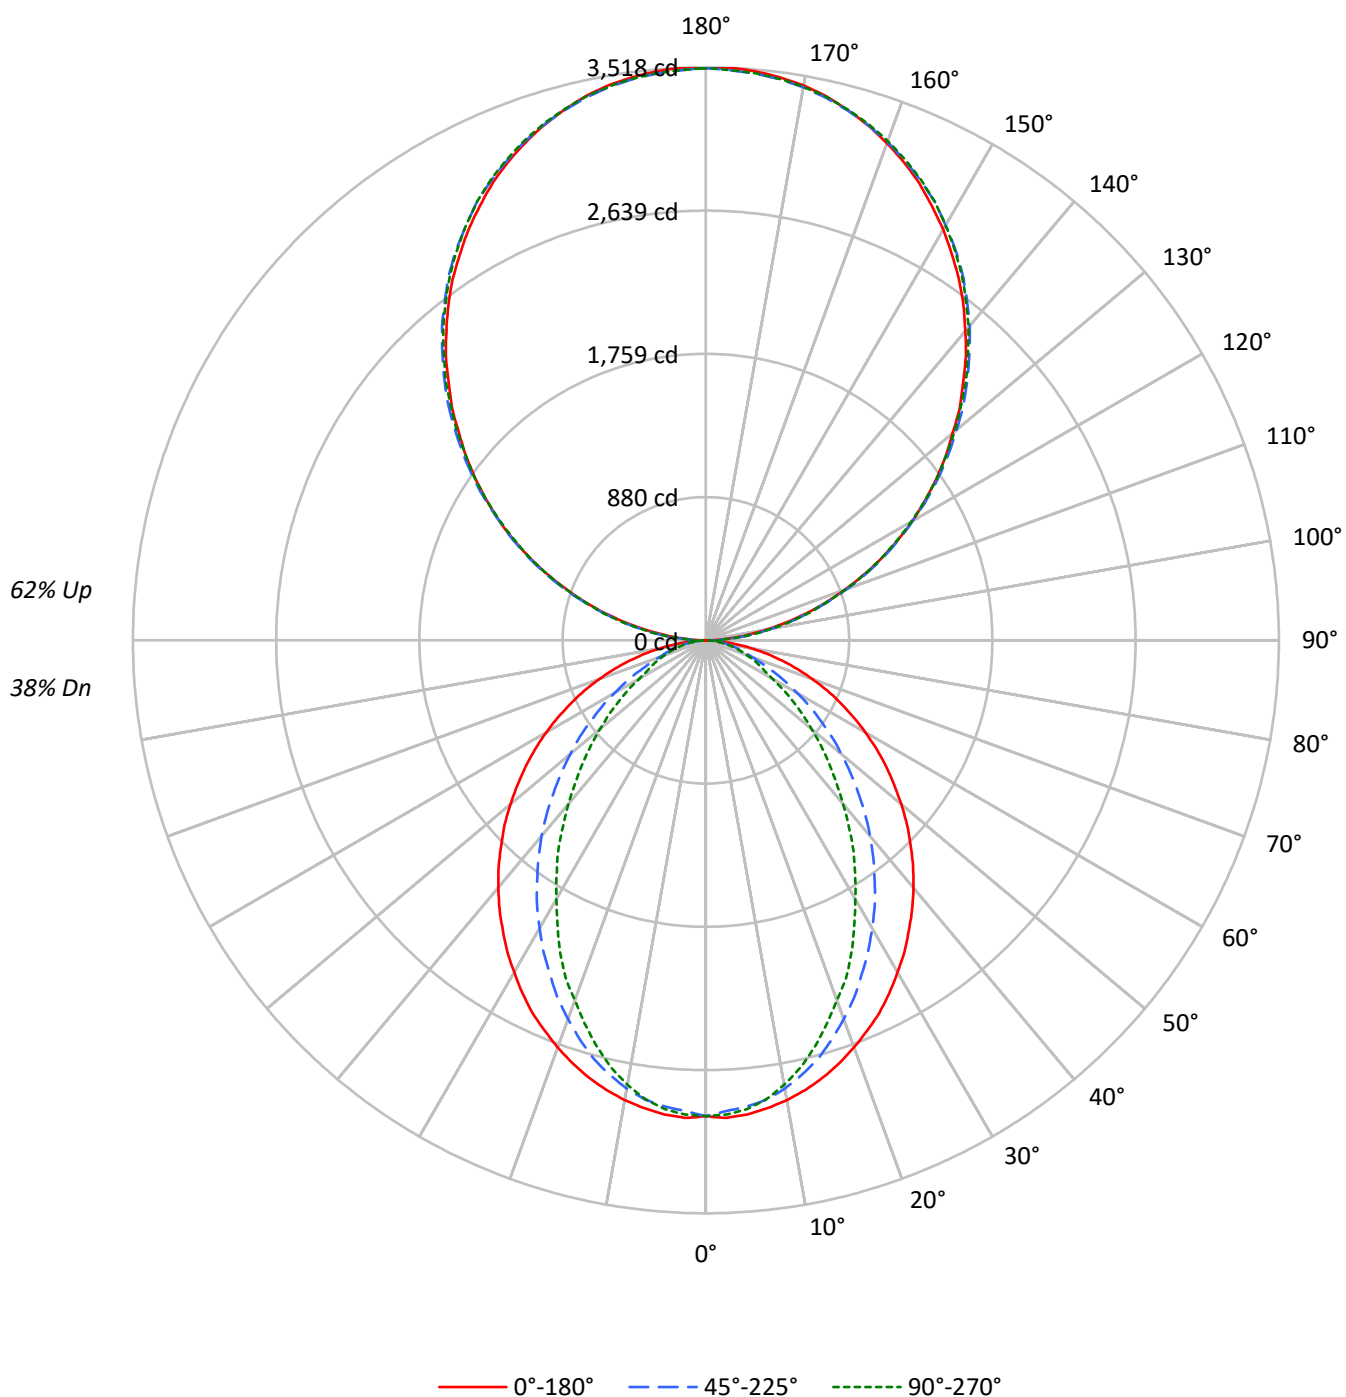

TEST NUMBER: P908738

CATALOG NUMBER: DFN2DIP-PN4F0-070D110US840-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45
1	95	91	88	84	87	83	80	77	68	66	64	53	52	51	40	40	39
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	34	33
3	80	71	64	58	72	65	59	54	53	49	45	42	39	37	32	30	29
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25
5	67	56	48	43	61	51	45	40	42	37	34	34	30	28	26	24	22
6	62	50	43	37	56	46	39	34	38	33	29	31	27	24	24	21	20
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	17
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16
9	49	38	30	26	45	35	28	24	29	24	21	24	20	17	19	16	14
10	46	35	28	23	42	32	26	22	27	22	19	22	18	16	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2133	2133	2133
5°	2136	2099	2113
10°	2115	2058	2044
15°	2086	1990	1938
20°	2047	1897	1808
25°	2008	1792	1683
30°	1955	1684	1523
35°	1903	1569	1383
40°	1850	1449	1222
45°	1789	1316	1077
50°	1725	1182	934
55°	1659	1039	798
60°	1583	889	657
65°	1494	737	592
70°	1387	594	536
75°	1253	524	489
80°	1059	441	425
85°	737	296	322

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2750 cd/sqm

TEST NUMBER: P908738

CATALOG NUMBER: DFN2DIP-PN4F0-070D110US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	273.8	1.7
10°-20°	751.7	4.7
20°-30°	1055.3	6.7
30°-40°	1150.4	7.3
40°-50°	1057.3	6.7
50°-60°	830.4	5.2
60°-70°	540.5	3.4
70°-80°	278.2	1.8
80°-90°	81.0	0.5
90°-100°	217.4	1.4
100°-110°	690.8	4.4
110°-120°	1182.1	7.5
120°-130°	1554.6	9.8
130°-140°	1745.0	11.0
140°-150°	1711.2	10.8
150°-160°	1435.4	9.1
160°-170°	951.9	6.0
170°-180°	332.7	2.1
0°-30°	2080.9	13.1
0°-40°	3231.2	20.4
0°-60°	5118.9	32.3
0°-90°	6018.6	38.0
90°-120°	2090.2	13.2
90°-150°	7101.0	44.8
90°-180°	9821.0	62.0
0°-180°	15839.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2922	2922	2922	2922	2922	
5°	2922	2908	2874	2898	2890	277
15°	2779	2750	2660	2610	2583	783
25°	2522	2438	2263	2155	2115	1160
35°	2173	2038	1806	1639	1581	1360
45°	1777	1600	1322	1134	1071	1372
55°	1351	1145	859	701	651	1207
65°	912	698	460	370	362	904
75°	486	301	212	193	190	515
85°	114	58	50	50	50	130
90°	3	38	104	98	101	16
95°	155	184	190	190	184	172
105°	638	646	652	658	658	673
115°	1186	1203	1198	1195	1186	1173
125°	1725	1752	1743	1734	1731	1542
135°	2232	2264	2271	2268	2259	1725
145°	2709	2730	2747	2751	2739	1693
155°	3098	3106	3116	3131	3121	1426
165°	3370	3367	3367	3388	3373	951
175°	3507	3498	3492	3513	3495	333
180°	3513	3513	3513	3513	3513	

TEST NUMBER: P908738

CATALOG NUMBER: DFN2DIP-PN4F0-070D110US840-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2921.6	2921.6	2921.6	2921.6	2921.6
2.5°	2934.8	2921.6	2892.5	2919.1	2913.8
5°	2921.6	2908.4	2874.0	2897.8	2889.9
7.5°	2897.8	2882.1	2845.1	2855.4	2842.3
10°	2866.1	2847.6	2794.8	2786.7	2771.0
12.5°	2826.5	2802.7	2731.2	2715.4	2686.2
15°	2778.8	2749.7	2659.9	2609.7	2583.3
17.5°	2723.3	2681.0	2569.9	2511.7	2469.4
20°	2659.9	2606.9	2474.8	2408.8	2350.5
22.5°	2591.2	2530.3	2376.8	2287.0	2247.6
25°	2522.4	2437.7	2263.2	2155.0	2115.2
27.5°	2440.5	2350.5	2157.5	2033.3	1972.4
30°	2353.3	2252.6	2041.0	1906.4	1834.9
32.5°	2268.6	2146.9	1930.3	1771.5	1705.3
35°	2173.4	2038.5	1806.0	1639.4	1581.0
37.5°	2080.9	1935.3	1689.6	1506.9	1441.1
40°	1983.0	1824.5	1567.8	1380.2	1311.4
42.5°	1882.6	1713.4	1446.3	1250.5	1184.7
45°	1776.9	1599.5	1322.1	1134.2	1070.8
47.5°	1676.4	1488.7	1203.2	1015.2	957.2
50°	1565.3	1377.7	1086.7	904.1	848.9
52.5°	1456.7	1258.4	975.6	801.1	750.9
55°	1351.0	1144.8	859.2	700.7	650.6
57.5°	1242.7	1031.2	756.3	608.1	565.8
60°	1131.7	920.1	647.7	513.1	470.7
62.5°	1023.3	811.8	555.1	428.4	407.3
65°	912.2	697.9	460.1	370.3	362.1
67.5°	806.5	592.2	370.3	325.1	317.3
70°	695.4	489.2	306.6	280.2	269.5
72.5°	589.7	393.8	256.4	235.4	230.0
75°	486.5	301.2	211.5	193.0	190.5
77.5°	383.4	214.0	166.6	155.9	150.7
80°	288.1	153.4	126.8	116.4	116.4
82.5°	200.9	103.2	87.3	81.9	81.9
85°	113.6	58.1	50.2	50.2	50.2
87.5°	42.3	21.0	21.0	18.5	18.5
90°	3.1	38.2	103.8	97.5	100.6
92.5°	65.6	89.0	92.1	95.3	95.3
95°	154.6	184.3	189.6	189.6	184.3
97.5°	257.4	284.9	296.6	296.6	296.6
100°	376.0	400.3	408.8	408.8	405.7
102.5°	501.0	519.0	530.7	533.8	530.7
105°	637.6	646.1	652.5	657.7	657.7
107.5°	773.2	785.9	785.9	788.0	773.2
110°	904.5	921.5	921.5	921.5	913.0

TEST NUMBER: P908738

CATALOG NUMBER: DFN2DIP-PN4F0-070D110US840-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1046.4	1064.4	1061.3	1052.8	1046.4
115°	1186.3	1203.2	1197.9	1194.8	1186.3
117.5°	1325.0	1348.3	1333.4	1325.0	1316.6
120°	1464.8	1488.1	1464.8	1464.8	1455.3
122.5°	1592.0	1621.5	1606.7	1598.2	1592.0
125°	1725.4	1751.8	1743.3	1733.8	1730.6
127.5°	1855.6	1888.4	1876.8	1864.1	1855.6
130°	1977.4	2015.6	2010.2	2003.9	1992.3
132.5°	2114.1	2143.7	2145.9	2131.0	2122.5
135°	2231.6	2264.4	2270.8	2267.7	2259.2
137.5°	2363.0	2389.4	2394.7	2392.6	2380.0
140°	2478.4	2504.9	2519.7	2519.7	2508.1
142.5°	2597.1	2623.5	2632.0	2635.1	2623.5
145°	2709.3	2730.5	2747.4	2750.6	2739.0
147.5°	2810.0	2836.4	2849.1	2854.4	2842.8
150°	2913.8	2931.7	2943.4	2952.9	2943.4
152.5°	3005.9	3023.8	3038.7	3050.4	3038.7
155°	3098.1	3106.4	3116.0	3130.9	3121.3
157.5°	3177.4	3183.8	3189.1	3210.3	3195.4
160°	3248.4	3254.8	3257.9	3276.0	3263.3
162.5°	3314.1	3314.1	3317.3	3337.4	3322.6
165°	3370.2	3367.0	3367.0	3388.2	3373.4
167.5°	3421.0	3411.5	3411.5	3432.7	3417.9
170°	3459.2	3450.7	3447.6	3468.7	3450.7
172.5°	3485.7	3477.2	3474.0	3495.2	3477.2
175°	3506.9	3498.4	3492.0	3513.2	3495.2
177.5°	3518.5	3510.0	3503.6	3521.7	3503.6
180°	3513.2	3513.2	3513.2	3513.2	3513.2

TEST NUMBER: P908738

CATALOG NUMBER: DFN2DIP-PN4F0-070D110US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.55	9.29	9.61	10.35	11.78	4.51	5.25	5.57	6.31	7.75
	3H	10.22	10.88	11.29	11.95	13.41	5.70	6.36	6.76	7.43	8.88
	4H	10.83	11.46	11.91	12.53	13.99	6.14	6.77	7.22	7.84	9.30
	6H	11.25	11.82	12.34	12.90	14.37	6.46	7.04	7.55	8.11	9.58
	8H	11.37	11.92	12.47	13.01	14.48	6.55	7.10	7.64	8.19	9.65
	12H	11.43	11.95	12.53	13.04	14.53	6.59	7.11	7.69	8.19	9.68
4H	2H	8.56	9.18	9.64	10.25	11.71	5.10	5.73	6.19	6.80	8.26
	3H	10.38	10.90	11.47	12.00	13.47	6.44	6.96	7.54	8.06	9.53
	4H	11.07	11.55	12.17	12.64	14.13	6.99	7.47	8.09	8.55	10.05
	6H	11.58	11.99	12.69	13.10	14.59	7.40	7.81	8.51	8.92	10.41
	8H	11.76	12.14	12.86	13.24	14.75	7.53	7.91	8.64	9.02	10.52
	12H	11.85	12.20	12.97	13.31	14.82	7.59	7.94	8.71	9.05	10.56
8H	4H	11.03	11.41	12.14	12.52	14.02	7.26	7.65	8.37	8.75	10.25
	6H	11.60	11.91	12.73	13.06	14.56	7.78	8.09	8.91	9.24	10.74
	8H	11.82	12.09	12.95	13.22	14.74	7.97	8.25	9.10	9.37	10.89
	12H	11.95	12.20	13.09	13.32	14.87	8.09	8.33	9.22	9.45	11.01
12H	4H	10.98	11.33	12.10	12.44	13.95	7.26	7.61	8.39	8.72	10.23
	6H	11.57	11.85	12.71	12.97	14.49	7.83	8.11	8.96	9.23	10.75
	8H	11.79	12.03	12.93	13.16	14.71	8.04	8.28	9.17	9.40	10.96

END OF REPORT