

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908843

Luminaire Tested: DFN2DIP-PN4F0-100D100US840-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P908843
REPORT IS A COMBINATION OF REPORTS P901250 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-100D100US840-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 18581.5 lumens
Efficiency: N/A
Efficacy: 105.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 175.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P908843

CATALOG NUMBER: DFN2DIP-PN4F0-100D100US840-RLLONL

Luminous Intensity Polar Plot

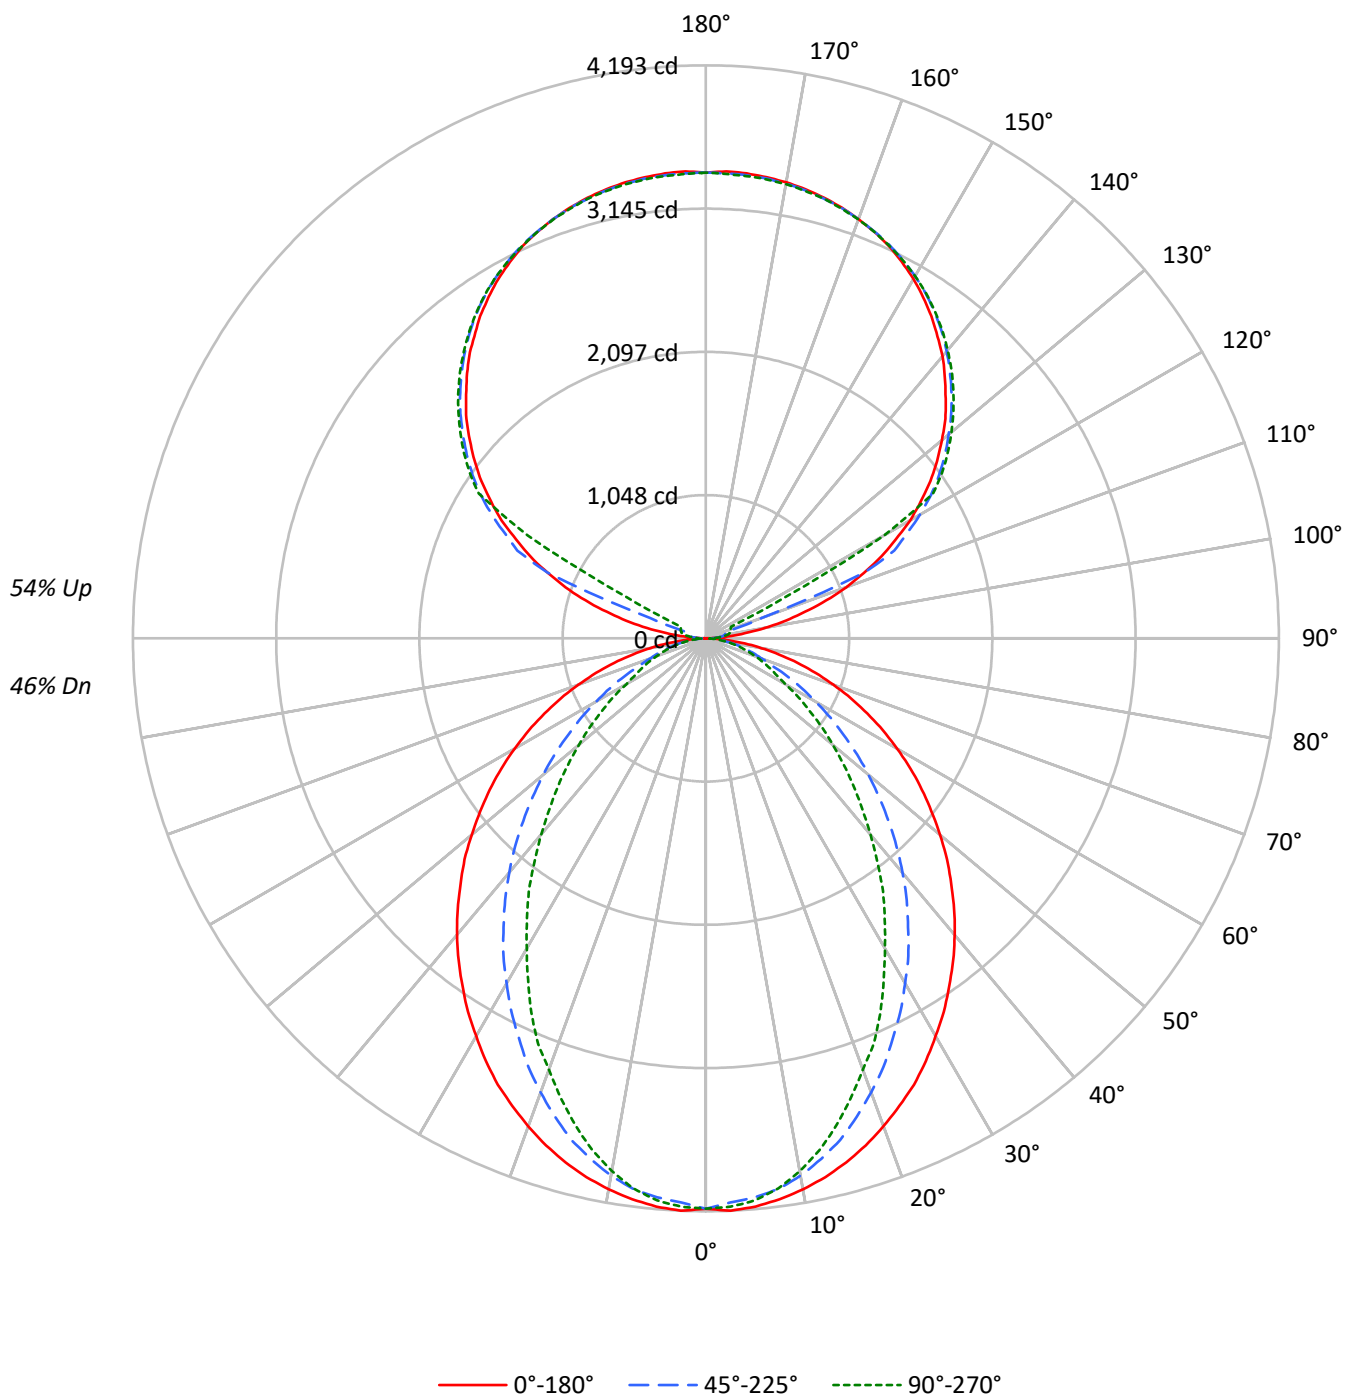

TEST NUMBER: P908843

CATALOG NUMBER: DFN2DIP-PN4F0-100D100US840-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53			46
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45			40
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39			34
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34			29
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29			26
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26			23
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23			20
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21			18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19			16
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17			15
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15			13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3047	3047	3047
5°	3052	2999	3018
10°	3021	2940	2920
15°	2980	2843	2769
20°	2925	2710	2583
25°	2868	2560	2404
30°	2793	2406	2176
35°	2718	2241	1976
40°	2643	2070	1746
45°	2555	1881	1538
50°	2465	1689	1335
55°	2370	1484	1139
60°	2261	1270	938
65°	2135	1052	845
70°	1982	849	766
75°	1790	749	698
80°	1512	630	607
85°	1053	423	460

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2555 cd/sqm

TEST NUMBER: P908843

CATALOG NUMBER: DFN2DIP-PN4F0-100D100US840-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	391.2	2.1
10°-20°	1073.8	5.8
20°-30°	1507.6	8.1
30°-40°	1643.4	8.8
40°-50°	1510.5	8.1
50°-60°	1186.3	6.4
60°-70°	772.1	4.2
70°-80°	397.5	2.1
80°-90°	107.5	0.6
90°-100°	112.4	0.6
100°-110°	418.9	2.3
110°-120°	1111.1	6.0
120°-130°	1842.9	9.9
130°-140°	1957.5	10.5
140°-150°	1819.3	9.8
150°-160°	1462.7	7.9
160°-170°	942.5	5.1
170°-180°	324.4	1.7
0°-30°	2972.6	16.0
0°-40°	4616.1	24.8
0°-60°	7312.8	39.4
0°-90°	8589.8	46.2
90°-120°	1642.4	8.8
90°-150°	7262.1	39.1
90°-180°	9992.0	53.8
0°-180°	18581.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4174	4174	4174	4174	4174	
5°	4174	4155	4106	4140	4128	396
15°	3970	3928	3800	3728	3690	1119
25°	3604	3482	3233	3078	3022	1657
35°	3105	2912	2580	2342	2259	1943
45°	2538	2285	1889	1620	1530	1960
55°	1930	1636	1228	1001	929	1725
65°	1303	997	657	529	517	1292
75°	695	430	302	276	272	735
85°	162	83	72	72	72	186
90°	2	30	49	62	66	17
95°	160	79	96	109	106	190
105°	750	824	151	177	187	801
115°	1418	1460	1522	380	202	1396
125°	2005	2037	2084	2101	2108	1788
135°	2481	2520	2542	2567	2562	1916
145°	2878	2876	2917	2935	2922	1800
155°	3169	3147	3176	3191	3172	1460
165°	3339	3324	3332	3349	3332	943
175°	3416	3398	3403	3420	3396	325
180°	3408	3408	3408	3408	3408	

TEST NUMBER: P908843

CATALOG NUMBER: DFN2DIP-PN4F0-100D100US840-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4173.8	4173.8	4173.8	4173.8	4173.8
2.5°	4192.6	4173.8	4132.1	4170.1	4162.6
5°	4173.8	4154.9	4105.6	4139.7	4128.4
7.5°	4139.7	4117.2	4064.3	4079.1	4060.4
10°	4094.4	4067.9	3992.6	3981.0	3958.6
12.5°	4037.9	4003.8	3901.6	3879.2	3837.5
15°	3969.8	3928.1	3799.8	3728.1	3690.5
17.5°	3890.4	3829.9	3671.3	3588.3	3527.8
20°	3799.8	3724.1	3535.3	3441.2	3357.8
22.5°	3701.7	3614.7	3395.5	3267.3	3210.8
25°	3603.5	3482.5	3233.2	3078.5	3021.6
27.5°	3486.5	3357.8	3082.1	2904.6	2817.6
30°	3361.8	3217.9	2915.8	2723.5	2621.3
32.5°	3240.9	3066.9	2757.5	2530.7	2436.1
35°	3104.9	2912.3	2580.0	2342.0	2258.6
37.5°	2972.7	2764.7	2413.7	2152.8	2058.6
40°	2832.9	2606.5	2239.8	1971.7	1873.5
42.5°	2689.4	2447.7	2066.3	1786.6	1692.3
45°	2538.3	2285.0	1888.8	1620.2	1529.6
47.5°	2394.9	2126.8	1718.8	1450.3	1367.4
50°	2236.1	1968.0	1552.5	1291.6	1212.6
52.5°	2081.0	1797.8	1393.8	1144.5	1072.8
55°	1930.0	1635.5	1227.5	1001.1	929.3
57.5°	1775.3	1473.1	1080.5	868.8	808.3
60°	1616.6	1314.4	925.3	733.0	672.5
62.5°	1461.9	1159.7	793.0	612.0	581.9
65°	1303.2	997.0	657.2	529.0	517.4
67.5°	1152.2	846.0	529.0	464.4	453.2
70°	993.4	698.9	438.0	400.3	385.2
72.5°	842.3	562.6	366.3	336.2	328.6
75°	694.9	430.4	302.2	275.7	272.1
77.5°	547.9	305.8	238.0	222.8	215.2
80°	411.5	219.2	181.2	166.3	166.3
82.5°	286.9	147.4	124.6	117.0	117.0
85°	162.3	82.9	71.7	71.7	71.7
87.5°	60.5	30.1	30.1	26.5	26.5
90°	2.3	29.6	49.2	61.8	66.4
92.5°	61.8	51.8	59.2	64.1	66.4
95°	160.2	78.8	96.0	108.7	106.0
97.5°	288.4	86.3	125.6	133.2	135.6
100°	436.7	98.7	140.6	160.2	165.2
102.5°	599.2	594.5	145.5	172.5	180.1
105°	749.7	823.7	150.6	177.4	187.4
107.5°	924.8	986.3	155.5	182.5	192.4
110°	1092.6	1144.2	431.6	185.1	194.7



TEST NUMBER: P908843

CATALOG NUMBER: DFN2DIP-PN4F0-100D100US840-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1250.4	1294.6	1252.8	189.8	197.4
115°	1418.0	1459.9	1521.7	379.8	202.4
117.5°	1563.5	1612.8	1654.9	1302.0	656.0
120°	1726.4	1763.2	1807.8	1837.3	1504.4
122.5°	1864.3	1903.8	1953.3	1967.9	1970.6
125°	2004.9	2037.1	2084.0	2101.2	2108.5
127.5°	2133.1	2167.7	2204.8	2229.5	2231.8
130°	2254.0	2293.6	2320.6	2347.7	2345.4
132.5°	2377.3	2409.5	2436.5	2458.7	2456.4
135°	2481.0	2520.5	2542.5	2567.4	2562.4
137.5°	2589.4	2619.0	2643.8	2668.5	2661.1
140°	2695.3	2715.3	2742.2	2764.5	2752.2
142.5°	2784.4	2801.7	2833.6	2853.2	2841.0
145°	2878.1	2875.5	2917.4	2934.7	2922.3
147.5°	2959.2	2951.9	2993.7	3006.1	2996.5
150°	3038.3	3021.0	3060.6	3075.2	3062.9
152.5°	3104.7	3085.1	3122.1	3136.9	3119.7
155°	3169.0	3146.9	3176.5	3191.2	3171.6
157.5°	3220.8	3201.2	3223.4	3240.7	3220.8
160°	3265.3	3250.4	3265.3	3279.9	3262.7
162.5°	3304.5	3289.8	3302.2	3319.4	3297.2
165°	3339.0	3324.4	3331.7	3349.0	3331.7
167.5°	3366.3	3351.3	3359.0	3376.3	3354.0
170°	3388.5	3373.7	3378.6	3395.9	3373.7
172.5°	3403.1	3388.5	3393.6	3410.8	3388.5
175°	3415.5	3398.2	3403.1	3420.5	3395.9
177.5°	3420.5	3403.1	3405.9	3423.1	3400.8
180°	3408.2	3408.2	3408.2	3408.2	3408.2

TEST NUMBER: P908843

CATALOG NUMBER: DFN2DIP-PN4F0-100D100US840-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.66	11.46	11.66	12.46	13.79	6.63	7.43	7.62	8.43	9.76
	3H	12.34	13.06	13.35	14.07	15.41	7.81	8.53	8.82	9.54	10.89
	4H	12.95	13.63	13.97	14.64	16.00	8.26	8.94	9.28	9.95	11.31
	6H	13.37	13.99	14.40	15.01	16.38	8.58	9.21	9.61	10.23	11.59
	8H	13.50	14.09	14.53	15.13	16.49	8.67	9.27	9.71	10.30	11.66
	12H	13.56	14.12	14.60	15.15	16.54	8.72	9.28	9.76	10.31	11.70
4H	2H	10.68	11.35	11.70	12.37	13.72	7.22	7.90	8.24	8.91	10.27
	3H	12.51	13.07	13.54	14.11	15.48	8.57	9.13	9.60	10.17	11.54
	4H	13.20	13.71	14.24	14.75	16.14	9.12	9.63	10.16	10.67	12.06
	6H	13.72	14.16	14.77	15.22	16.60	9.53	9.98	10.58	11.03	12.42
	8H	13.89	14.30	14.94	15.35	16.76	9.66	10.08	10.71	11.13	12.53
	12H	13.99	14.36	15.06	15.42	16.83	9.73	10.10	10.80	11.17	12.57
8H	4H	13.16	13.58	14.22	14.63	16.03	9.40	9.81	10.45	10.86	12.26
	6H	13.73	14.07	14.81	15.17	16.57	9.91	10.25	10.99	11.35	12.75
	8H	13.95	14.25	15.03	15.33	16.75	10.11	10.40	11.19	11.48	12.90
	12H	14.09	14.35	15.18	15.43	16.89	10.22	10.49	11.31	11.56	13.02
12H	4H	13.12	13.49	14.18	14.55	15.96	9.40	9.77	10.47	10.84	12.24
	6H	13.71	14.01	14.79	15.08	16.50	9.96	10.26	11.05	11.34	12.76
	8H	13.93	14.19	15.01	15.26	16.72	10.17	10.44	11.26	11.51	12.97

END OF REPORT