

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911328

Luminaire Tested: DFN2DIP-PN4F0-040D040US850-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P911328  
REPORT IS A COMBINATION OF REPORTS P899609 AND P896497  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-PN4F0-040D040US850-FLLFLL  
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8317.5 lumens  
Efficiency: N/A  
Efficacy: 130.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 63.7  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: 0.9968  
Total Harmonic Distortion (THDi): 0.064  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P911328  
CATALOG NUMBER: DFN2DIP-PN4F0-040D040US850-FLLFLL

### Luminous Intensity Polar Plot

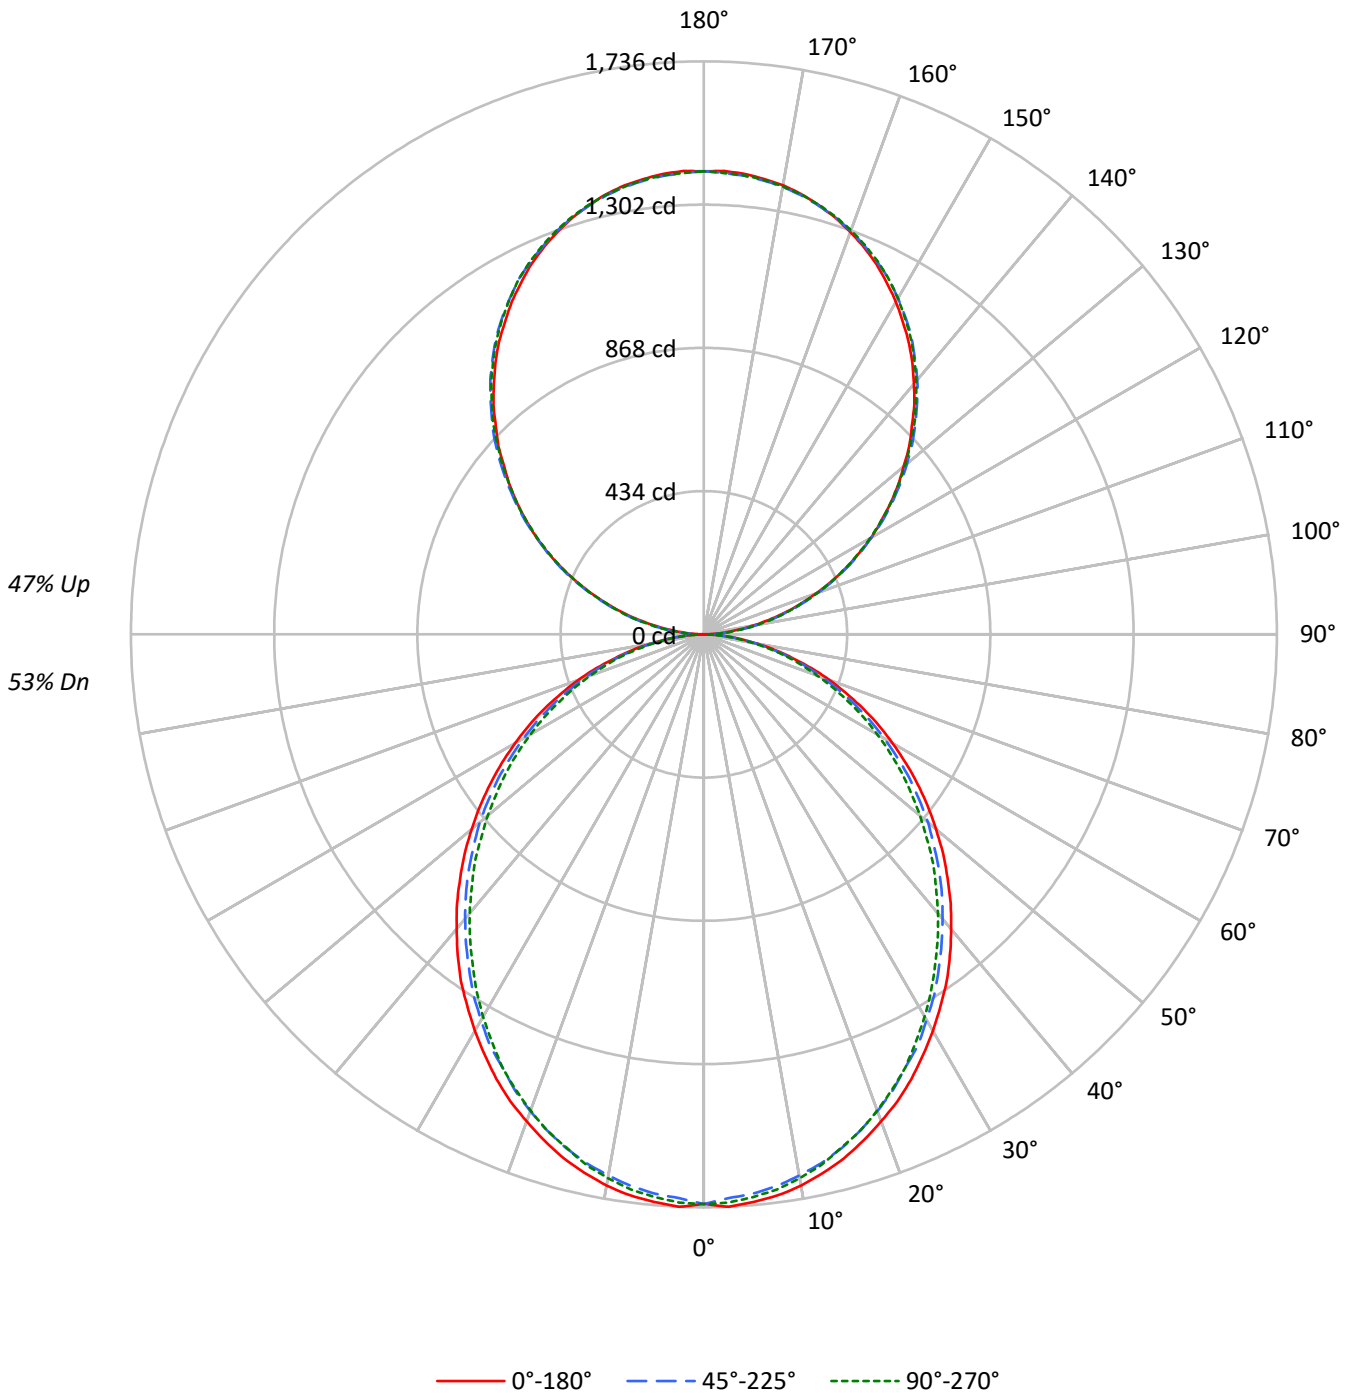



TEST NUMBER: P911328  
 CATALOG NUMBER: DFN2DIP-PN4F0-040D040US850-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	59	59	59	53
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50	52	51	50	45
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	46	44	42	37
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31	36	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27	33	29	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	30	26	24	21
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21	27	24	21	18
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19	25	21	19	16
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	21	18	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1260	1260	1260
5°	1262	1243	1251
10°	1252	1226	1234
15°	1233	1206	1208
20°	1208	1178	1181
25°	1184	1145	1150
30°	1153	1114	1110
35°	1123	1077	1069
40°	1087	1040	1029
45°	1051	1003	988
50°	1012	964	941
55°	970	919	897
60°	924	866	848
65°	873	810	789
70°	808	743	726
75°	718	663	668
80°	610	559	557
85°	441	382	373

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 1096 cd/sqm



TEST NUMBER: P911328

CATALOG NUMBER: DFN2DIP-PN4F0-040D040US850-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	162.5	2.0
10°-20°	457.1	5.5
20°-30°	671.7	8.1
30°-40°	780.2	9.4
40°-50°	779.2	9.4
50°-60°	679.5	8.2
60°-70°	502.3	6.0
70°-80°	284.2	3.4
80°-90°	79.0	0.9
90°-100°	86.8	1.0
100°-110°	275.8	3.3
110°-120°	472.0	5.7
120°-130°	620.8	7.5
130°-140°	696.8	8.4
140°-150°	683.3	8.2
150°-160°	573.2	6.9
160°-170°	380.1	4.6
170°-180°	132.9	1.6
0°-30°	1291.3	15.5
0°-40°	2071.5	24.9
0°-60°	3530.2	42.4
0°-90°	4395.6	52.8
90°-120°	834.7	10.0
90°-150°	2835.6	34.1
90°-180°	3922.0	47.2
0°-180°	8317.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1726	1726	1726	1726	1726	
5°	1726	1720	1701	1714	1711	164
15°	1643	1633	1612	1618	1610	463
25°	1487	1474	1446	1449	1446	684
35°	1283	1266	1240	1230	1222	801
45°	1044	1032	1007	989	983	806
55°	790	780	760	740	732	706
65°	533	523	506	491	483	527
75°	279	276	267	257	261	298
85°	68	66	65	60	58	76
90°	1	15	42	39	40	8
95°	62	74	76	76	74	69
105°	255	258	260	263	263	269
115°	474	480	478	477	474	469
125°	689	700	696	692	691	616
135°	891	904	907	906	902	689
145°	1082	1090	1097	1098	1094	676
155°	1237	1240	1244	1250	1246	569
165°	1346	1345	1345	1353	1347	380
175°	1400	1397	1394	1403	1396	133
180°	1403	1403	1403	1403	1403	



TEST NUMBER: P911328

CATALOG NUMBER: DFN2DIP-PN4F0-040D040US850-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1726.0	1726.0	1726.0	1726.0	1726.0
2.5°	1736.1	1727.8	1709.5	1726.0	1722.9
5°	1726.0	1719.5	1701.2	1714.4	1711.3
7.5°	1714.4	1704.5	1686.2	1699.7	1696.3
10°	1696.3	1684.7	1664.8	1678.0	1673.0
12.5°	1671.3	1661.4	1641.5	1649.9	1646.4
15°	1643.1	1633.2	1611.6	1618.3	1610.0
17.5°	1608.3	1598.4	1576.8	1585.0	1576.8
20°	1570.0	1560.1	1537.0	1541.8	1535.4
22.5°	1532.0	1517.0	1495.4	1495.4	1492.0
25°	1487.1	1473.9	1445.7	1448.9	1445.7
27.5°	1437.3	1425.6	1404.2	1399.2	1391.0
30°	1387.6	1374.3	1349.4	1344.4	1337.8
32.5°	1334.5	1324.6	1298.0	1288.0	1281.2
35°	1283.0	1266.5	1239.9	1229.9	1221.6
37.5°	1224.9	1209.9	1183.3	1171.8	1163.5
40°	1165.2	1151.8	1125.2	1110.4	1103.8
42.5°	1107.1	1093.7	1067.3	1050.6	1040.7
45°	1044.0	1032.5	1007.4	989.3	982.6
47.5°	982.6	970.9	944.4	926.1	916.3
50°	917.8	909.5	886.3	863.0	854.7
52.5°	854.7	843.2	821.7	803.4	791.7
55°	790.2	780.1	760.2	740.3	732.1
57.5°	725.3	717.1	695.3	675.5	668.8
60°	660.5	654.0	630.8	612.5	607.5
62.5°	597.5	585.9	569.4	552.7	546.1
65°	532.9	522.8	506.3	491.3	483.1
67.5°	466.4	458.0	443.3	431.6	425.0
70°	405.0	398.4	383.4	371.7	365.2
72.5°	342.0	335.3	327.0	315.4	310.4
75°	278.8	275.6	267.2	257.3	260.6
77.5°	222.4	215.7	212.4	207.4	202.5
80°	166.0	164.2	160.9	156.0	152.7
82.5°	112.9	112.9	111.3	104.6	104.6
85°	68.0	66.4	64.8	59.7	58.1
87.5°	29.9	26.6	23.3	18.3	16.5
90°	1.2	15.2	41.5	38.9	40.1
92.5°	26.2	35.5	36.8	38.0	38.0
95°	61.8	73.6	75.7	75.7	73.6
97.5°	102.8	113.8	118.4	118.4	118.4
100°	150.2	159.9	163.2	163.2	162.0
102.5°	200.1	207.3	211.9	213.1	211.9
105°	254.6	258.0	260.5	262.6	262.6
107.5°	308.7	313.8	313.8	314.6	308.7
110°	361.2	368.0	368.0	368.0	364.6



TEST NUMBER: P911328

CATALOG NUMBER: DFN2DIP-PN4F0-040D040US850-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	417.9	425.1	423.7	420.4	417.9
115°	473.7	480.5	478.3	477.1	473.7
117.5°	529.1	538.4	532.5	529.1	525.8
120°	585.0	594.2	585.0	585.0	581.1
122.5°	635.7	647.5	641.7	638.2	635.7
125°	689.0	699.6	696.2	692.3	691.1
127.5°	741.0	754.1	749.5	744.4	741.0
130°	789.6	804.9	802.8	800.3	795.6
132.5°	844.2	856.0	856.9	850.9	847.6
135°	891.2	904.3	906.8	905.5	902.2
137.5°	943.6	954.2	956.3	955.4	950.4
140°	989.7	1000.3	1006.2	1006.2	1001.5
142.5°	1037.1	1047.7	1051.0	1052.3	1047.7
145°	1081.9	1090.4	1097.1	1098.5	1093.8
147.5°	1122.1	1132.6	1137.7	1139.8	1135.2
150°	1163.6	1170.8	1175.4	1179.2	1175.4
152.5°	1200.4	1207.5	1213.5	1218.1	1213.5
155°	1237.1	1240.5	1244.3	1250.3	1246.4
157.5°	1268.9	1271.4	1273.5	1282.0	1276.0
160°	1297.2	1299.7	1301.0	1308.2	1303.1
162.5°	1323.4	1323.4	1324.7	1332.7	1326.8
165°	1345.9	1344.6	1344.6	1353.0	1347.1
167.5°	1366.2	1362.3	1362.3	1370.8	1364.8
170°	1381.4	1377.9	1376.7	1385.1	1377.9
172.5°	1391.9	1388.6	1387.2	1395.8	1388.6
175°	1400.4	1397.0	1394.5	1402.9	1395.8
177.5°	1405.1	1401.7	1399.1	1406.3	1399.1
180°	1402.9	1402.9	1402.9	1402.9	1402.9



TEST NUMBER: P911328  
 CATALOG NUMBER: DFN2DIP-PN4F0-040D040US850-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.34	9.23	9.27	10.18	11.41	7.90	8.79	8.83	9.74	10.97
	3H	10.01	10.80	10.95	11.76	13.01	9.52	10.32	10.46	11.28	12.53
	4H	10.60	11.35	11.55	12.31	13.58	10.11	10.86	11.07	11.83	13.09
	6H	11.00	11.69	11.97	12.66	13.94	10.51	11.20	11.48	12.17	13.45
	8H	11.11	11.77	12.08	12.75	14.03	10.61	11.27	11.59	12.26	13.53
	12H	11.16	11.79	12.14	12.77	14.06	10.66	11.29	11.64	12.27	13.56
4H	2H	8.81	9.56	9.77	10.52	11.78	8.45	9.21	9.42	10.17	11.43
	3H	10.68	11.31	11.65	12.30	13.57	10.27	10.90	11.25	11.90	13.17
	4H	11.39	11.97	12.38	12.96	14.26	10.98	11.55	11.96	12.54	13.84
	6H	11.91	12.41	12.91	13.42	14.72	11.49	11.98	12.48	12.99	14.29
	8H	12.07	12.53	13.06	13.53	14.84	11.64	12.10	12.63	13.10	14.42
	12H	12.14	12.56	13.16	13.58	14.90	11.70	12.12	12.72	13.14	14.46
8H	4H	11.59	12.06	12.59	13.06	14.37	11.22	11.68	12.22	12.69	14.00
	6H	12.23	12.61	13.25	13.66	14.97	11.85	12.24	12.87	13.28	14.59
	8H	12.45	12.79	13.48	13.82	15.15	12.07	12.40	13.10	13.44	14.77
	12H	12.59	12.88	13.62	13.91	15.28	12.18	12.48	13.22	13.51	14.88
12H	4H	11.58	12.00	12.60	13.02	14.34	11.22	11.64	12.23	12.66	13.97
	6H	12.26	12.60	13.29	13.63	14.96	11.89	12.23	12.92	13.26	14.59
	8H	12.50	12.80	13.54	13.83	15.20	12.13	12.43	13.17	13.46	14.83