

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911358

Luminaire Tested: DFN2DIP-PN4F0-040D110US850-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911358
REPORT IS A COMBINATION OF REPORTS P899736 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-040D110US850-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14566.7 lumens
Efficiency: N/A
Efficacy: 116.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 125
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911358
CATALOG NUMBER: DFN2DIP-PN4F0-040D110US850-RLLFLL

Luminous Intensity Polar Plot

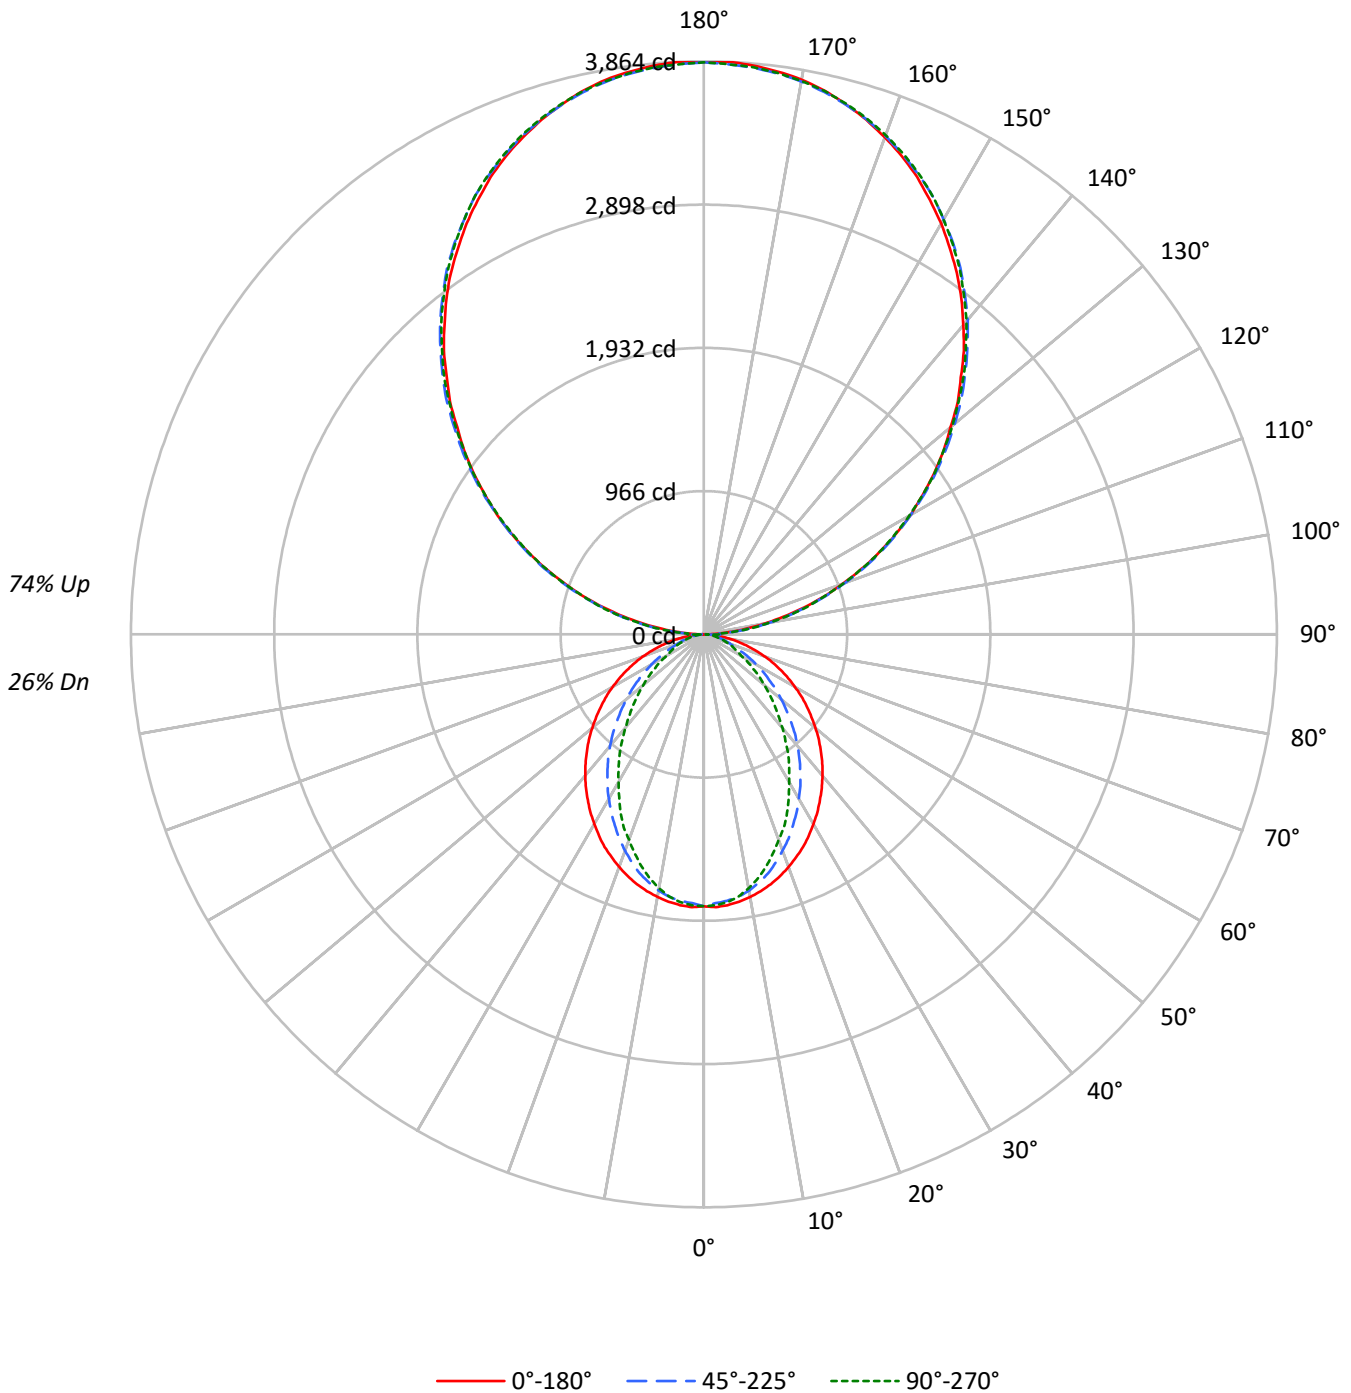



TEST NUMBER: P911358
 CATALOG NUMBER: DFN2DIP-PN4F0-040D110US850-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	101	101	101	101	90	90	90	90	70	70	70	51	51	51	34	34	34	26				26
1	93	89	85	82	82	79	76	73	62	60	58	45	44	43	30	30	29	22				22
2	85	78	72	67	75	69	65	61	54	51	48	40	38	36	27	26	25	19				19
3	77	68	61	56	69	61	55	51	48	44	41	36	33	31	24	23	21	16				16
4	71	61	53	47	63	54	48	43	43	38	35	32	29	27	22	20	19	14				14
5	65	54	46	41	58	48	42	37	38	34	30	29	26	23	20	18	16	13				13
6	60	48	41	35	53	43	37	32	34	30	26	26	23	20	18	16	15	11				11
7	55	43	36	31	49	39	33	28	31	26	23	24	20	18	16	14	13	10				10
8	51	39	32	27	46	36	29	25	28	24	20	21	18	16	15	13	12	9				9
9	47	36	29	24	42	32	26	22	26	21	18	20	17	14	14	12	11	8				8
10	44	33	26	21	40	30	24	20	24	19	16	18	15	13	13	11	10	8				8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1338	1338	1338
5°	1340	1317	1326
10°	1327	1292	1283
15°	1309	1249	1216
20°	1285	1190	1135
25°	1260	1125	1056
30°	1227	1057	956
35°	1194	985	868
40°	1161	909	767
45°	1123	826	676
50°	1083	742	586
55°	1041	652	500
60°	993	558	412
65°	938	462	371
70°	871	373	336
75°	786	329	307
80°	664	276	267
85°	463	186	202

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 3021 cd/sqm



TEST NUMBER: P911358

CATALOG NUMBER: DFN2DIP-PN4F0-040D110US850-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	171.8	1.2
10°-20°	471.7	3.2
20°-30°	662.3	4.5
30°-40°	721.9	5.0
40°-50°	663.5	4.6
50°-60°	521.1	3.6
60°-70°	339.2	2.3
70°-80°	174.6	1.2
80°-90°	55.5	0.4
90°-100°	238.7	1.6
100°-110°	758.6	5.2
110°-120°	1298.1	8.9
120°-130°	1707.2	11.7
130°-140°	1916.3	13.2
140°-150°	1879.1	12.9
150°-160°	1576.3	10.8
160°-170°	1045.4	7.2
170°-180°	365.4	2.5
0°-30°	1305.8	9.0
0°-40°	2027.7	13.9
0°-60°	3212.2	22.1
0°-90°	3781.5	26.0
90°-120°	2295.4	15.8
90°-150°	7798.0	53.5
90°-180°	10785.0	74.0
0°-180°	14566.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1833	1833	1833	1833	1833	
5°	1833	1825	1804	1818	1814	174
15°	1744	1726	1669	1638	1621	491
25°	1583	1530	1420	1352	1327	728
35°	1364	1279	1133	1029	992	854
45°	1115	1004	830	712	672	861
55°	848	718	539	440	408	758
65°	572	438	289	232	227	568
75°	305	189	133	121	120	323
85°	71	36	32	32	32	82
90°	3	42	114	107	110	14
95°	170	202	208	208	202	189
105°	700	710	716	722	722	739
115°	1303	1321	1316	1312	1303	1288
125°	1895	1924	1914	1904	1900	1693
135°	2451	2487	2494	2490	2481	1894
145°	2975	2998	3017	3021	3008	1859
155°	3402	3411	3422	3438	3428	1566
165°	3701	3698	3698	3721	3704	1044
175°	3851	3842	3835	3858	3838	366
180°	3858	3858	3858	3858	3858	



TEST NUMBER: P911358

CATALOG NUMBER: DFN2DIP-PN4F0-040D110US850-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1833.4	1833.4	1833.4	1833.4	1833.4
2.5°	1841.7	1833.4	1815.1	1831.8	1828.4
5°	1833.4	1825.1	1803.5	1818.4	1813.5
7.5°	1818.4	1808.6	1785.4	1791.8	1783.6
10°	1798.6	1786.9	1753.8	1748.7	1738.9
12.5°	1773.7	1758.8	1713.8	1704.0	1685.7
15°	1743.8	1725.5	1669.2	1637.7	1621.1
17.5°	1709.0	1682.4	1612.6	1576.2	1549.6
20°	1669.2	1635.9	1552.9	1511.6	1475.0
22.5°	1626.0	1587.9	1491.5	1435.2	1410.4
25°	1582.9	1529.8	1420.2	1352.3	1327.3
27.5°	1531.5	1475.0	1353.9	1275.9	1237.6
30°	1476.7	1413.5	1280.8	1196.3	1151.5
32.5°	1423.6	1347.2	1211.2	1111.7	1070.1
35°	1364.0	1279.2	1133.3	1028.7	992.1
37.5°	1305.8	1214.5	1060.2	945.6	904.3
40°	1244.4	1144.9	983.9	866.1	823.0
42.5°	1181.3	1075.2	907.6	784.7	743.4
45°	1115.0	1003.8	829.6	711.8	671.9
47.5°	1052.0	934.2	755.0	637.1	600.6
50°	982.2	864.5	681.9	567.4	532.7
52.5°	914.1	789.7	612.3	502.7	471.2
55°	847.8	718.4	539.2	439.7	408.2
57.5°	779.8	647.1	474.5	381.6	355.1
60°	710.1	577.3	406.4	321.9	295.4
62.5°	642.2	509.5	348.3	268.8	255.6
65°	572.5	437.9	288.7	232.3	227.2
67.5°	506.1	371.6	232.3	204.1	199.1
70°	436.4	307.0	192.4	175.9	169.1
72.5°	370.1	247.2	160.9	147.7	144.4
75°	305.2	189.1	132.7	121.1	119.6
77.5°	240.7	134.3	104.6	97.9	94.5
80°	180.8	96.3	79.5	73.1	73.1
82.5°	126.1	64.8	54.8	51.3	51.3
85°	71.3	36.5	31.5	31.5	31.5
87.5°	26.6	13.2	13.2	11.6	11.6
90°	3.4	41.9	114.0	107.0	110.5
92.5°	72.1	97.7	101.1	104.7	104.7
95°	169.8	202.4	208.2	208.2	202.4
97.5°	282.7	312.8	325.7	325.7	325.7
100°	412.9	439.6	448.9	448.9	445.5
102.5°	550.2	569.9	582.8	586.2	582.8
105°	700.2	709.5	716.5	722.3	722.3
107.5°	849.1	863.0	863.0	865.4	849.1
110°	993.3	1012.0	1012.0	1012.0	1002.6



TEST NUMBER: P911358

CATALOG NUMBER: DFN2DIP-PN4F0-040D110US850-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1149.1	1168.9	1165.4	<i>1156.1</i>	1149.1
115°	1302.7	1321.3	1315.5	<i>1312.1</i>	1302.7
117.5°	1455.1	1480.6	1464.3	<i>1455.1</i>	1445.8
120°	1608.6	1634.2	1608.6	<i>1608.6</i>	1598.2
122.5°	1748.2	1780.7	1764.4	<i>1755.1</i>	1748.2
125°	1894.7	1923.8	1914.5	<i>1904.0</i>	1900.5
127.5°	2037.8	2073.8	2061.1	<i>2047.1</i>	2037.8
130°	2171.5	2213.5	2207.6	<i>2200.6</i>	2187.8
132.5°	2321.6	2354.2	2356.5	<i>2340.2</i>	2330.9
135°	2450.7	2486.7	2493.7	<i>2490.3</i>	2480.9
137.5°	2594.9	2624.0	2629.8	<i>2627.4</i>	2613.6
140°	2721.7	2750.8	2767.1	<i>2767.1</i>	2754.3
142.5°	2852.0	2881.1	2890.4	<i>2893.8</i>	2881.1
145°	2975.2	2998.5	3017.1	<i>3020.6</i>	3007.8
147.5°	3085.8	3114.8	3128.8	<i>3134.6</i>	3121.8
150°	3199.8	3219.5	3232.3	<i>3242.8</i>	3232.3
152.5°	3300.9	3320.7	3337.0	<i>3349.8</i>	3337.0
155°	3402.2	3411.4	3421.9	<i>3438.2</i>	3427.7
157.5°	3489.4	3496.3	3502.1	<i>3525.4</i>	3509.1
160°	3567.3	3574.3	3577.7	<i>3597.6</i>	3583.6
162.5°	3639.4	3639.4	3643.0	<i>3665.0</i>	3648.7
165°	3701.1	3697.5	3697.5	<i>3720.8</i>	3704.5
167.5°	3756.8	3746.4	3746.4	<i>3769.7</i>	3753.4
170°	3798.8	3789.5	3786.0	<i>3809.2</i>	3789.5
172.5°	3827.8	3818.5	3815.1	<i>3838.4</i>	3818.5
175°	3851.1	3841.8	3834.8	<i>3858.1</i>	3838.4
177.5°	<i>3863.9</i>	<i>3854.6</i>	<i>3847.6</i>	<i>3867.4</i>	<i>3847.6</i>
180°	3858.1	3858.1	3858.1	<i>3858.1</i>	3858.1



TEST NUMBER: P911358
 CATALOG NUMBER: DFN2DIP-PN4F0-040D110US850-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.34	6.01	6.49	7.14	8.72	1.31	1.97	2.45	3.10	4.68
	3H	7.01	7.60	8.16	8.74	10.34	2.48	3.08	3.63	4.22	5.81
	4H	7.61	8.18	8.77	9.32	10.92	2.93	3.49	4.09	4.63	6.23
	6H	8.03	8.55	9.20	9.69	11.30	3.24	3.76	4.41	4.90	6.51
	8H	8.15	8.65	9.32	9.80	11.40	3.33	3.82	4.50	4.98	6.58
	12H	8.21	8.68	9.38	9.83	11.45	3.36	3.83	4.54	4.98	6.61
4H	2H	5.34	5.91	6.51	7.04	8.64	1.88	2.45	3.05	3.59	5.19
	3H	7.16	7.63	8.33	8.79	10.40	3.22	3.69	4.39	4.85	6.47
	4H	7.84	8.28	9.02	9.43	11.06	3.76	4.20	4.94	5.35	6.98
	6H	8.35	8.72	9.53	9.90	11.52	4.17	4.54	5.35	5.72	7.34
	8H	8.53	8.87	9.71	10.04	11.68	4.30	4.64	5.48	5.81	7.45
	12H	8.62	8.93	9.81	10.11	11.75	4.36	4.67	5.55	5.85	7.49
8H	4H	7.80	8.15	8.98	9.31	10.95	4.03	4.38	5.21	5.54	7.18
	6H	8.36	8.65	9.56	9.86	11.49	4.55	4.83	5.74	6.04	7.67
	8H	8.58	8.83	9.78	10.02	11.67	4.74	4.98	5.94	6.17	7.82
	12H	8.72	8.93	9.92	10.12	11.80	4.85	5.07	6.05	6.25	7.94
12H	4H	7.74	8.06	8.94	9.24	10.88	4.03	4.34	5.22	5.52	7.16
	6H	8.34	8.59	9.54	9.77	11.43	4.59	4.84	5.80	6.03	7.68
	8H	8.55	8.77	9.76	9.96	11.64	4.80	5.02	6.00	6.20	7.89