

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911389

Luminaire Tested: DFN2DIP-PN4F0-050D100US850-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911389
REPORT IS A COMBINATION OF REPORTS P901239 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-050D100US850-FLLONL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 16468.7 lumens
Efficiency: N/A
Efficacy: 138.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 119
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911389

CATALOG NUMBER: DFN2DIP-PN4F0-050D100US850-FLLONL

Luminous Intensity Polar Plot

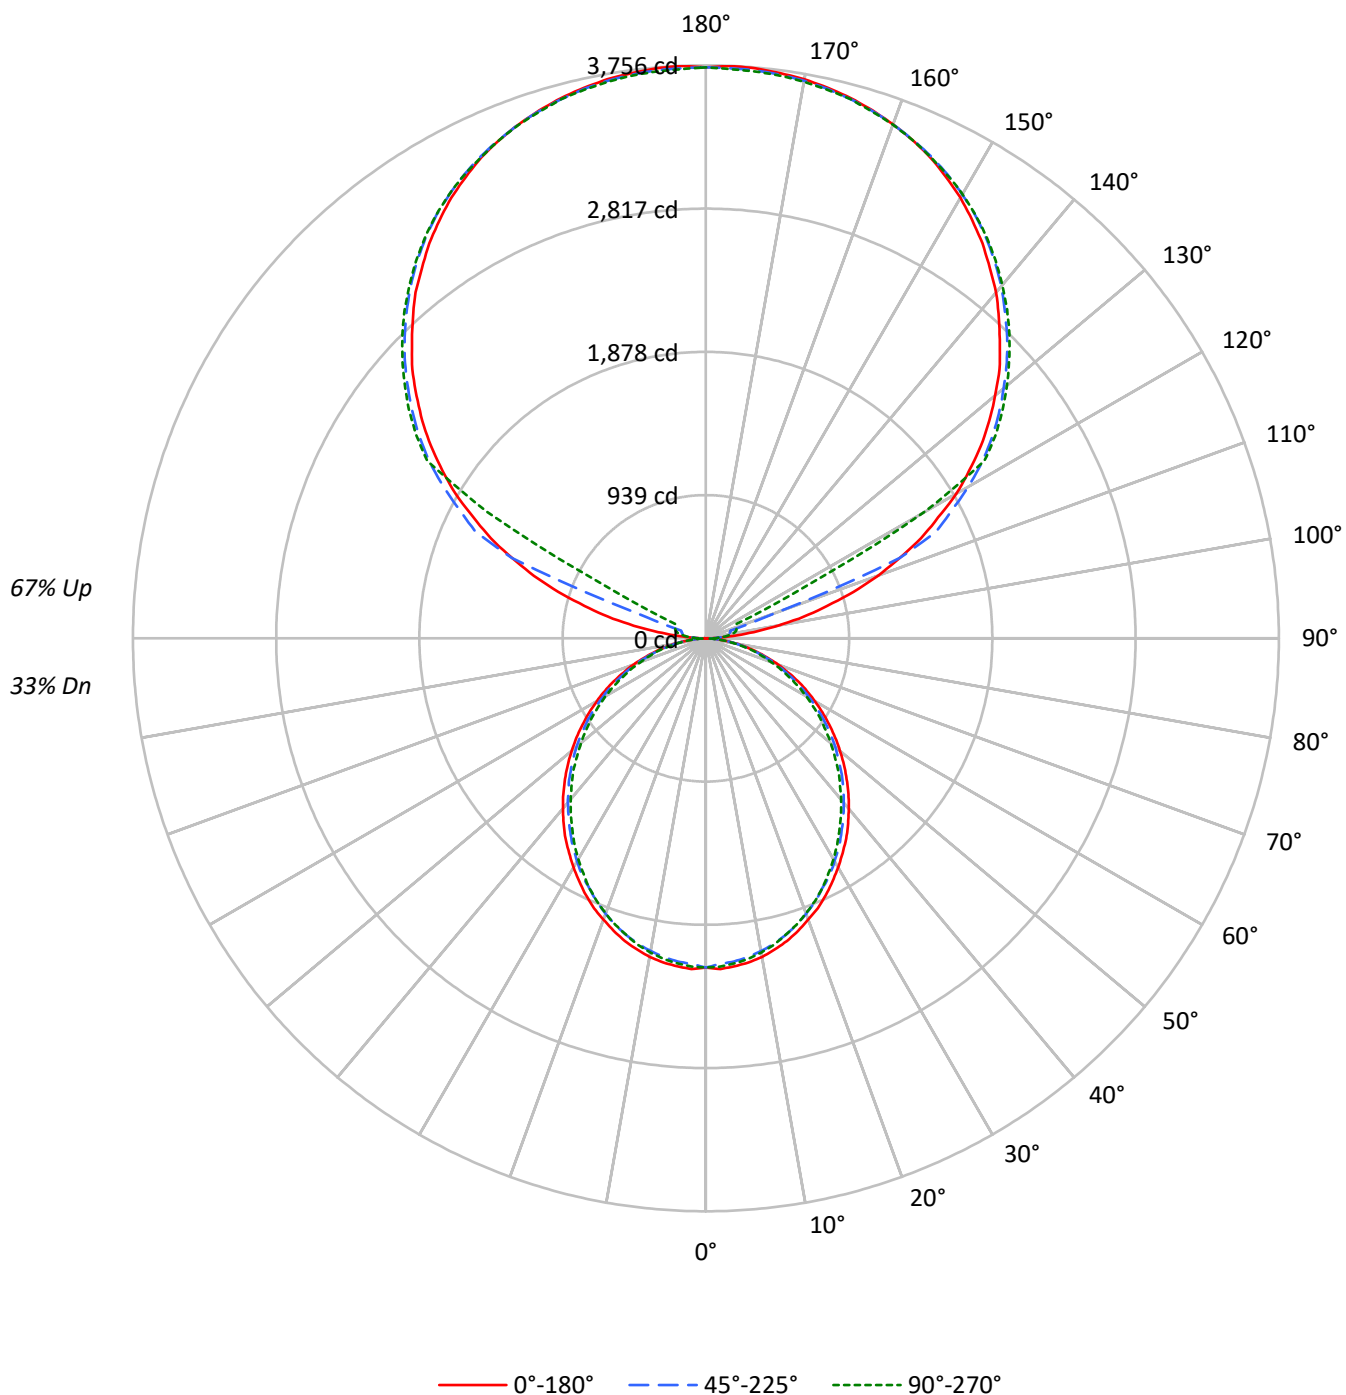

TEST NUMBER: P911389

CATALOG NUMBER: DFN2DIP-PN4F0-050D100US850-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	78	72	67	77	71	66	62	57	53	50	44	41	39	32	30	29
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25
4	71	61	53	47	64	55	49	43	44	40	36	34	31	28	25	23	21
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	20	18
6	60	48	41	35	54	44	37	32	36	31	27	28	24	21	20	18	16
7	56	44	36	30	50	40	33	28	32	27	23	25	22	19	19	16	14
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13
9	48	36	29	24	43	33	26	22	27	22	19	21	18	15	16	13	12
10	45	33	26	21	40	30	24	20	25	20	17	19	16	14	15	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1575	1575	1575
5°	1577	1553	1564
10°	1565	1533	1543
15°	1542	1507	1510
20°	1511	1473	1476
25°	1480	1431	1438
30°	1441	1392	1388
35°	1404	1346	1336
40°	1359	1300	1286
45°	1314	1254	1235
50°	1265	1205	1176
55°	1213	1149	1122
60°	1155	1082	1060
65°	1091	1013	986
70°	1010	929	908
75°	898	828	836
80°	763	700	697
85°	551	477	466

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1996 cd/sqm

TEST NUMBER: P911389

CATALOG NUMBER: DFN2DIP-PN4F0-050D100US850-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	203.1	1.2
10°-20°	571.4	3.5
20°-30°	839.7	5.1
30°-40°	975.2	5.9
40°-50°	974.0	5.9
50°-60°	849.3	5.2
60°-70°	627.9	3.8
70°-80°	355.2	2.2
80°-90°	100.3	0.6
90°-100°	123.4	0.7
100°-110°	460.1	2.8
110°-120°	1220.2	7.4
120°-130°	2023.8	12.3
130°-140°	2149.7	13.1
140°-150°	1997.9	12.1
150°-160°	1606.3	9.8
160°-170°	1035.0	6.3
170°-180°	356.2	2.2
0°-30°	1614.1	9.8
0°-40°	2589.4	15.7
0°-60°	4412.7	26.8
0°-90°	5496.1	33.4
90°-120°	1803.7	11.0
90°-150°	7975.0	48.4
90°-180°	10973.0	66.6
0°-180°	16468.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2158	2158	2158	2158	2158	
5°	2158	2150	2126	2143	2139	205
15°	2054	2042	2014	2023	2012	578
25°	1859	1842	1807	1811	1807	855
35°	1604	1583	1550	1537	1527	1001
45°	1305	1290	1259	1237	1228	1007
55°	988	975	950	925	915	883
65°	666	654	633	614	604	659
75°	348	344	334	322	326	372
85°	85	83	81	75	73	95
90°	3	32	54	68	73	15
95°	176	86	106	119	116	208
105°	823	905	165	195	206	880
115°	1557	1603	1671	417	222	1533
125°	2202	2237	2288	2308	2316	1964
135°	2725	2768	2792	2819	2814	2105
145°	3161	3158	3204	3223	3209	1977
155°	3480	3456	3488	3504	3483	1604
165°	3667	3651	3659	3678	3659	1036
175°	3751	3732	3737	3756	3729	357
180°	3743	3743	3743	3743	3743	

TEST NUMBER: P911389

CATALOG NUMBER: DFN2DIP-PN4F0-050D100US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2157.6	2157.6	2157.6	2157.6	2157.6
2.5°	2170.1	2159.8	2136.9	2157.6	2153.7
5°	2157.6	2149.5	2126.5	2143.0	2139.2
7.5°	2143.0	2130.7	2107.9	2124.6	2120.4
10°	2120.4	2105.9	2081.0	2097.5	2091.4
12.5°	2089.1	2076.8	2052.0	2062.3	2058.1
15°	2053.9	2041.6	2014.5	2022.9	2012.5
17.5°	2010.3	1998.0	1970.9	1981.2	1970.9
20°	1962.6	1950.3	1921.2	1927.3	1919.2
22.5°	1915.0	1896.3	1869.2	1869.2	1865.0
25°	1858.9	1842.4	1807.1	1811.1	1807.1
27.5°	1796.6	1782.1	1755.2	1749.0	1738.7
30°	1734.5	1717.8	1686.8	1680.6	1672.3
32.5°	1668.0	1655.7	1622.5	1609.9	1601.6
35°	1603.7	1583.1	1549.8	1537.3	1527.0
37.5°	1531.1	1512.5	1479.2	1464.7	1454.3
40°	1456.6	1439.8	1406.5	1388.0	1379.7
42.5°	1383.9	1367.2	1334.1	1313.2	1300.9
45°	1305.1	1290.5	1259.3	1236.6	1228.2
47.5°	1228.2	1213.7	1180.5	1157.6	1145.3
50°	1147.3	1136.9	1107.9	1078.8	1068.4
52.5°	1068.4	1053.9	1027.0	1004.2	989.7
55°	987.7	975.1	950.2	925.3	915.0
57.5°	906.6	896.3	869.2	844.4	836.0
60°	825.7	817.6	788.5	765.5	759.4
62.5°	746.9	732.4	711.6	690.9	682.6
65°	666.1	653.5	632.8	614.2	603.7
67.5°	583.1	572.6	554.1	539.5	531.1
70°	506.3	497.9	479.2	464.7	456.6
72.5°	427.5	419.1	408.8	394.2	388.0
75°	348.4	344.5	333.9	321.6	325.8
77.5°	278.0	269.6	265.5	259.3	253.2
80°	207.6	205.4	201.2	195.1	190.9
82.5°	141.1	141.1	139.1	130.8	130.8
85°	84.9	83.0	81.0	74.6	72.6
87.5°	37.4	33.3	29.1	22.8	20.7
90°	2.6	32.5	54.0	67.9	73.0
92.5°	67.9	56.9	65.0	70.4	73.0
95°	175.9	86.5	105.5	119.3	116.4
97.5°	316.7	94.8	138.0	146.3	148.9
100°	479.5	108.3	154.4	175.9	181.4
102.5°	658.0	652.9	159.8	189.4	197.7
105°	823.3	904.6	165.4	194.9	205.8
107.5°	1015.6	1083.2	170.8	200.4	211.3
110°	1199.8	1256.5	474.0	203.3	213.8

TEST NUMBER: P911389

CATALOG NUMBER: DFN2DIP-PN4F0-050D100US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1373.2	1421.7	1375.8	208.4	216.8
115°	1557.1	1603.2	1671.0	417.1	222.2
117.5°	1717.0	1771.1	1817.3	1429.8	720.4
120°	1895.8	1936.3	1985.2	2017.7	1652.1
122.5°	2047.3	2090.7	2145.0	2161.1	2164.0
125°	2201.7	2237.1	2288.5	2307.5	2315.5
127.5°	2342.5	2380.5	2421.3	2448.3	2450.9
130°	2475.3	2518.8	2548.4	2578.2	2575.7
132.5°	2610.7	2646.1	2675.7	2700.1	2697.5
135°	2724.6	2768.0	2792.1	2819.4	2814.0
137.5°	2843.6	2876.1	2903.4	2930.4	2922.3
140°	2959.9	2981.9	3011.4	3035.9	3022.4
142.5°	3057.7	3076.7	3111.7	3133.3	3119.8
145°	3160.6	3157.8	3203.8	3222.8	3209.2
147.5°	3249.7	3241.7	3287.6	3301.2	3290.6
150°	3336.5	3317.6	3361.0	3377.1	3363.6
152.5°	3409.5	3388.0	3428.6	3444.9	3425.9
155°	3480.0	3455.9	3488.4	3504.4	3482.9
157.5°	3536.9	3515.4	3539.8	3558.8	3536.9
160°	3585.8	3569.4	3585.8	3601.9	3583.0
162.5°	3628.9	3612.8	3626.3	3645.3	3620.9
165°	3666.8	3650.7	3658.8	3677.8	3658.8
167.5°	3696.7	3680.3	3688.8	3707.7	3683.2
170°	3721.1	3704.8	3710.3	3729.2	3704.8
172.5°	3737.2	3721.1	3726.7	3745.6	3721.1
175°	3750.7	3731.8	3737.2	3756.3	3729.2
177.5°	3756.3	3737.2	3740.2	3759.2	3734.7
180°	3742.8	3742.8	3742.8	3742.8	3742.8

TEST NUMBER: P911389

CATALOG NUMBER: DFN2DIP-PN4F0-050D100US850-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.08	7.81	8.17	8.90	10.39	6.64	7.37	7.73	8.46	9.95
	3H	8.74	9.39	9.83	10.49	11.99	8.25	8.91	9.35	10.00	11.51
	4H	9.32	9.94	10.43	11.04	12.55	8.83	9.45	9.94	10.55	12.06
	6H	9.72	10.29	10.83	11.39	12.91	9.22	9.80	10.34	10.89	12.42
	8H	9.82	10.36	10.94	11.48	13.00	9.33	9.87	10.45	10.98	12.50
	12H	9.86	10.38	10.99	11.49	13.03	9.36	9.88	10.49	10.99	12.53
4H	2H	7.53	8.15	8.64	9.25	10.76	7.18	7.80	8.29	8.90	10.41
	3H	9.39	9.90	10.51	11.03	12.55	8.98	9.50	10.10	10.62	12.15
	4H	10.10	10.57	11.22	11.69	13.23	9.68	10.16	10.80	11.27	12.81
	6H	10.61	11.02	11.74	12.15	13.69	10.18	10.59	11.32	11.73	13.27
	8H	10.76	11.14	11.89	12.26	13.82	10.33	10.71	11.46	11.84	13.39
	12H	10.82	11.17	11.97	12.31	13.87	10.38	10.73	11.53	11.87	13.43
8H	4H	10.28	10.66	11.41	11.79	13.35	9.91	10.29	11.04	11.42	12.98
	6H	10.91	11.23	12.07	12.40	13.95	10.54	10.85	11.69	12.02	13.57
	8H	11.13	11.41	12.29	12.56	14.13	10.75	11.02	11.91	12.17	13.75
	12H	11.26	11.50	12.42	12.65	14.26	10.86	11.10	12.02	12.25	13.85
12H	4H	10.26	10.61	11.41	11.75	13.31	9.90	10.25	11.05	11.39	12.94
	6H	10.94	11.22	12.10	12.37	13.94	10.58	10.85	11.74	12.00	13.57
	8H	11.18	11.42	12.34	12.57	14.17	10.81	11.05	11.97	12.20	13.80