

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911433

Luminaire Tested: DFN2DIP-PN4F0-060D120US850-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911433
REPORT IS A COMBINATION OF REPORTS P901277 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-060D120US850-FLLONL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 19762.3 lumens
Efficiency: N/A
Efficacy: 125.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 158.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911433

CATALOG NUMBER: DFN2DIP-PN4F0-060D120US850-FLLONL

Luminous Intensity Polar Plot

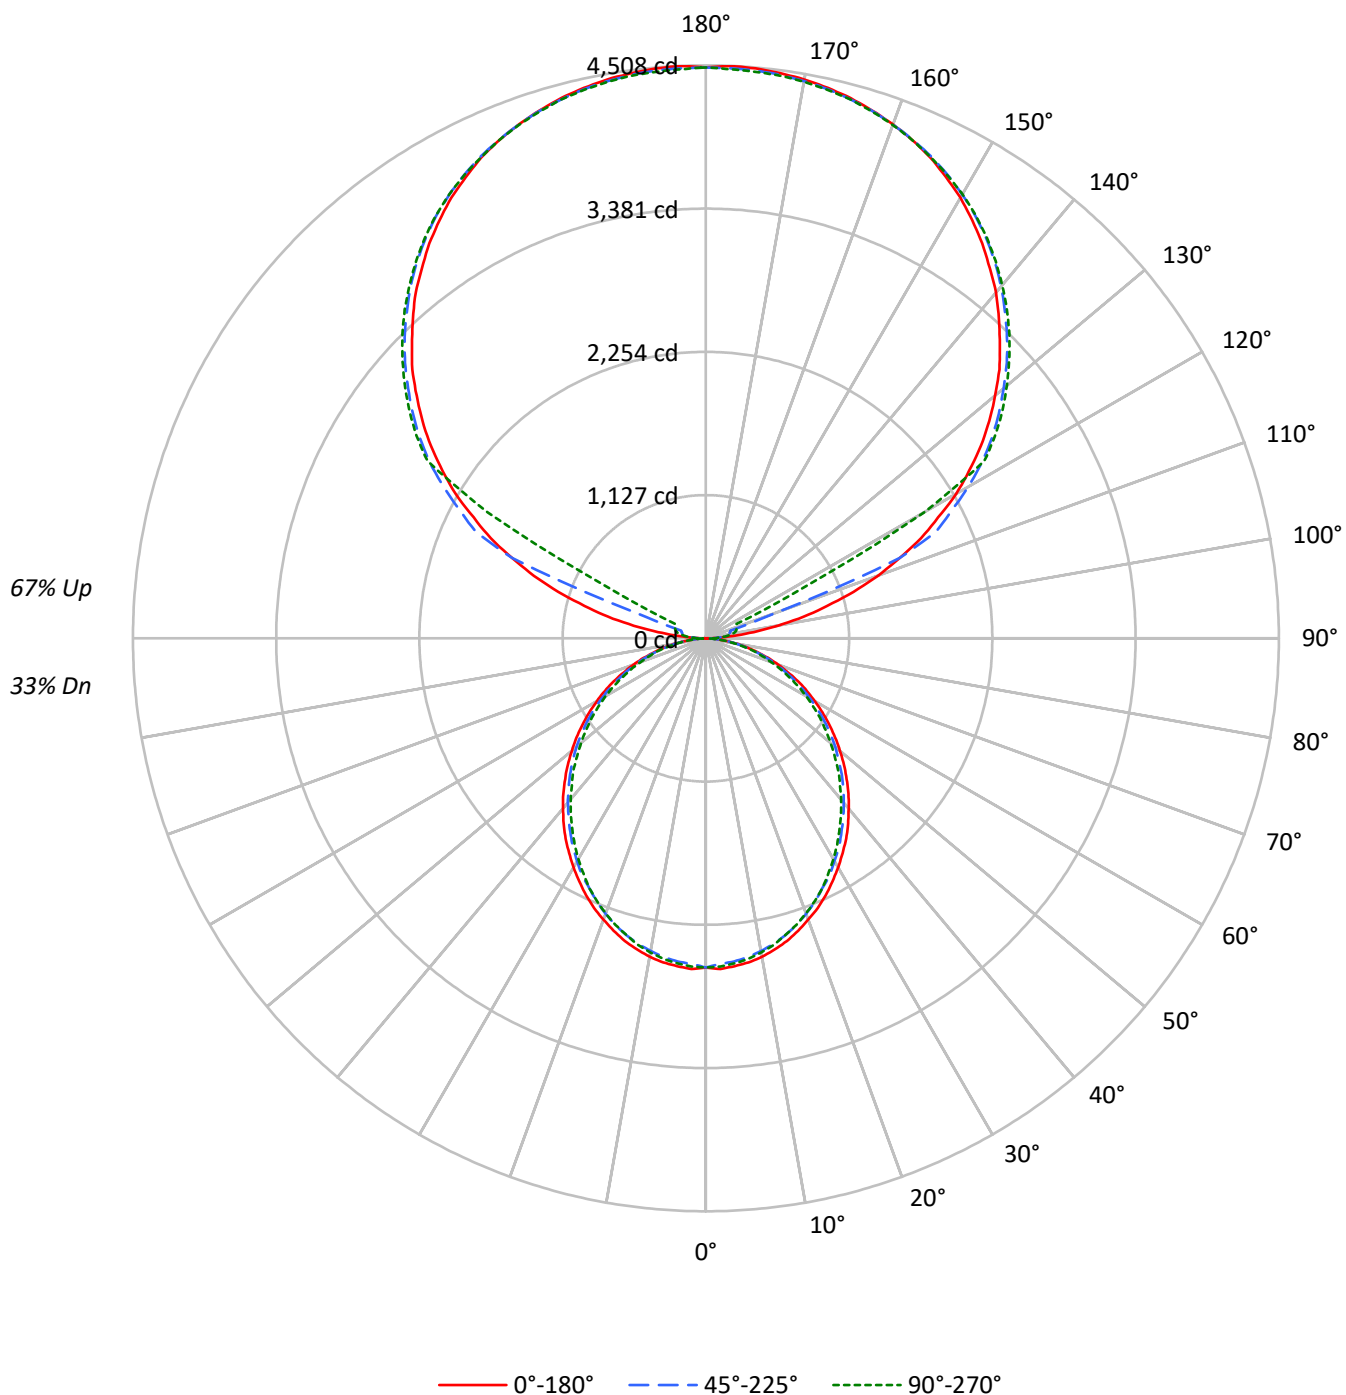

TEST NUMBER: P911433

CATALOG NUMBER: DFN2DIP-PN4F0-060D120US850-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	78	72	67	77	71	66	62	57	53	50	44	41	39	32	30	29
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25
4	71	61	53	47	64	55	49	43	44	40	36	34	31	28	25	23	21
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	20	18
6	60	48	41	35	54	44	37	32	36	31	27	28	24	21	20	18	16
7	56	44	36	30	50	40	33	28	32	27	23	25	22	19	19	16	14
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13
9	48	36	29	24	43	33	26	22	27	22	19	21	18	15	16	13	12
10	45	33	26	21	40	30	24	20	25	20	17	19	16	14	15	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1890	1890	1890
5°	1893	1864	1877
10°	1878	1839	1851
15°	1850	1809	1812
20°	1813	1767	1772
25°	1776	1717	1725
30°	1729	1671	1666
35°	1685	1616	1603
40°	1631	1560	1543
45°	1577	1505	1482
50°	1517	1446	1411
55°	1456	1379	1346
60°	1386	1299	1272
65°	1309	1216	1184
70°	1212	1114	1089
75°	1077	994	1003
80°	915	839	836
85°	661	572	560

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2395 cd/sqm

TEST NUMBER: P911433

CATALOG NUMBER: DFN2DIP-PN4F0-060D120US850-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	243.7	1.2
10°-20°	685.6	3.5
20°-30°	1007.6	5.1
30°-40°	1170.3	5.9
40°-50°	1168.8	5.9
50°-60°	1019.2	5.2
60°-70°	753.4	3.8
70°-80°	426.3	2.2
80°-90°	120.4	0.6
90°-100°	148.1	0.7
100°-110°	552.1	2.8
110°-120°	1464.2	7.4
120°-130°	2428.5	12.3
130°-140°	2579.6	13.1
140°-150°	2397.5	12.1
150°-160°	1927.5	9.8
160°-170°	1242.0	6.3
170°-180°	427.5	2.2
0°-30°	1937.0	9.8
0°-40°	3107.2	15.7
0°-60°	5295.3	26.8
0°-90°	6595.3	33.4
90°-120°	2164.4	11.0
90°-150°	9570.0	48.4
90°-180°	13167.0	66.6
0°-180°	19762.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2589	2589	2589	2589	2589	
5°	2589	2579	2552	2572	2567	246
15°	2465	2450	2417	2428	2415	694
25°	2231	2211	2168	2173	2168	1026
35°	1925	1900	1860	1845	1832	1202
45°	1566	1549	1511	1484	1474	1209
55°	1185	1170	1140	1110	1098	1060
65°	799	784	759	737	724	790
75°	418	413	401	386	391	446
85°	102	100	97	90	87	114
90°	3	39	65	81	88	18
95°	211	104	126	143	140	250
105°	988	1086	198	234	247	1056
115°	1869	1924	2005	500	267	1840
125°	2642	2684	2746	2769	2779	2356
135°	3269	3322	3350	3383	3377	2526
145°	3793	3789	3844	3867	3851	2372
155°	4176	4147	4186	4205	4180	1924
165°	4400	4381	4390	4413	4390	1243
175°	4501	4478	4485	4508	4475	428
180°	4491	4491	4491	4491	4491	

TEST NUMBER: P911433

CATALOG NUMBER: DFN2DIP-PN4F0-060D120US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2589.1	2589.1	2589.1	2589.1	2589.1
2.5°	2604.2	2591.7	2564.2	2589.1	2584.3
5°	2589.1	2579.3	2551.8	2571.7	2566.9
7.5°	2571.7	2556.9	2529.4	2549.5	2544.5
10°	2544.5	2527.1	2497.1	2517.0	2509.6
12.5°	2507.0	2492.1	2462.3	2474.7	2469.7
15°	2464.6	2449.9	2417.4	2427.5	2415.1
17.5°	2412.4	2397.7	2365.2	2377.5	2365.2
20°	2355.1	2340.3	2305.4	2312.8	2303.1
22.5°	2298.1	2275.6	2243.1	2243.1	2238.1
25°	2230.6	2210.9	2168.5	2173.3	2168.5
27.5°	2155.9	2138.5	2106.2	2098.9	2086.5
30°	2081.5	2061.3	2024.1	2016.7	2006.6
32.5°	2001.6	1986.9	1947.0	1931.9	1921.9
35°	1924.6	1899.7	1859.8	1844.7	1832.3
37.5°	1837.4	1814.9	1775.1	1757.5	1745.1
40°	1747.8	1727.7	1687.9	1665.7	1655.6
42.5°	1660.6	1640.5	1601.0	1575.9	1561.0
45°	1566.1	1548.6	1511.1	1484.0	1473.9
47.5°	1473.9	1456.4	1416.6	1389.1	1374.3
50°	1376.7	1364.3	1329.5	1294.5	1282.1
52.5°	1282.1	1264.7	1232.4	1205.0	1187.6
55°	1185.2	1170.1	1140.3	1110.4	1098.0
57.5°	1088.0	1075.6	1043.1	1013.3	1003.2
60°	990.8	981.0	946.2	918.7	911.3
62.5°	896.2	878.8	853.9	829.1	819.1
65°	799.3	784.3	759.4	736.9	724.5
67.5°	699.7	687.0	664.8	647.4	637.3
70°	607.5	597.5	575.0	557.6	547.8
72.5°	512.9	502.9	490.5	473.1	465.7
75°	418.1	413.4	400.7	385.9	390.9
77.5°	333.6	323.6	318.5	311.2	303.8
80°	249.1	246.4	241.4	234.0	229.0
82.5°	169.3	169.3	166.9	156.9	156.9
85°	101.9	99.6	97.1	89.5	87.2
87.5°	44.9	39.9	34.8	27.5	24.8
90°	3.1	38.9	64.9	81.4	87.6
92.5°	81.4	68.3	78.0	84.5	87.6
95°	211.0	103.8	126.5	143.2	139.7
97.5°	380.2	113.9	165.6	175.6	178.7
100°	575.3	130.1	185.2	211.0	217.7
102.5°	789.6	783.4	191.7	227.3	237.3
105°	987.9	1085.6	198.4	233.9	247.0
107.5°	1218.7	1299.7	204.9	240.4	253.5
110°	1439.8	1507.8	568.8	243.9	256.6

TEST NUMBER: P911433

CATALOG NUMBER: DFN2DIP-PN4F0-060D120US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1647.9	1706.1	1651.0	250.1	260.1
115°	1868.6	1923.8	2005.2	500.5	266.7
117.5°	2060.4	2125.3	2180.8	1715.7	864.5
120°	2275.0	2323.6	2382.2	2421.3	1982.4
122.5°	2456.8	2508.9	2574.1	2593.4	2596.8
125°	2642.0	2684.4	2746.2	2769.0	2778.6
127.5°	2811.0	2856.6	2905.6	2938.0	2941.1
130°	2970.3	3022.5	3058.0	3093.9	3090.8
132.5°	3132.8	3175.3	3210.8	3240.2	3237.1
135°	3269.4	3321.6	3350.5	3383.3	3376.8
137.5°	3412.3	3451.2	3484.0	3516.4	3506.8
140°	3552.0	3578.2	3613.7	3643.1	3626.9
142.5°	3669.2	3692.1	3734.1	3760.0	3743.8
145°	3792.8	3789.3	3844.5	3867.3	3851.0
147.5°	3899.7	3890.0	3945.3	3961.5	3948.7
150°	4003.8	3981.1	4033.2	4052.5	4036.3
152.5°	4091.4	4065.6	4114.3	4133.9	4111.2
155°	4175.9	4147.0	4186.0	4205.3	4179.5
157.5°	4244.3	4218.4	4247.8	4270.5	4244.3
160°	4302.9	4283.3	4302.9	4322.2	4299.5
162.5°	4354.7	4335.4	4351.6	4374.3	4345.1
165°	4400.2	4380.9	4390.5	4413.4	4390.5
167.5°	4436.1	4416.4	4426.5	4449.2	4419.9
170°	4465.4	4445.8	4452.3	4475.0	4445.8
172.5°	4484.7	4465.4	4472.0	4494.8	4465.4
175°	4500.9	4478.1	4484.7	4507.5	4475.0
177.5°	4507.5	4484.7	4488.2	4511.0	4481.7
180°	4491.3	4491.3	4491.3	4491.3	4491.3

TEST NUMBER: P911433

CATALOG NUMBER: DFN2DIP-PN4F0-060D120US850-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.72	8.45	8.81	9.53	11.02	7.28	8.01	8.37	9.09	10.58
	3H	9.37	10.02	10.47	11.12	12.63	8.89	9.54	9.98	10.64	12.14
	4H	9.95	10.57	11.06	11.67	13.18	9.47	10.09	10.57	11.18	12.70
	6H	10.35	10.92	11.47	12.02	13.55	9.86	10.43	10.97	11.53	13.05
	8H	10.45	10.99	11.57	12.11	13.63	9.96	10.50	11.08	11.62	13.14
	12H	10.50	11.01	11.62	12.12	13.66	10.00	10.51	11.12	11.62	13.16
4H	2H	8.16	8.78	9.28	9.88	11.39	7.81	8.43	8.93	9.53	11.04
	3H	10.02	10.54	11.14	11.66	13.19	9.62	10.13	10.74	11.26	12.78
	4H	10.73	11.21	11.86	12.32	13.87	10.31	10.79	11.44	11.90	13.45
	6H	11.24	11.65	12.37	12.78	14.32	10.82	11.22	11.95	12.36	13.90
	8H	11.39	11.77	12.52	12.90	14.45	10.96	11.34	12.09	12.47	14.02
	12H	11.46	11.80	12.61	12.94	14.50	11.02	11.36	12.17	12.50	14.06
8H	4H	10.92	11.30	12.05	12.43	13.98	10.55	10.93	11.68	12.05	13.61
	6H	11.55	11.86	12.70	13.03	14.58	11.17	11.48	12.32	12.65	14.20
	8H	11.77	12.04	12.93	13.19	14.76	11.38	11.66	12.54	12.81	14.38
	12H	11.89	12.14	13.06	13.28	14.89	11.49	11.73	12.66	12.88	14.49
12H	4H	10.90	11.24	12.04	12.38	13.94	10.53	10.88	11.68	12.02	13.58
	6H	11.58	11.85	12.73	13.00	14.57	11.21	11.49	12.37	12.63	14.21
	8H	11.81	12.05	12.98	13.20	14.81	11.44	11.68	12.60	12.83	14.43