

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911434

Luminaire Tested: DFN2DIP-PN4F0-060D120US850-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911434
REPORT IS A COMBINATION OF REPORTS P899758 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-060D120US850-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17433.5 lumens
Efficiency: N/A
Efficacy: 110.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 158.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911434

CATALOG NUMBER: DFN2DIP-PN4F0-060D120US850-RLLFLL

Luminous Intensity Polar Plot

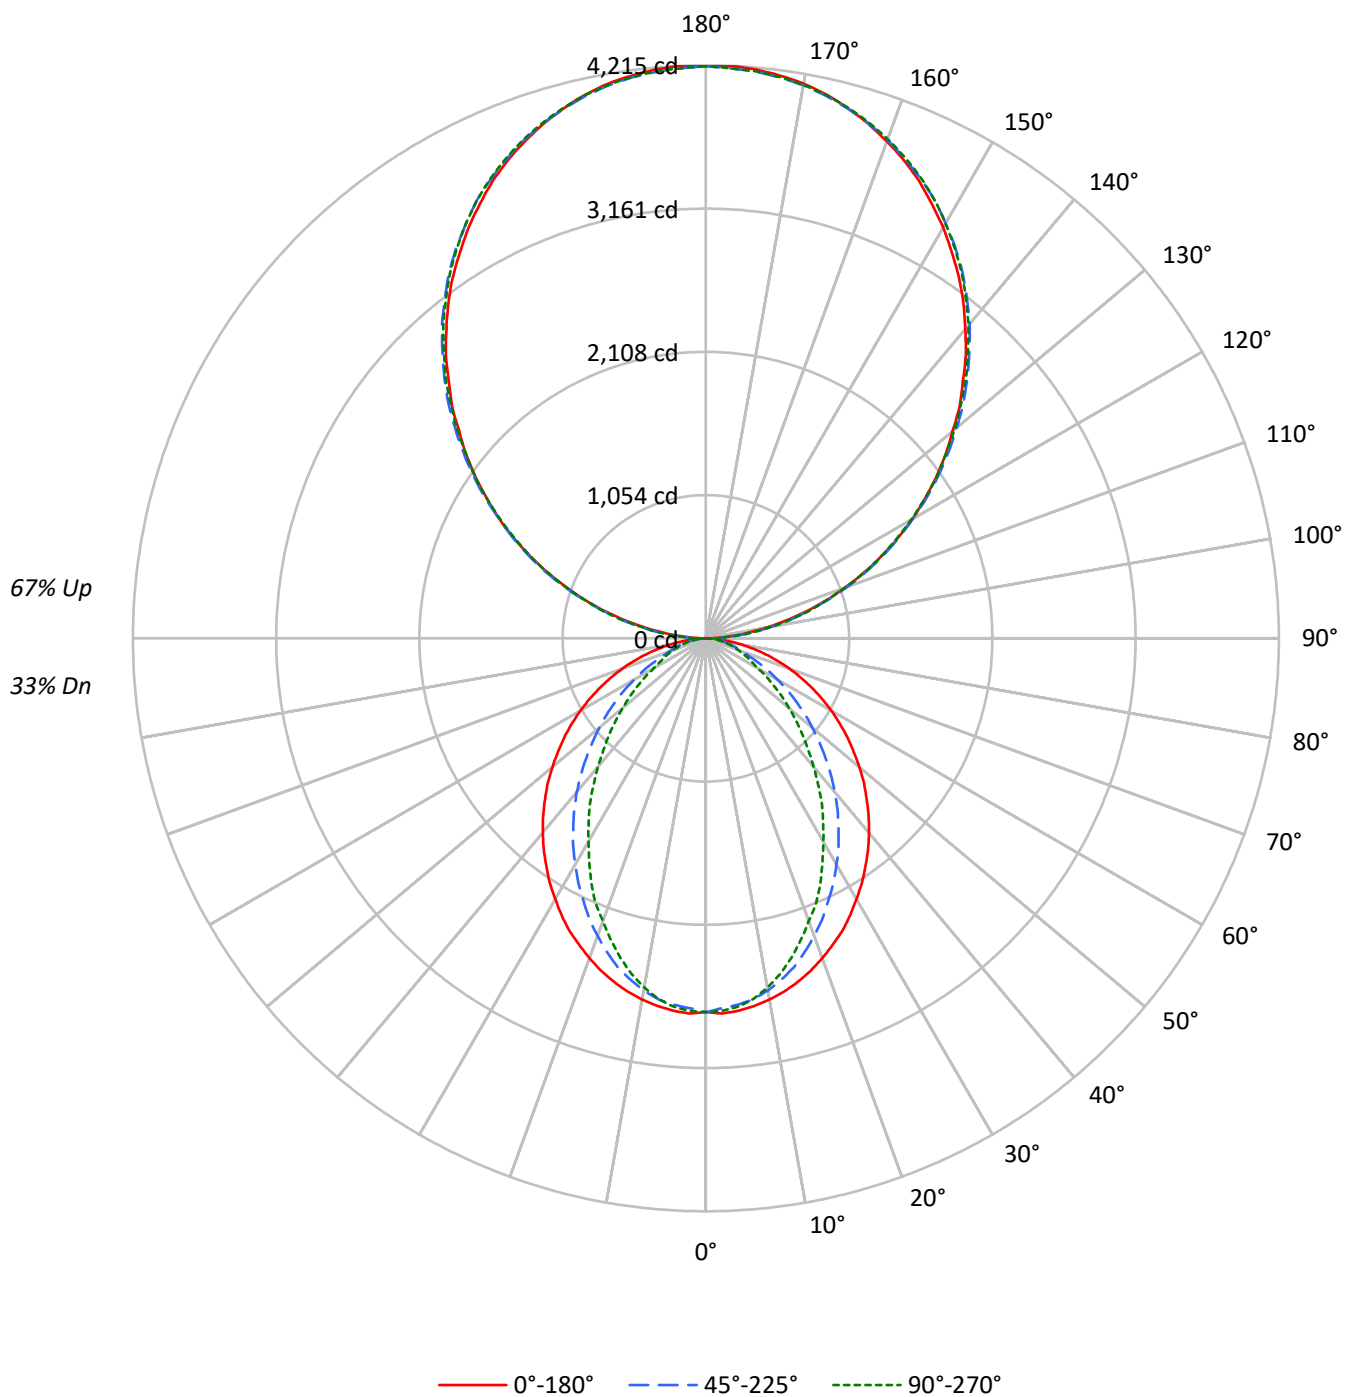

TEST NUMBER: P911434

CATALOG NUMBER: DFN2DIP-PN4F0-060D120US850-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	79	73	68	77	71	67	62	57	54	51	44	42	40	32	31	29
3	79	70	63	57	71	63	57	52	51	46	43	39	36	34	29	27	25
4	72	62	54	49	65	56	50	45	45	41	37	35	32	29	26	24	22
5	66	55	47	42	59	50	43	38	40	36	32	32	28	26	23	21	19
6	61	49	42	36	55	45	38	33	36	32	28	29	25	23	21	19	17
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	19	17	15
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13
10	45	34	27	22	41	31	25	21	25	21	18	20	17	15	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2007	2007	2007
5°	2011	1976	1989
10°	1991	1937	1924
15°	1963	1874	1825
20°	1927	1786	1702
25°	1890	1687	1584
30°	1840	1586	1434
35°	1791	1477	1302
40°	1742	1364	1150
45°	1684	1239	1013
50°	1624	1113	879
55°	1562	978	751
60°	1490	837	618
65°	1407	693	557
70°	1306	559	504
75°	1180	494	460
80°	997	415	400
85°	694	278	303

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 3294 cd/sqm

TEST NUMBER: P911434

CATALOG NUMBER: DFN2DIP-PN4F0-060D120US850-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	257.7	1.5
10°-20°	707.6	4.1
20°-30°	993.4	5.7
30°-40°	1082.8	6.2
40°-50°	995.2	5.7
50°-60°	781.6	4.5
60°-70°	508.8	2.9
70°-80°	261.9	1.5
80°-90°	78.8	0.5
90°-100°	260.4	1.5
100°-110°	827.5	4.7
110°-120°	1416.1	8.1
120°-130°	1862.4	10.7
130°-140°	2090.5	12.0
140°-150°	2050.0	11.8
150°-160°	1719.6	9.9
160°-170°	1140.4	6.5
170°-180°	398.6	2.3
0°-30°	1958.7	11.2
0°-40°	3041.5	17.4
0°-60°	4818.4	27.6
0°-90°	5667.9	32.5
90°-120°	2504.0	14.4
90°-150°	8506.9	48.8
90°-180°	11766.0	67.5
0°-180°	17433.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2750	2750	2750	2750	2750	
5°	2750	2738	2705	2728	2720	261
15°	2616	2588	2504	2456	2432	737
25°	2374	2295	2130	2028	1991	1092
35°	2046	1919	1700	1543	1488	1281
45°	1672	1506	1244	1068	1008	1292
55°	1272	1078	809	660	612	1136
65°	859	657	433	349	341	851
75°	458	284	199	182	179	484
85°	107	55	47	47	47	123
90°	4	46	124	117	120	17
95°	185	221	227	227	221	206
105°	764	774	782	788	788	806
115°	1421	1442	1435	1431	1421	1406
125°	2067	2099	2089	2077	2073	1847
135°	2674	2713	2720	2717	2706	2066
145°	3246	3271	3291	3295	3281	2028
155°	3711	3722	3733	3751	3739	1708
165°	4038	4034	4034	4059	4041	1139
175°	4201	4191	4184	4209	4187	399
180°	4209	4209	4209	4209	4209	

TEST NUMBER: P911434

CATALOG NUMBER: DFN2DIP-PN4F0-060D120US850-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2750.1	2750.1	2750.1	2750.1	2750.1
2.5°	2762.5	2750.1	2722.6	2747.7	2742.7
5°	2750.1	2737.7	2705.2	2727.7	2720.3
7.5°	2727.7	2712.8	2678.0	2687.8	2675.4
10°	2697.8	2680.3	2630.8	2623.1	2608.3
12.5°	2660.6	2638.1	2570.8	2556.0	2528.5
15°	2615.7	2588.2	2503.7	2456.4	2431.6
17.5°	2563.5	2523.5	2419.0	2364.3	2324.5
20°	2503.7	2453.8	2329.5	2267.4	2212.5
22.5°	2439.0	2381.7	2237.3	2152.8	2115.5
25°	2374.4	2294.6	2130.4	2028.5	1991.0
27.5°	2297.3	2212.5	2030.8	1913.8	1856.6
30°	2215.1	2120.3	1921.2	1794.5	1727.2
32.5°	2135.4	2020.8	1817.0	1667.5	1605.2
35°	2045.9	1918.9	1700.0	1543.1	1488.2
37.5°	1958.7	1821.6	1590.4	1418.5	1356.4
40°	1866.6	1717.4	1475.7	1299.1	1234.4
42.5°	1772.1	1612.8	1361.4	1177.1	1115.1
45°	1672.5	1505.6	1244.5	1067.5	1007.9
47.5°	1578.0	1401.3	1132.5	955.6	901.0
50°	1473.4	1296.8	1022.9	851.0	799.0
52.5°	1371.2	1184.5	918.4	754.1	706.9
55°	1271.7	1077.6	808.8	659.6	612.3
57.5°	1169.8	970.6	711.9	572.5	532.5
60°	1065.2	866.1	609.7	483.0	443.0
62.5°	963.3	764.2	522.6	403.2	383.4
65°	858.7	657.0	433.1	348.6	340.9
67.5°	759.1	557.4	348.6	306.1	298.7
70°	654.5	460.5	288.6	263.8	253.7
72.5°	555.1	370.7	241.3	221.6	216.5
75°	457.9	283.6	199.1	181.7	179.3
77.5°	361.0	201.5	156.8	146.8	141.8
80°	271.2	144.4	119.3	109.6	109.6
82.5°	189.1	97.1	82.1	77.1	77.1
85°	106.9	54.7	47.2	47.2	47.2
87.5°	39.9	19.9	19.9	17.4	17.4
90°	3.8	45.7	124.3	116.8	120.5
92.5°	78.6	106.6	110.3	114.2	114.2
95°	185.2	220.8	227.1	227.1	220.8
97.5°	308.3	341.4	355.3	355.3	355.3
100°	450.5	479.6	489.7	489.7	486.0
102.5°	600.2	621.7	635.7	639.6	635.7
105°	763.9	774.0	781.6	787.9	787.9
107.5°	926.2	941.5	941.5	944.0	926.2
110°	1083.6	1103.9	1103.9	1103.9	1093.8

TEST NUMBER: P911434

CATALOG NUMBER: DFN2DIP-PN4F0-060D120US850-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1253.6	1275.2	1271.4	1261.3	1253.6
115°	1421.1	1441.5	1435.0	1431.3	1421.1
117.5°	1587.3	1615.3	1597.5	1587.3	1577.2
120°	1754.9	1782.7	1754.9	1754.9	1743.5
122.5°	1907.1	1942.6	1924.9	1914.7	1907.1
125°	2067.0	2098.7	2088.6	2077.2	2073.3
127.5°	2223.1	2262.4	2248.4	2233.2	2223.1
130°	2368.9	2414.6	2408.3	2400.7	2386.7
132.5°	2532.6	2568.2	2570.7	2552.9	2542.8
135°	2673.5	2712.8	2720.5	2716.6	2706.5
137.5°	2830.8	2862.6	2868.9	2866.3	2851.1
140°	2969.1	3000.8	3018.6	3018.6	3004.6
142.5°	3111.3	3143.0	3153.1	3156.9	3143.0
145°	3245.7	3271.1	3291.4	3295.3	3281.3
147.5°	3366.3	3398.0	3413.3	3419.6	3405.6
150°	3490.7	3512.2	3526.2	3537.6	3526.2
152.5°	3601.0	3622.5	3640.4	3654.4	3640.4
155°	3711.4	3721.6	3733.0	3750.7	3739.3
157.5°	3806.6	3814.2	3820.5	3845.9	3828.2
160°	3891.6	3899.2	3903.0	3924.6	3909.3
162.5°	3970.2	3970.2	3974.1	3998.2	3980.4
165°	4037.5	4033.8	4033.8	4059.1	4041.3
167.5°	4098.4	4087.0	4087.0	4112.4	4094.6
170°	4144.1	4133.9	4130.1	4155.5	4133.9
172.5°	4175.8	4165.6	4161.9	4187.3	4165.6
175°	4201.2	4191.0	4183.5	4208.8	4187.3
177.5°	4215.2	4205.0	4197.3	4219.0	4197.3
180°	4208.8	4208.8	4208.8	4208.8	4208.8

TEST NUMBER: P911434

CATALOG NUMBER: DFN2DIP-PN4F0-060D120US850-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.67	8.38	8.77	9.47	10.98	3.64	4.34	4.74	5.44	6.94
	3H	9.34	9.97	10.45	11.08	12.60	4.82	5.45	5.93	6.55	8.07
	4H	9.95	10.55	11.07	11.65	13.18	5.26	5.86	6.38	6.96	8.49
	6H	10.37	10.92	11.49	12.02	13.56	5.58	6.13	6.71	7.23	8.77
	8H	10.49	11.01	11.62	12.14	13.67	5.67	6.19	6.80	7.31	8.84
	12H	10.55	11.05	11.68	12.16	13.71	5.71	6.20	6.84	7.32	8.87
4H	2H	7.68	8.27	8.80	9.38	10.90	4.22	4.82	5.35	5.92	7.45
	3H	9.50	10.00	10.63	11.12	12.66	5.56	6.06	6.69	7.19	8.73
	4H	10.19	10.64	11.32	11.76	13.32	6.10	6.56	7.24	7.68	9.24
	6H	10.70	11.09	11.84	12.23	13.78	6.52	6.91	7.66	8.05	9.60
	8H	10.87	11.24	12.01	12.37	13.94	6.64	7.01	7.78	8.14	9.71
	12H	10.96	11.29	12.12	12.44	14.01	6.70	7.04	7.86	8.18	9.75
8H	4H	10.15	10.51	11.29	11.64	13.21	6.38	6.74	7.52	7.87	9.44
	6H	10.71	11.01	11.87	12.19	13.75	6.89	7.19	8.05	8.37	9.93
	8H	10.93	11.19	12.09	12.35	13.93	7.08	7.35	8.25	8.50	10.08
	12H	11.06	11.29	12.23	12.45	14.06	7.20	7.43	8.37	8.58	10.20
12H	4H	10.09	10.42	11.25	11.57	13.14	6.38	6.71	7.53	7.85	9.42
	6H	10.69	10.95	11.85	12.10	13.69	6.94	7.20	8.11	8.36	9.94
	8H	10.90	11.13	12.07	12.28	13.90	7.15	7.38	8.32	8.53	10.15