

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911483

Luminaire Tested: DFN2DIP-PN4F0-080D060US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911483
REPORT IS A COMBINATION OF REPORTS P901174 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-080D060US850-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14128.7 lumens
Efficiency: N/A
Efficacy: 115.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 122.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911483

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US850-RLLONL

Luminous Intensity Polar Plot

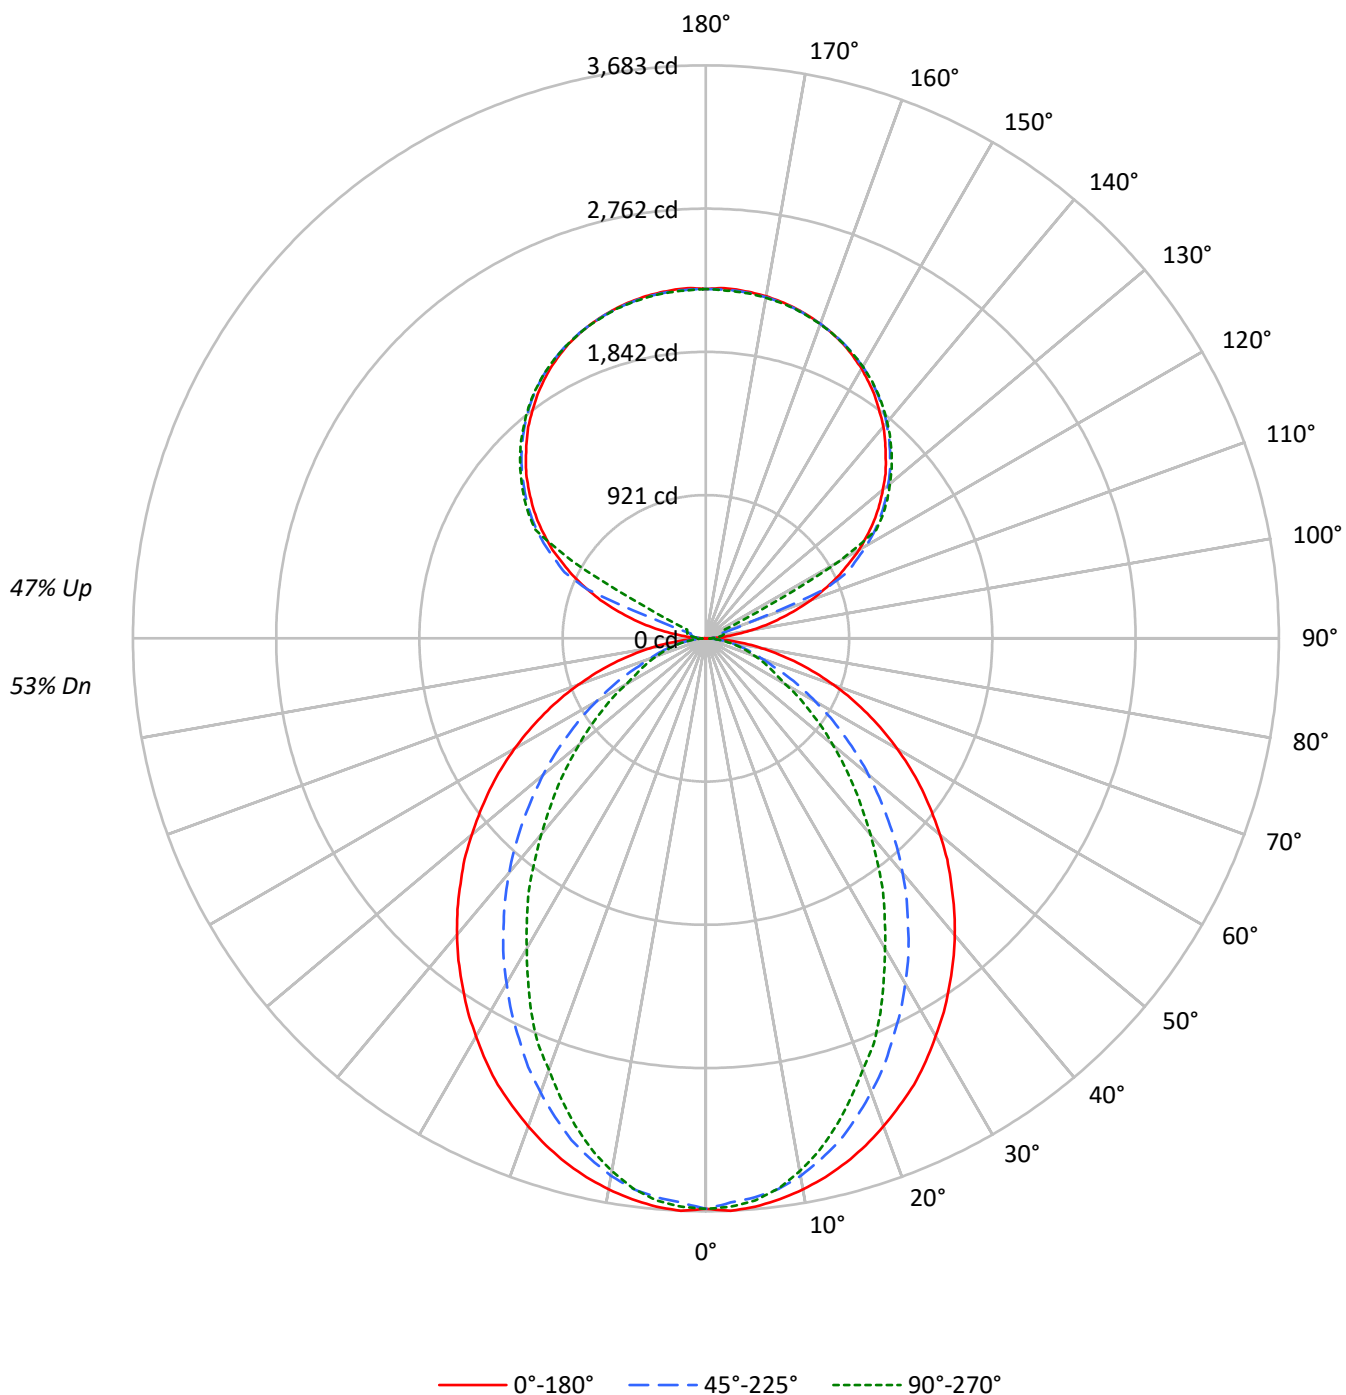

TEST NUMBER: P911483

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	108	108	108	108		100	100	100	100		85	85	85		72	72	72		59	59	59
1	99	95	91	88		92	88	85	82		76	73	71		64	62	61		53	52	51
2	91	83	78	73		84	78	73	68		67	63	60		57	54	52		47	45	44
3	83	74	67	61		77	69	63	58		59	55	51		51	47	44		42	40	38
4	76	66	58	52		70	61	55	49		53	48	44		45	42	38		38	35	33
5	70	59	51	45		65	55	48	43		48	42	38		41	37	34		35	32	29
6	65	53	45	39		60	50	43	37		43	38	34		37	33	30		32	28	26
7	60	48	40	35		56	45	38	33		39	34	30		34	30	26		29	26	23
8	56	44	36	31		52	41	34	29		36	31	27		31	27	24		27	24	21
9	52	40	33	28		48	38	31	26		33	28	24		29	25	22		25	22	19
10	49	37	30	25		45	35	28	24		31	25	22		27	23	20		23	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2677	2677	2677
5°	2681	2634	2651
10°	2654	2583	2566
15°	2618	2498	2433
20°	2569	2381	2269
25°	2520	2249	2112
30°	2453	2114	1912
35°	2388	1969	1736
40°	2322	1819	1534
45°	2245	1652	1351
50°	2165	1484	1172
55°	2082	1304	1001
60°	1986	1116	824
65°	1875	924	743
70°	1741	746	673
75°	1573	658	613
80°	1328	553	533
85°	926	371	404

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2245 cd/sqm

TEST NUMBER: P911483

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	343.7	2.4
10°-20°	943.4	6.7
20°-30°	1324.5	9.4
30°-40°	1443.8	10.2
40°-50°	1327.0	9.4
50°-60°	1042.1	7.4
60°-70°	678.3	4.8
70°-80°	349.2	2.5
80°-90°	93.1	0.7
90°-100°	74.1	0.5
100°-110°	276.0	2.0
110°-120°	732.1	5.2
120°-130°	1214.2	8.6
130°-140°	1289.8	9.1
140°-150°	1198.7	8.5
150°-160°	963.8	6.8
160°-170°	621.0	4.4
170°-180°	213.7	1.5
0°-30°	2611.6	18.5
0°-40°	4055.4	28.7
0°-60°	6424.5	45.5
0°-90°	7545.2	53.4
90°-120°	1082.2	7.7
90°-150°	4785.0	33.9
90°-180°	6583.0	46.6
0°-180°	14128.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3667	3667	3667	3667	3667	
5°	3667	3650	3607	3637	3627	348
15°	3488	3451	3338	3275	3242	983
25°	3166	3060	2840	2705	2655	1456
35°	2728	2558	2267	2058	1984	1707
45°	2230	2008	1659	1423	1344	1722
55°	1696	1437	1078	879	816	1515
65°	1145	876	577	465	454	1135
75°	610	378	266	242	239	646
85°	143	73	63	63	63	164
90°	2	20	32	41	44	13
95°	106	52	63	72	70	125
105°	494	543	99	117	124	528
115°	934	962	1003	250	133	920
125°	1321	1342	1373	1384	1389	1178
135°	1635	1661	1675	1692	1688	1263
145°	1896	1895	1922	1934	1926	1186
155°	2088	2074	2093	2103	2090	962
165°	2200	2190	2195	2207	2195	622
175°	2250	2239	2242	2254	2238	214
180°	2246	2246	2246	2246	2246	

TEST NUMBER: P911483

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3666.8	3666.8	3666.8	3666.8	3666.8
2.5°	3683.3	3666.8	3630.2	3663.6	3656.9
5°	3666.8	3650.3	3606.9	3636.9	3627.0
7.5°	3636.9	3617.1	3570.6	3583.7	3567.1
10°	3597.0	3573.9	3507.7	3497.5	3477.7
12.5°	3547.5	3517.5	3427.7	3408.0	3371.4
15°	3487.6	3451.0	3338.3	3275.3	3242.2
17.5°	3417.8	3364.7	3225.3	3152.4	3099.2
20°	3338.3	3271.8	3106.0	3023.2	2949.9
22.5°	3252.0	3175.6	2983.1	2870.4	2820.7
25°	3165.8	3059.5	2840.5	2704.6	2654.6
27.5°	3062.9	2949.9	2707.7	2551.8	2475.4
30°	2953.5	2827.1	2561.7	2392.7	2302.8
32.5°	2847.1	2694.4	2422.6	2223.3	2140.3
35°	2727.8	2558.5	2266.6	2057.5	1984.2
37.5°	2611.6	2428.9	2120.5	1891.3	1808.6
40°	2488.8	2289.9	1967.7	1732.1	1645.9
42.5°	2362.7	2150.5	1815.2	1569.6	1486.7
45°	2230.0	2007.5	1659.3	1423.4	1343.9
47.5°	2104.0	1868.4	1510.0	1274.1	1201.3
50°	1964.5	1729.0	1364.0	1134.7	1065.3
52.5°	1828.3	1579.3	1224.4	1005.5	942.5
55°	1695.6	1436.8	1078.4	879.4	816.4
57.5°	1559.7	1294.2	949.2	763.3	710.1
60°	1420.2	1154.8	812.9	643.9	590.8
62.5°	1284.3	1018.8	696.8	537.6	511.2
65°	1144.9	875.9	577.3	464.8	454.5
67.5°	1012.2	743.3	464.8	408.0	398.2
70°	872.8	614.1	384.8	351.7	338.4
72.5°	740.0	494.3	321.8	295.4	288.7
75°	610.5	378.2	265.5	242.2	239.1
77.5°	481.3	268.6	209.2	195.7	189.1
80°	361.5	192.6	159.1	146.1	146.1
82.5°	252.1	129.5	109.5	102.8	102.8
85°	142.6	72.9	63.0	63.0	63.0
87.5°	53.1	26.4	26.4	23.3	23.3
90°	1.6	19.5	32.4	40.7	43.8
92.5°	40.7	34.2	38.9	42.3	43.8
95°	105.6	51.9	63.3	71.6	69.9
97.5°	190.1	56.9	82.7	87.8	89.4
100°	287.7	65.0	92.6	105.6	108.8
102.5°	394.8	391.7	95.9	113.7	118.7
105°	493.9	542.7	99.1	116.9	123.5
107.5°	609.4	649.9	102.5	120.2	126.8
110°	720.0	753.9	284.5	122.0	128.3

TEST NUMBER: P911483

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	823.9	853.0	825.4	125.0	130.1
115°	934.3	961.9	1002.6	250.3	133.3
117.5°	1030.2	1062.6	1090.4	857.9	432.2
120°	1137.5	1161.8	1191.2	1210.6	991.2
122.5°	1228.3	1254.4	1287.0	1296.6	1298.4
125°	1321.0	1342.2	1373.1	1384.5	1389.2
127.5°	1405.5	1428.3	1452.8	1469.0	1470.5
130°	1485.2	1511.2	1529.0	1546.9	1545.4
132.5°	1566.5	1587.6	1605.4	1620.0	1618.5
135°	1634.8	1660.8	1675.3	1691.7	1688.3
137.5°	1706.1	1725.6	1742.0	1758.2	1753.4
140°	1776.0	1789.1	1806.9	1821.5	1813.4
142.5°	1834.6	1846.0	1867.1	1880.0	1871.9
145°	1896.4	1894.6	1922.2	1933.7	1925.6
147.5°	1949.8	1945.0	1972.6	1980.7	1974.4
150°	2002.0	1990.5	2016.6	2026.3	2018.2
152.5°	2045.8	2032.8	2057.1	2067.0	2055.5
155°	2088.0	2073.5	2093.0	2102.7	2089.7
157.5°	2122.2	2109.2	2123.8	2135.3	2122.2
160°	2151.5	2141.6	2151.5	2161.1	2149.8
162.5°	2177.3	2167.7	2175.7	2187.2	2172.5
165°	2200.1	2190.5	2195.3	2206.7	2195.3
167.5°	2218.0	2208.2	2213.2	2224.7	2209.9
170°	2232.7	2222.9	2226.2	2237.5	2222.9
172.5°	2242.4	2232.7	2236.0	2247.4	2232.7
175°	2250.5	2239.1	2242.4	2253.7	2237.5
177.5°	2253.7	2242.4	2244.1	2255.5	2240.8
180°	2245.6	2245.6	2245.6	2245.6	2245.6

TEST NUMBER: P911483

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.89	11.75	11.82	12.69	13.92	6.85	7.71	7.79	8.66	9.88
	3H	12.57	13.34	13.52	14.29	15.54	8.04	8.81	8.99	9.77	11.02
	4H	13.18	13.91	14.14	14.87	16.13	8.50	9.22	9.46	10.18	11.44
	6H	13.61	14.28	14.58	15.24	16.51	8.82	9.49	9.79	10.45	11.72
	8H	13.74	14.37	14.71	15.35	16.62	8.91	9.55	9.89	10.53	11.80
	12H	13.80	14.40	14.78	15.38	16.67	8.96	9.56	9.94	10.54	11.83
4H	2H	10.91	11.63	11.88	12.60	13.85	7.45	8.18	8.42	9.14	10.40
	3H	12.74	13.35	13.72	14.34	15.61	8.81	9.41	9.78	10.40	11.67
	4H	13.44	13.99	14.42	14.97	16.27	9.36	9.91	10.34	10.89	12.19
	6H	13.96	14.43	14.96	15.44	16.73	9.78	10.25	10.77	11.26	12.55
	8H	14.14	14.58	15.13	15.58	16.89	9.91	10.35	10.91	11.35	12.66
	12H	14.23	14.63	15.25	15.65	16.96	9.98	10.37	10.99	11.39	12.70
8H	4H	13.41	13.85	14.41	14.85	16.16	9.64	10.08	10.64	11.08	12.39
	6H	13.98	14.34	15.00	15.39	16.69	10.16	10.53	11.18	11.57	12.87
	8H	14.20	14.52	15.23	15.55	16.87	10.35	10.67	11.38	11.70	13.03
	12H	14.34	14.62	15.37	15.65	17.02	10.47	10.76	11.51	11.78	13.15
12H	4H	13.36	13.76	14.38	14.78	16.09	9.65	10.05	10.66	11.06	12.37
	6H	13.96	14.28	14.99	15.31	16.63	10.21	10.53	11.24	11.56	12.89
	8H	14.18	14.46	15.21	15.49	16.85	10.42	10.71	11.46	11.73	13.10