

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911504

Luminaire Tested: DFN2DIP-PN4F0-080D120US850-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P911504  
REPORT IS A COMBINATION OF REPORTS P899761 AND P896497  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-PN4F0-080D120US850-FLLFLL  
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 20560.8 lumens  
Efficiency: N/A  
Efficacy: 113.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 180.7  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9971  
Total Harmonic Distortion (THDi): 0.049  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P911504  
CATALOG NUMBER: DFN2DIP-PN4F0-080D120US850-FLLFLL

### Luminous Intensity Polar Plot

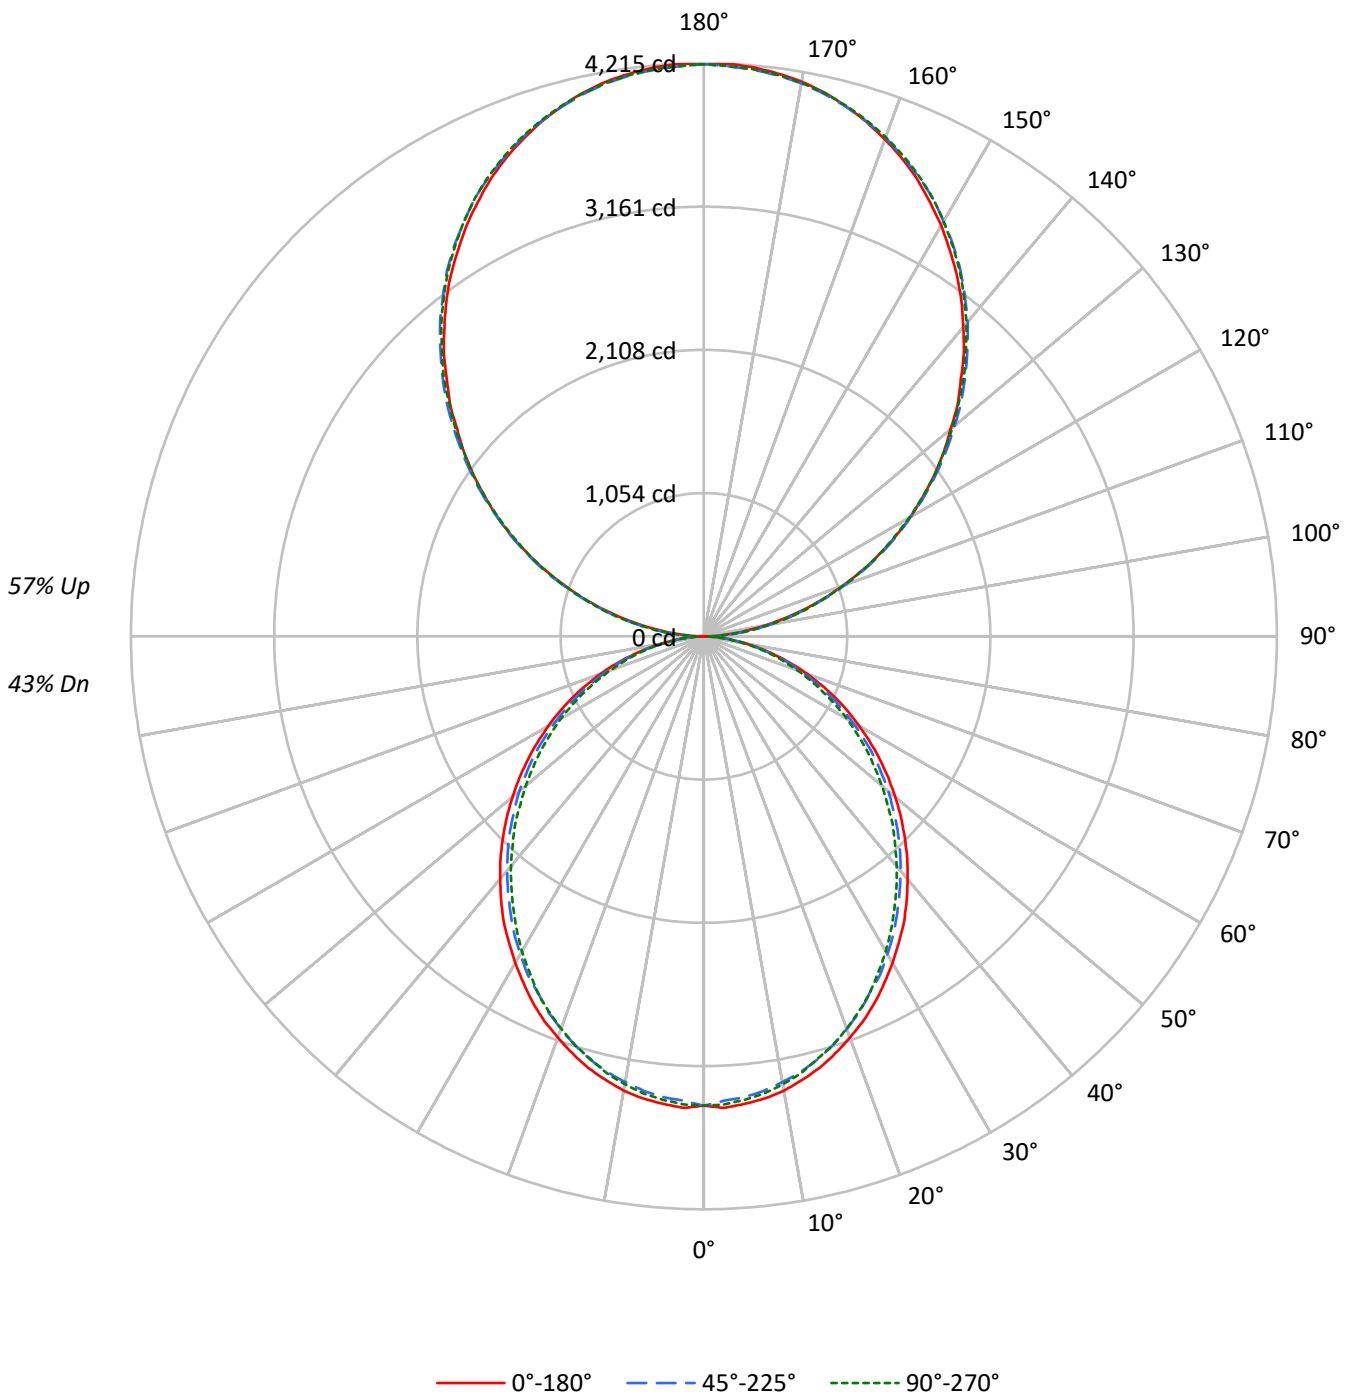



TEST NUMBER: P911504

CATALOG NUMBER: DFN2DIP-PN4F0-080D120US850-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	49	49	49	43
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	44	43	42	44	43	42	36
2	88	80	74	69	80	73	68	64	61	57	54	49	47	44	38	37	35	38	37	35	30
3	80	70	63	57	73	65	58	53	54	49	45	44	40	37	34	32	30	34	32	30	26
4	73	62	55	49	66	57	50	45	48	43	39	39	35	32	30	28	26	30	28	26	22
5	67	56	47	42	61	51	44	39	43	37	33	35	31	28	27	25	22	27	25	22	19
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20	25	22	20	17
7	57	45	37	31	52	41	34	29	35	29	25	29	24	21	23	20	18	23	20	18	15
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16	21	18	16	13
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	19	16	14	12
10	46	34	27	22	42	31	25	21	27	22	18	22	18	15	18	15	13	18	15	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2520	2520	2520
5°	2524	2485	2502
10°	2504	2452	2469
15°	2467	2412	2416
20°	2417	2356	2362
25°	2367	2290	2300
30°	2305	2227	2221
35°	2247	2154	2137
40°	2174	2080	2057
45°	2102	2006	1976
50°	2023	1928	1881
55°	1941	1838	1795
60°	1847	1731	1695
65°	1746	1621	1578
70°	1616	1486	1452
75°	1436	1325	1337
80°	1220	1119	1115
85°	883	764	746

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 3294 cd/sqm



TEST NUMBER: P911504

CATALOG NUMBER: DFN2DIP-PN4F0-080D120US850-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	324.9	1.6
10°-20°	914.2	4.4
20°-30°	1343.5	6.5
30°-40°	1560.4	7.6
40°-50°	1558.4	7.6
50°-60°	1358.9	6.6
60°-70°	1004.5	4.9
70°-80°	568.4	2.8
80°-90°	162.0	0.8
90°-100°	260.4	1.3
100°-110°	827.5	4.0
110°-120°	1416.1	6.9
120°-130°	1862.4	9.1
130°-140°	2090.5	10.2
140°-150°	2050.0	10.0
150°-160°	1719.6	8.4
160°-170°	1140.4	5.5
170°-180°	398.6	1.9
0°-30°	2582.6	12.6
0°-40°	4143.0	20.1
0°-60°	7060.4	34.3
0°-90°	8795.2	42.8
90°-120°	2504.0	12.2
90°-150°	8506.9	41.4
90°-180°	11766.0	57.2
0°-180°	20560.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	3452	3452	3452	3452	3452	
5°	3452	3439	3402	3429	3423	328
15°	3286	3267	3223	3237	3220	926
25°	2974	2948	2892	2898	2892	1369
35°	2566	2533	2480	2460	2443	1602
45°	2088	2065	2015	1979	1965	1612
55°	1580	1560	1520	1481	1464	1413
65°	1066	1046	1012	983	966	1054
75°	558	551	534	515	521	595
85°	136	133	130	119	116	152
90°	4	46	124	117	120	20
95°	185	221	227	227	221	206
105°	764	774	782	788	788	806
115°	1421	1442	1435	1431	1421	1406
125°	2067	2099	2089	2077	2073	1847
135°	2674	2713	2720	2717	2706	2066
145°	3246	3271	3291	3295	3281	2028
155°	3711	3722	3733	3751	3739	1708
165°	4038	4034	4034	4059	4041	1139
175°	4201	4191	4184	4209	4187	399
180°	4209	4209	4209	4209	4209	



TEST NUMBER: P911504

CATALOG NUMBER: DFN2DIP-PN4F0-080D120US850-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	3452.1	3452.1	3452.1	3452.1	3452.1
2.5°	3472.2	3455.6	3419.0	3452.1	3445.8
5°	3452.1	3439.1	3402.5	3428.9	3422.6
7.5°	3428.9	3409.2	3372.6	3399.3	3392.7
10°	3392.7	3369.4	3329.6	3355.9	3346.2
12.5°	3342.6	3322.9	3283.1	3299.6	3293.0
15°	3286.3	3266.6	3223.2	3236.6	3220.1
17.5°	3216.5	3196.8	3153.4	3170.1	3153.4
20°	3140.1	3120.4	3073.9	3083.8	3070.7
22.5°	3064.1	3034.1	2990.8	2990.8	2984.1
25°	2974.2	2947.8	2891.5	2897.8	2891.5
27.5°	2874.5	2851.3	2808.3	2798.5	2781.9
30°	2775.3	2748.4	2698.9	2689.0	2675.6
32.5°	2668.9	2649.2	2595.9	2575.9	2562.6
35°	2566.0	2533.0	2479.7	2459.7	2443.1
37.5°	2449.8	2419.8	2366.7	2343.4	2326.9
40°	2330.5	2303.6	2250.5	2220.9	2207.5
42.5°	2214.2	2187.4	2134.6	2101.1	2081.5
45°	2088.1	2064.8	2014.8	1978.6	1965.3
47.5°	1965.3	1942.0	1888.7	1852.1	1832.4
50°	1835.6	1819.1	1772.5	1726.0	1709.5
52.5°	1709.5	1686.2	1643.3	1606.7	1583.4
55°	1580.2	1560.1	1520.4	1480.6	1464.0
57.5°	1450.7	1434.2	1390.8	1351.0	1337.6
60°	1321.0	1308.1	1261.5	1224.9	1215.0
62.5°	1194.9	1171.8	1138.6	1105.6	1092.1
65°	1065.7	1045.7	1012.5	982.6	966.0
67.5°	932.9	916.0	886.4	863.2	849.8
70°	810.0	796.6	766.8	743.5	730.4
72.5°	683.9	670.6	654.0	630.8	620.9
75°	557.5	551.2	534.3	514.6	521.2
77.5°	444.8	431.4	424.7	414.9	405.0
80°	332.1	328.6	321.9	312.1	305.3
82.5°	225.8	225.8	222.6	209.2	209.2
85°	136.0	132.7	129.6	119.4	116.2
87.5°	59.9	53.2	46.5	36.6	33.2
90°	3.8	45.7	124.3	116.8	120.5
92.5°	78.6	106.6	110.3	114.2	114.2
95°	185.2	220.8	227.1	227.1	220.8
97.5°	308.3	341.4	355.3	355.3	355.3
100°	450.5	479.6	489.7	489.7	486.0
102.5°	600.2	621.7	635.7	639.6	635.7
105°	763.9	774.0	781.6	787.9	787.9
107.5°	926.2	941.5	941.5	944.0	926.2
110°	1083.6	1103.9	1103.9	1103.9	1093.8



TEST NUMBER: P911504

CATALOG NUMBER: DFN2DIP-PN4F0-080D120US850-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1253.6	1275.2	1271.4	1261.3	1253.6
115°	1421.1	1441.5	1435.0	1431.3	1421.1
117.5°	1587.3	1615.3	1597.5	1587.3	1577.2
120°	1754.9	1782.7	1754.9	1754.9	1743.5
122.5°	1907.1	1942.6	1924.9	1914.7	1907.1
125°	2067.0	2098.7	2088.6	2077.2	2073.3
127.5°	2223.1	2262.4	2248.4	2233.2	2223.1
130°	2368.9	2414.6	2408.3	2400.7	2386.7
132.5°	2532.6	2568.2	2570.7	2552.9	2542.8
135°	2673.5	2712.8	2720.5	2716.6	2706.5
137.5°	2830.8	2862.6	2868.9	2866.3	2851.1
140°	2969.1	3000.8	3018.6	3018.6	3004.6
142.5°	3111.3	3143.0	3153.1	3156.9	3143.0
145°	3245.7	3271.1	3291.4	3295.3	3281.3
147.5°	3366.3	3398.0	3413.3	3419.6	3405.6
150°	3490.7	3512.2	3526.2	3537.6	3526.2
152.5°	3601.0	3622.5	3640.4	3654.4	3640.4
155°	3711.4	3721.6	3733.0	3750.7	3739.3
157.5°	3806.6	3814.2	3820.5	3845.9	3828.2
160°	3891.6	3899.2	3903.0	3924.6	3909.3
162.5°	3970.2	3970.2	3974.1	3998.2	3980.4
165°	4037.5	4033.8	4033.8	4059.1	4041.3
167.5°	4098.4	4087.0	4087.0	4112.4	4094.6
170°	4144.1	4133.9	4130.1	4155.5	4133.9
172.5°	4175.8	4165.6	4161.9	4187.3	4165.6
175°	4201.2	4191.0	4183.5	4208.8	4187.3
177.5°	4215.2	4205.0	4197.3	4219.0	4197.3
180°	4208.8	4208.8	4208.8	4208.8	4208.8



TEST NUMBER: P911504  
 CATALOG NUMBER: DFN2DIP-PN4F0-080D120US850-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.78	10.58	10.80	11.61	12.98	9.34	10.14	10.36	11.17	12.54
	3H	11.44	12.16	12.47	13.19	14.58	10.96	11.67	11.98	12.71	14.10
	4H	12.03	12.71	13.07	13.74	15.14	11.54	12.22	12.58	13.26	14.65
	6H	12.43	13.05	13.47	14.09	15.50	11.93	12.56	12.98	13.60	15.01
	8H	12.53	13.13	13.58	14.18	15.59	12.04	12.63	13.09	13.69	15.10
	12H	12.58	13.14	13.64	14.19	15.62	12.08	12.64	13.14	13.69	15.12
4H	2H	10.24	10.92	11.28	11.95	13.35	9.88	10.56	10.93	11.60	13.00
	3H	12.10	12.67	13.15	13.73	15.14	11.70	12.26	12.75	13.33	14.74
	4H	12.81	13.33	13.87	14.39	15.82	12.40	12.92	13.46	13.97	15.40
	6H	13.33	13.77	14.40	14.85	16.28	12.90	13.35	13.97	14.43	15.86
	8H	13.48	13.89	14.55	14.97	16.41	13.05	13.47	14.12	14.54	15.98
	12H	13.55	13.93	14.64	15.01	16.46	13.11	13.49	14.20	14.57	16.02
8H	4H	13.00	13.42	14.07	14.49	15.94	12.63	13.05	13.70	14.12	15.57
	6H	13.64	13.98	14.73	15.10	16.54	13.26	13.61	14.35	14.72	16.16
	8H	13.86	14.16	14.96	15.26	16.72	13.47	13.78	14.57	14.87	16.33
	12H	13.99	14.26	15.09	15.35	16.85	13.59	13.85	14.69	14.95	16.45
12H	4H	12.99	13.37	14.08	14.45	15.90	12.63	13.00	13.71	14.09	15.54
	6H	13.67	13.97	14.77	15.07	16.53	13.30	13.60	14.40	14.70	16.16
	8H	13.91	14.17	15.01	15.27	16.77	13.54	13.80	14.64	14.89	16.39