

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911530

Luminaire Tested: DFN2DIP-PN4F0-090D090US850-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P911530  
REPORT IS A COMBINATION OF REPORTS P899710 AND P896497  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-PN4F0-090D090US850-RLLFLL  
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 17317.1 lumens  
Efficiency: N/A  
Efficacy: 111.7 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 155  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9963  
Total Harmonic Distortion (THDi): 0.065  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P911530  
CATALOG NUMBER: DFN2DIP-PN4F0-090D090US850-RLLFLL

### Luminous Intensity Polar Plot

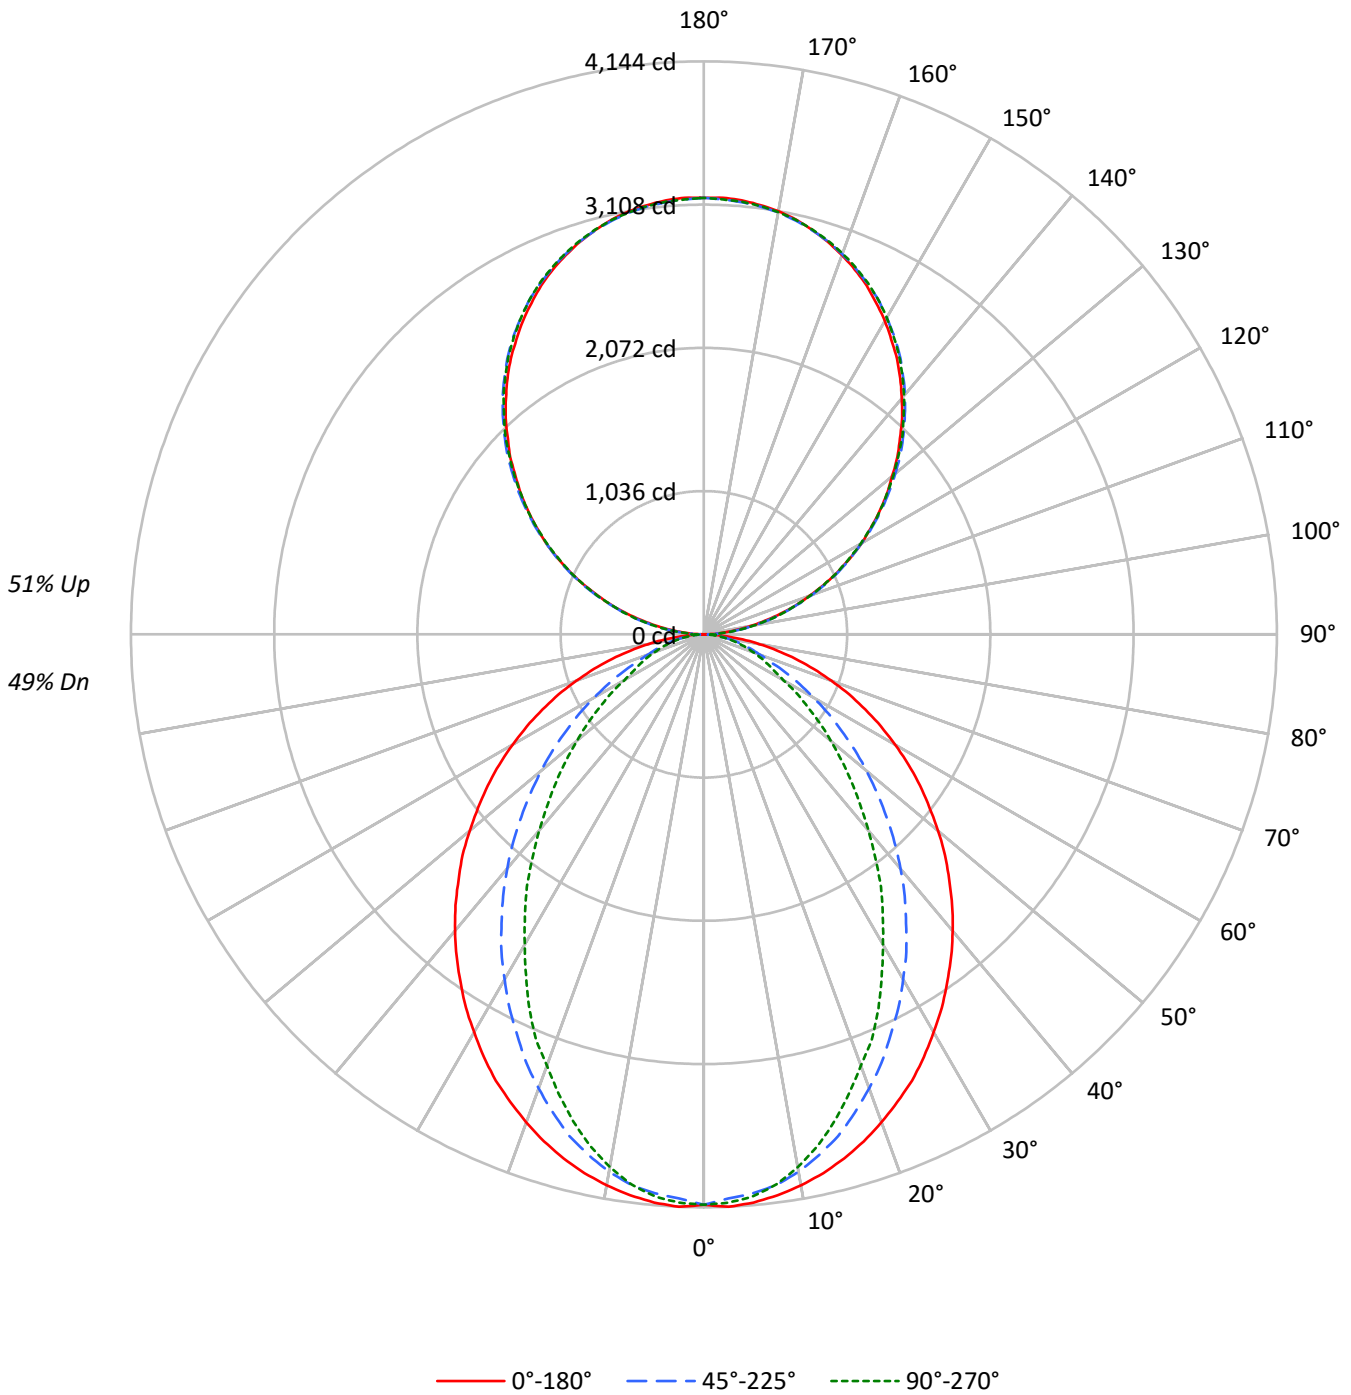



TEST NUMBER: P911530

CATALOG NUMBER: DFN2DIP-PN4F0-090D090US850-RLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55	49				49
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48	42				42
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41	36				36
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35	31				31
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31	27				27
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27	24				24
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24	21				21
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22	19				19
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20	17				17
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18	16				16
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16	14				14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3011	3011	3011
5°	3016	2964	2983
10°	2986	2906	2886
15°	2945	2810	2737
20°	2891	2678	2553
25°	2835	2530	2376
30°	2760	2378	2151
35°	2687	2215	1953
40°	2612	2046	1726
45°	2526	1859	1520
50°	2436	1669	1319
55°	2343	1467	1126
60°	2234	1255	927
65°	2110	1040	835
70°	1959	839	757
75°	1769	741	690
80°	1495	622	600
85°	1041	418	455

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2526 cd/sqm



TEST NUMBER: P911530

CATALOG NUMBER: DFN2DIP-PN4F0-090D090US850-RLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	386.6	2.2
10°-20°	1061.3	6.1
20°-30°	1490.1	8.6
30°-40°	1624.3	9.4
40°-50°	1492.9	8.6
50°-60°	1172.4	6.8
60°-70°	763.1	4.4
70°-80°	392.8	2.3
80°-90°	109.3	0.6
90°-100°	195.3	1.1
100°-110°	620.6	3.6
110°-120°	1062.1	6.1
120°-130°	1396.8	8.1
130°-140°	1567.9	9.1
140°-150°	1537.5	8.9
150°-160°	1289.7	7.4
160°-170°	855.3	4.9
170°-180°	299.0	1.7
0°-30°	2938.0	17.0
0°-40°	4562.3	26.3
0°-60°	7227.6	41.7
0°-90°	8492.9	49.0
90°-120°	1878.1	10.8
90°-150°	6380.2	36.8
90°-180°	8824.0	51.0
0°-180°	17317.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	4125	4125	4125	4125	4125	
5°	4125	4106	4058	4091	4080	391
15°	3924	3882	3756	3685	3648	1106
25°	3562	3442	3196	3043	2986	1638
35°	3069	2878	2550	2315	2232	1921
45°	2509	2258	1867	1601	1512	1937
55°	1908	1616	1213	989	918	1705
65°	1288	986	650	523	511	1277
75°	687	425	299	272	269	726
85°	160	82	71	71	71	184
90°	3	34	93	88	90	17
95°	139	166	170	170	166	155
105°	573	580	586	591	591	605
115°	1066	1081	1076	1074	1066	1054
125°	1550	1574	1566	1558	1555	1385
135°	2005	2035	2040	2038	2030	1550
145°	2434	2453	2468	2471	2461	1521
155°	2784	2791	2800	2813	2805	1281
165°	3028	3025	3025	3044	3031	854
175°	3151	3143	3138	3157	3140	299
180°	3157	3157	3157	3157	3157	



TEST NUMBER: P911530

CATALOG NUMBER: DFN2DIP-PN4F0-090D090US850-RLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	4125.1	4125.1	4125.1	4125.1	4125.1
2.5°	4143.8	4125.1	4083.9	4121.6	4114.1
5°	4125.1	4106.5	4057.8	4091.4	4080.3
7.5°	4091.4	4069.3	4017.0	4031.7	4013.0
10°	4046.7	4020.6	3946.2	3934.6	3912.4
12.5°	3990.8	3957.2	3856.2	3834.0	3792.8
15°	3923.5	3882.4	3755.6	3684.7	3647.5
17.5°	3845.1	3785.3	3628.4	3546.5	3486.7
20°	3755.6	3680.8	3494.1	3401.1	3318.7
22.5°	3658.6	3572.6	3355.9	3229.2	3173.4
25°	3561.6	3441.9	3195.6	3042.7	2986.4
27.5°	3445.9	3318.7	3046.2	2870.8	2784.8
30°	3322.7	3180.5	2881.8	2691.8	2590.7
32.5°	3203.0	3031.1	2725.4	2501.2	2407.7
35°	3068.8	2878.3	2549.9	2314.7	2232.3
37.5°	2938.1	2732.6	2385.6	2127.7	2034.7
40°	2799.9	2576.1	2213.7	1948.7	1851.7
42.5°	2658.1	2419.3	2042.1	1765.7	1672.6
45°	2508.8	2258.5	1866.7	1601.3	1511.8
47.5°	2366.9	2102.0	1698.8	1433.4	1351.4
50°	2210.1	1945.1	1534.4	1276.6	1198.5
52.5°	2056.9	1776.8	1377.6	1131.2	1060.3
55°	1907.5	1616.4	1213.1	989.4	918.5
57.5°	1754.7	1456.0	1067.9	858.7	798.9
60°	1597.7	1299.1	914.6	724.4	664.6
62.5°	1444.9	1146.3	783.8	604.8	575.1
65°	1288.0	985.5	649.5	522.8	511.4
67.5°	1138.7	836.1	522.8	459.0	447.9
70°	981.9	690.8	433.0	395.7	380.6
72.5°	832.5	556.1	362.0	332.3	324.8
75°	686.8	425.4	298.7	272.5	268.9
77.5°	541.4	302.2	235.2	220.2	212.7
80°	406.8	216.7	179.0	164.4	164.4
82.5°	283.6	145.7	123.2	115.7	115.7
85°	160.4	82.0	70.9	70.9	70.9
87.5°	59.8	29.7	29.7	26.2	26.2
90°	2.9	34.3	93.3	87.5	90.4
92.5°	59.0	80.0	82.8	85.6	85.6
95°	139.0	165.6	170.3	170.3	165.6
97.5°	231.2	256.0	266.5	266.5	266.5
100°	337.8	359.8	367.3	367.3	364.5
102.5°	450.1	466.3	476.8	479.6	476.8
105°	572.9	580.5	586.2	591.0	591.0
107.5°	694.7	706.1	706.1	708.0	694.7
110°	812.7	828.0	828.0	828.0	820.3



TEST NUMBER: P911530

CATALOG NUMBER: DFN2DIP-PN4F0-090D090US850-RLFL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	940.2	956.4	953.5	946.0	940.2
115°	1065.9	1081.1	1076.3	1073.5	1065.9
117.5°	1190.5	1211.5	1198.2	1190.5	1182.9
120°	1316.2	1337.0	1316.2	1316.2	1307.5
122.5°	1430.3	1457.0	1443.7	1436.0	1430.3
125°	1550.3	1574.0	1566.5	1557.8	1555.0
127.5°	1667.3	1696.8	1686.3	1674.9	1667.3
130°	1776.7	1811.0	1806.2	1800.5	1790.0
132.5°	1899.5	1926.1	1928.0	1914.7	1907.1
135°	2005.1	2034.6	2040.3	2037.5	2029.9
137.5°	2123.1	2146.9	2151.7	2149.8	2138.4
140°	2226.9	2250.6	2263.9	2263.9	2253.5
142.5°	2333.4	2357.2	2364.8	2367.7	2357.2
145°	2434.4	2453.3	2468.5	2471.4	2461.0
147.5°	2524.7	2548.5	2559.9	2564.7	2554.2
150°	2618.0	2634.2	2644.6	2653.2	2644.6
152.5°	2700.7	2716.9	2730.2	2740.8	2730.2
155°	2783.6	2791.1	2799.8	2813.1	2804.6
157.5°	2854.9	2860.7	2865.4	2884.4	2871.1
160°	2918.7	2924.4	2927.3	2943.4	2932.0
162.5°	2977.7	2977.7	2980.5	2998.6	2985.3
165°	3028.1	3025.2	3025.2	3044.3	3031.0
167.5°	3073.8	3065.3	3065.3	3084.2	3070.9
170°	3108.1	3100.4	3097.7	3116.6	3100.4
172.5°	3131.8	3124.3	3121.4	3140.5	3124.3
175°	3150.9	3143.2	3137.6	3156.7	3140.5
177.5°	3161.3	3153.8	3148.0	3164.2	3148.0
180°	3156.7	3156.7	3156.7	3156.7	3156.7



TEST NUMBER: P911530  
 CATALOG NUMBER: DFN2DIP-PN4F0-090D090US850-RLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.89	11.71	11.86	12.70	13.98	6.86	7.68	7.83	8.66	9.95
	3H	12.57	13.31	13.56	14.30	15.61	8.05	8.78	9.03	9.77	11.08
	4H	13.18	13.88	14.18	14.87	16.19	8.50	9.19	9.49	10.19	11.50
	6H	13.61	14.25	14.61	15.24	16.57	8.82	9.46	9.82	10.46	11.79
	8H	13.73	14.34	14.75	15.36	16.68	8.91	9.52	9.92	10.53	11.86
	12H	13.80	14.37	14.81	15.38	16.73	8.95	9.53	9.97	10.54	11.89
4H	2H	10.91	11.60	11.91	12.60	13.92	7.45	8.15	8.46	9.14	10.46
	3H	12.74	13.32	13.75	14.34	15.67	8.80	9.38	9.81	10.40	11.74
	4H	13.44	13.96	14.45	14.98	16.33	9.35	9.88	10.37	10.90	12.25
	6H	13.95	14.41	14.98	15.45	16.80	9.77	10.23	10.80	11.26	12.62
	8H	14.13	14.55	15.16	15.58	16.95	9.90	10.32	10.93	11.36	12.72
	12H	14.23	14.61	15.27	15.66	17.03	9.97	10.35	11.01	11.40	12.77
8H	4H	13.40	13.83	14.43	14.86	16.22	9.63	10.06	10.66	11.09	12.45
	6H	13.97	14.32	15.03	15.40	16.76	10.15	10.50	11.21	11.58	12.94
	8H	14.19	14.50	15.25	15.56	16.94	10.34	10.65	11.41	11.71	13.09
	12H	14.33	14.60	15.40	15.65	17.08	10.46	10.73	11.53	11.79	13.21
12H	4H	13.35	13.74	14.40	14.78	16.15	9.64	10.02	10.69	11.07	12.44
	6H	13.95	14.25	15.01	15.31	16.70	10.20	10.51	11.26	11.57	12.95
	8H	14.17	14.44	15.23	15.49	16.92	10.41	10.68	11.48	11.74	13.16