

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911575

Luminaire Tested: DFN2DIP-PN4F0-100D110US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911575
REPORT IS A COMBINATION OF REPORTS P901268 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-100D110US850-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 21503.5 lumens
Efficiency: N/A
Efficacy: 111.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 192.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911575

CATALOG NUMBER: DFN2DIP-PN4F0-100D110US850-RLLONL

Luminous Intensity Polar Plot

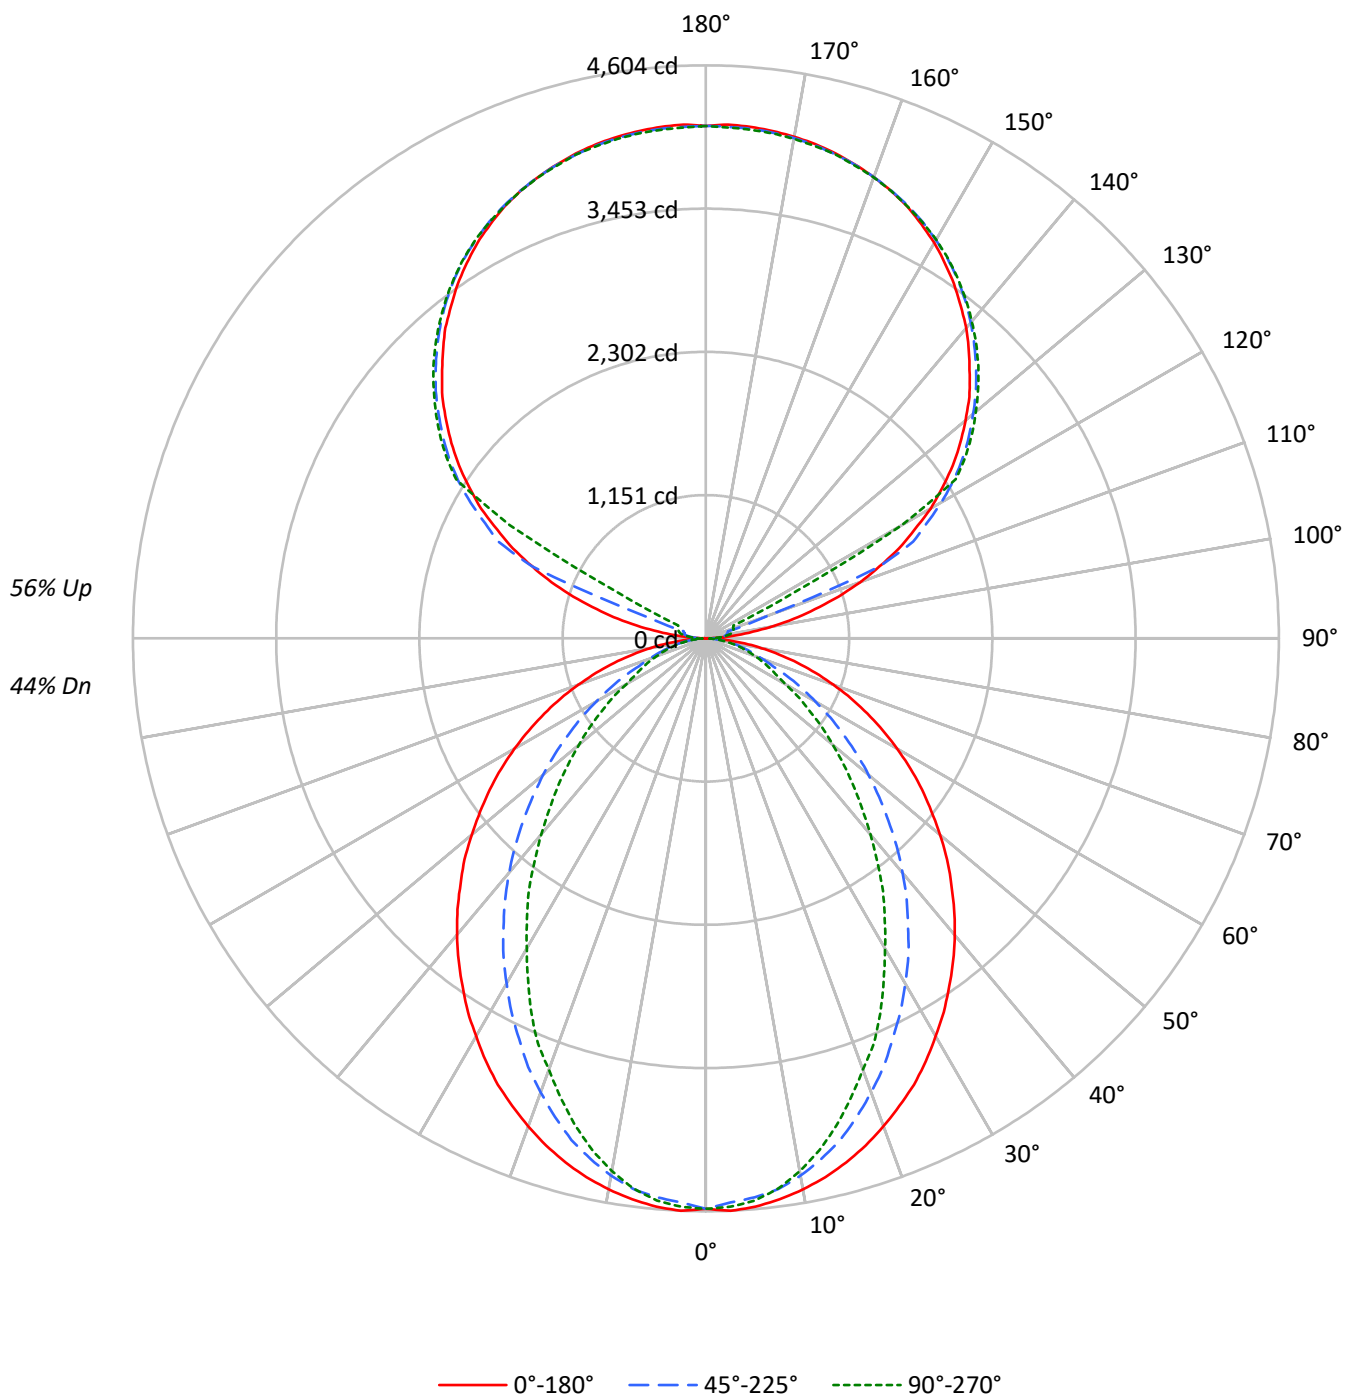

TEST NUMBER: P911575

CATALOG NUMBER: DFN2DIP-PN4F0-100D110US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	50	50	50
1	97	93	89	86	89	85	82	79	71	68	66	57	56	55	45	44	43
2	89	81	76	71	81	75	70	66	62	59	56	51	48	46	40	39	37
3	81	72	65	59	74	66	60	55	55	51	47	45	42	40	36	34	32
4	74	64	56	51	68	59	52	47	49	45	41	41	37	34	33	30	28
5	68	57	49	44	62	53	46	41	44	39	35	37	33	30	30	27	25
6	63	51	44	38	58	47	41	36	40	35	31	33	29	26	27	24	22
7	58	46	39	33	53	43	36	31	37	31	27	30	26	24	25	22	20
8	54	42	35	30	50	39	33	28	33	28	24	28	24	21	23	20	18
9	50	39	31	26	46	36	29	25	31	26	22	26	22	19	21	18	16
10	47	35	28	24	43	33	27	22	28	23	20	24	20	17	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3346	3346	3346
5°	3351	3293	3314
10°	3318	3229	3207
15°	3272	3123	3041
20°	3212	2976	2837
25°	3150	2811	2640
30°	3067	2643	2389
35°	2985	2461	2170
40°	2903	2274	1918
45°	2806	2065	1689
50°	2707	1855	1466
55°	2603	1630	1251
60°	2483	1395	1030
65°	2344	1155	928
70°	2176	932	841
75°	1966	823	766
80°	1660	692	667
85°	1157	464	505

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2806 cd/sqm

TEST NUMBER: P911575

CATALOG NUMBER: DFN2DIP-PN4F0-100D110US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	429.6	2.0
10°-20°	1179.3	5.5
20°-30°	1655.6	7.7
30°-40°	1804.7	8.4
40°-50°	1658.8	7.7
50°-60°	1302.7	6.1
60°-70°	847.9	3.9
70°-80°	436.5	2.0
80°-90°	118.7	0.6
90°-100°	135.7	0.6
100°-110°	506.1	2.4
110°-120°	1342.2	6.2
120°-130°	2226.1	10.4
130°-140°	2364.7	11.0
140°-150°	2197.7	10.2
150°-160°	1766.9	8.2
160°-170°	1138.5	5.3
170°-180°	391.9	1.8
0°-30°	3264.5	15.2
0°-40°	5069.2	23.6
0°-60°	8030.6	37.3
0°-90°	9433.7	43.9
90°-120°	1984.0	9.2
90°-150°	8772.5	40.8
90°-180°	12070.0	56.1
0°-180°	21503.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4584	4584	4584	4584	4584	
5°	4584	4563	4509	4546	4534	435
15°	4360	4314	4173	4094	4053	1228
25°	3957	3824	3551	3381	3318	1820
35°	3410	3198	2833	2572	2480	2134
45°	2788	2509	2074	1779	1680	2153
55°	2119	1796	1348	1099	1020	1894
65°	1431	1095	722	581	568	1419
75°	763	473	332	303	299	807
85°	178	91	79	79	79	205
90°	3	36	59	75	80	20
95°	194	95	116	131	128	229
105°	906	995	182	214	226	968
115°	1713	1763	1838	459	244	1686
125°	2422	2461	2517	2538	2547	2160
135°	2997	3045	3071	3101	3095	2315
145°	3477	3474	3524	3545	3530	2174
155°	3828	3801	3837	3855	3831	1764
165°	4034	4016	4025	4046	4025	1140
175°	4126	4105	4111	4132	4102	393
180°	4117	4117	4117	4117	4117	

TEST NUMBER: P911575

CATALOG NUMBER: DFN2DIP-PN4F0-100D110US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4583.5	4583.5	4583.5	4583.5	4583.5
2.5°	4604.1	4583.5	4537.7	4579.5	4571.2
5°	4583.5	4562.8	4508.6	4546.1	4533.7
7.5°	4546.1	4521.4	4463.3	4479.6	4459.0
10°	4496.3	4467.3	4384.5	4371.8	4347.2
12.5°	4434.3	4396.9	4284.6	4260.0	4214.2
15°	4359.5	4313.7	4172.8	4094.1	4052.7
17.5°	4272.3	4205.9	4031.7	3940.5	3874.1
20°	4172.8	4089.7	3882.4	3779.0	3687.4
22.5°	4065.0	3969.6	3728.8	3588.1	3526.0
25°	3957.2	3824.4	3550.6	3380.7	3318.2
27.5°	3828.7	3687.4	3384.7	3189.7	3094.2
30°	3691.9	3533.8	3202.0	2990.9	2878.6
32.5°	3559.0	3367.9	3028.2	2779.2	2675.2
35°	3409.7	3198.1	2833.3	2571.9	2480.3
37.5°	3264.6	3036.1	2650.6	2364.2	2260.7
40°	3111.0	2862.3	2459.7	2165.2	2057.4
42.5°	2953.4	2688.0	2269.1	1961.9	1858.5
45°	2787.5	2509.3	2074.2	1779.3	1679.8
47.5°	2630.0	2335.6	1887.5	1592.6	1501.6
50°	2455.7	2161.2	1704.9	1418.4	1331.7
52.5°	2285.3	1974.2	1530.6	1256.8	1178.1
55°	2119.4	1796.0	1348.0	1099.4	1020.5
57.5°	1949.6	1617.7	1186.5	954.1	887.6
60°	1775.3	1443.5	1016.2	804.9	738.5
62.5°	1605.4	1273.6	870.9	672.1	639.0
65°	1431.2	1094.9	721.7	580.9	568.1
67.5°	1265.3	929.0	580.9	510.0	497.7
70°	1090.9	767.5	481.0	439.6	423.0
72.5°	925.0	617.8	402.2	369.2	360.9
75°	763.1	472.7	331.8	302.8	298.8
77.5°	601.6	335.8	261.4	244.6	236.3
80°	451.9	240.8	199.0	182.7	182.7
82.5°	315.1	161.9	136.9	128.5	128.5
85°	178.2	91.0	78.7	78.7	78.7
87.5°	66.4	33.0	33.0	29.1	29.1
90°	2.9	35.7	59.4	74.6	80.3
92.5°	74.6	62.7	71.4	77.5	80.3
95°	193.5	95.2	116.0	131.2	128.1
97.5°	348.4	104.4	151.7	160.9	163.8
100°	527.4	119.2	169.8	193.5	199.5
102.5°	723.7	718.1	175.8	208.4	217.6
105°	905.6	995.1	181.9	214.4	226.5
107.5°	1117.2	1191.4	187.9	220.4	232.4
110°	1319.8	1382.1	521.5	223.6	235.2

TEST NUMBER: P911575

CATALOG NUMBER: DFN2DIP-PN4F0-100D110US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1510.6	1563.9	1513.3	229.2	238.4
115°	1712.9	1763.4	1838.2	458.8	244.4
117.5°	1888.7	1948.2	1999.1	1572.8	792.4
120°	2085.4	2129.9	2183.7	2219.4	1817.2
122.5°	2252.0	2299.7	2359.5	2377.3	2380.5
125°	2421.8	2460.8	2517.3	2538.2	2547.0
127.5°	2576.8	2618.5	2663.4	2693.1	2696.0
130°	2722.8	2770.6	2803.1	2836.0	2833.3
132.5°	2871.8	2910.7	2943.3	2970.1	2967.4
135°	2997.1	3044.8	3071.3	3101.4	3095.3
137.5°	3127.9	3163.6	3193.7	3223.4	3214.5
140°	3256.0	3280.0	3312.6	3339.4	3324.6
142.5°	3363.5	3384.3	3422.9	3446.7	3431.8
145°	3476.7	3473.5	3524.1	3545.0	3530.2
147.5°	3574.8	3565.9	3616.4	3631.3	3619.7
150°	3670.2	3649.4	3697.1	3714.8	3700.0
152.5°	3750.5	3726.8	3771.4	3789.5	3768.6
155°	3828.0	3801.4	3837.1	3854.9	3831.2
157.5°	3890.6	3866.9	3893.8	3914.7	3890.6
160°	3944.4	3926.3	3944.4	3962.0	3941.2
162.5°	3991.7	3974.1	3989.0	4009.8	3983.0
165°	4033.5	4015.8	4024.7	4045.5	4024.7
167.5°	4066.4	4048.4	4057.6	4078.5	4051.6
170°	4093.3	4075.2	4081.2	4102.2	4075.2
172.5°	4111.0	4093.3	4099.3	4120.2	4093.3
175°	4125.8	4105.0	4111.0	4131.9	4102.2
177.5°	4131.9	4111.0	4114.2	4135.0	4108.2
180°	4117.1	4117.1	4117.1	4117.1	4117.1

TEST NUMBER: P911575

CATALOG NUMBER: DFN2DIP-PN4F0-100D110US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.75	11.53	11.76	12.55	13.91	6.71	7.50	7.73	8.52	9.87
	3H	12.43	13.13	13.45	14.15	15.53	7.90	8.60	8.92	9.63	11.01
	4H	13.03	13.70	14.07	14.73	16.11	8.35	9.01	9.39	10.04	11.43
	6H	13.46	14.07	14.50	15.10	16.50	8.67	9.28	9.72	10.31	11.71
	8H	13.58	14.16	14.63	15.21	16.61	8.76	9.34	9.81	10.39	11.78
	12H	13.64	14.19	14.70	15.24	16.66	8.80	9.35	9.86	10.40	11.81
4H	2H	10.76	11.42	11.81	12.45	13.84	7.31	7.97	8.35	9.00	10.39
	3H	12.59	13.14	13.64	14.20	15.60	8.65	9.20	9.70	10.26	11.66
	4H	13.28	13.79	14.34	14.84	16.26	9.20	9.70	10.26	10.75	12.18
	6H	13.80	14.23	14.86	15.30	16.72	9.62	10.05	10.68	11.12	12.54
	8H	13.97	14.38	15.04	15.44	16.88	9.75	10.15	10.81	11.22	12.65
	12H	14.07	14.43	15.15	15.51	16.95	9.81	10.17	10.89	11.25	12.69
8H	4H	13.25	13.65	14.31	14.72	16.15	9.48	9.88	10.54	10.95	12.38
	6H	13.81	14.15	14.90	15.26	16.68	10.00	10.33	11.09	11.44	12.87
	8H	14.03	14.32	15.13	15.42	16.86	10.19	10.48	11.28	11.57	13.02
	12H	14.17	14.43	15.27	15.51	17.00	10.31	10.56	11.41	11.65	13.14
12H	4H	13.20	13.56	14.28	14.64	16.08	9.48	9.85	10.57	10.93	12.36
	6H	13.79	14.08	14.89	15.17	16.62	10.05	10.34	11.14	11.43	12.88
	8H	14.01	14.27	15.11	15.35	16.84	10.26	10.51	11.36	11.60	13.09