

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911587

Luminaire Tested: DFN2DIP-PN4F0-110D050US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911587
REPORT IS A COMBINATION OF REPORTS P901162 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-110D050US850-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15858.7 lumens
Efficiency: N/A
Efficacy: 104.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 151.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911587

CATALOG NUMBER: DFN2DIP-PN4F0-110D050US850-RLLONL

Luminous Intensity Polar Plot

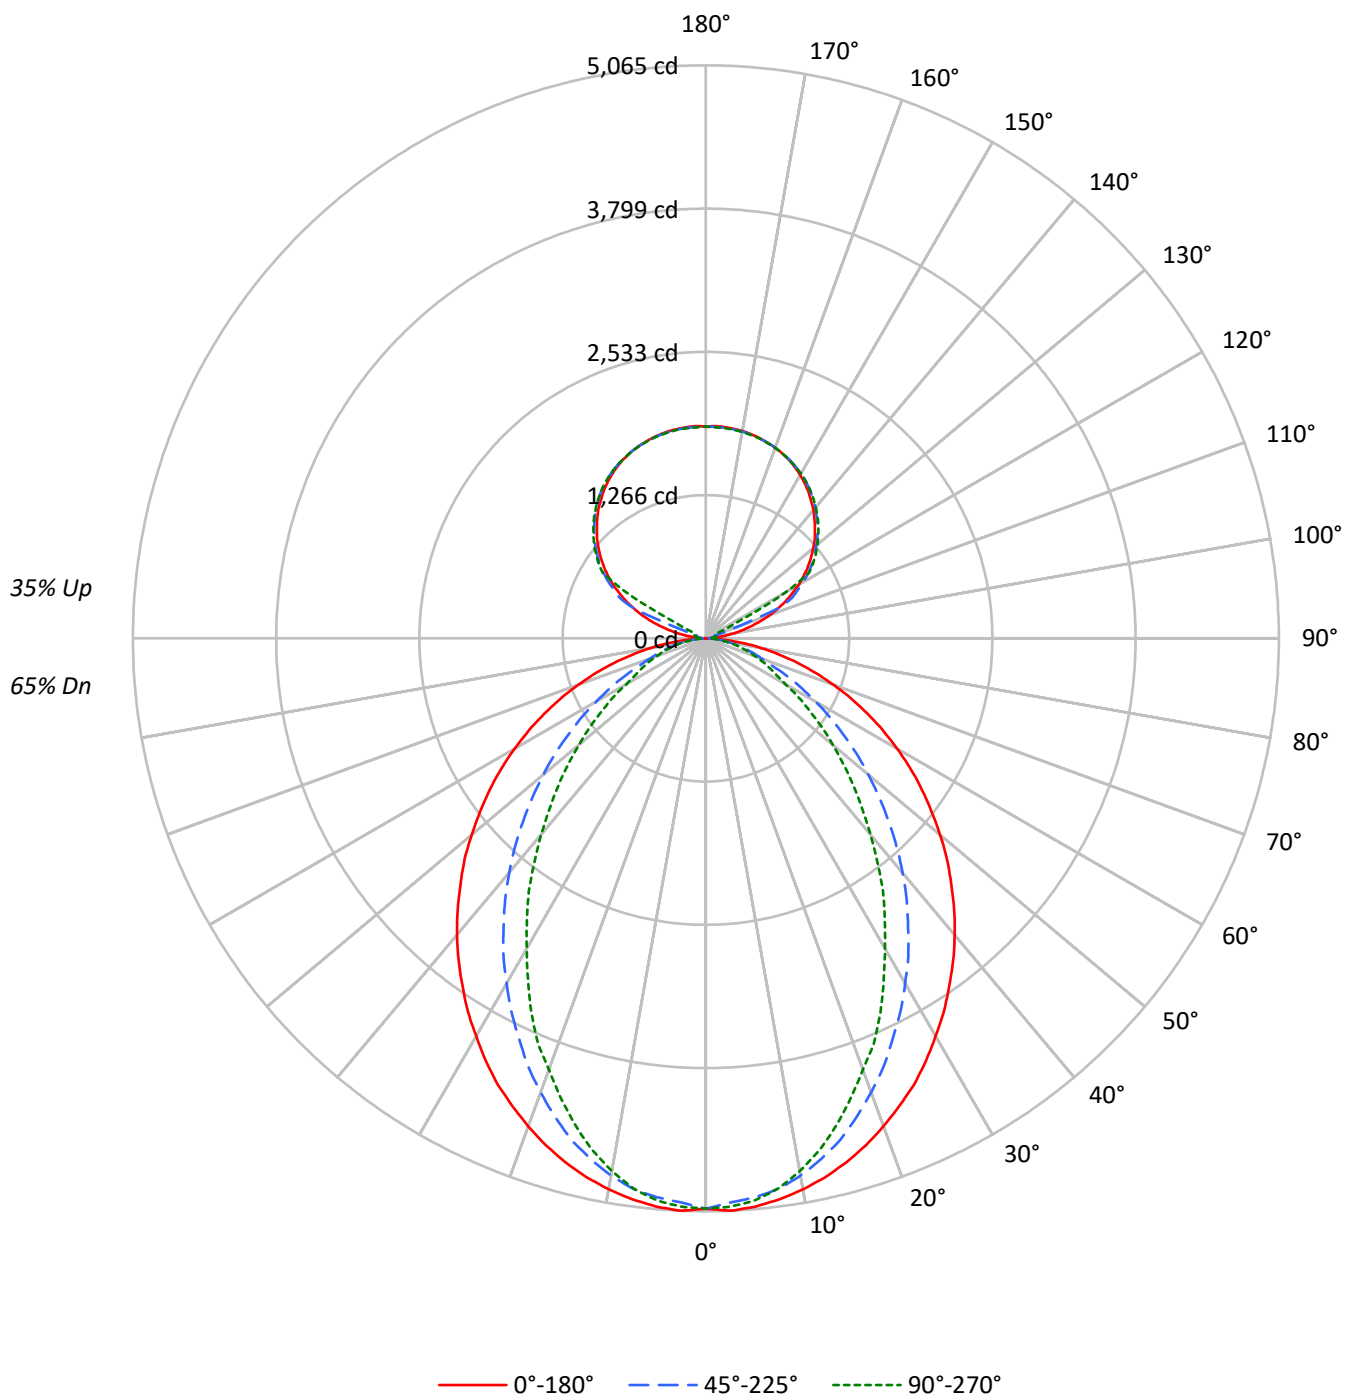

TEST NUMBER: P911587

CATALOG NUMBER: DFN2DIP-PN4F0-110D050US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	70	70	70
1	102	98	94	91	96	92	89	86	82	79	77	72	70	69	63	62	61
2	93	86	80	75	88	81	76	72	72	68	65	64	61	58	56	54	52
3	86	76	69	63	80	72	66	61	64	59	55	57	53	50	50	48	45
4	79	68	60	54	74	64	57	52	58	52	48	51	47	43	46	42	39
5	72	61	53	47	68	58	51	45	52	46	42	46	42	38	41	38	35
6	67	55	47	41	63	52	45	40	47	41	37	42	37	34	38	34	31
7	62	50	42	37	59	48	40	35	43	37	33	39	34	30	35	31	28
8	58	46	38	33	55	44	36	32	39	34	29	36	31	27	32	28	25
9	54	42	34	29	51	40	33	28	36	31	27	33	28	25	30	26	23
10	51	39	31	27	48	37	30	26	34	28	24	31	26	23	28	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3680	3680	3680
5°	3686	3622	3646
10°	3650	3552	3528
15°	3599	3435	3345
20°	3533	3274	3121
25°	3465	3093	2904
30°	3373	2907	2628
35°	3284	2707	2387
40°	3193	2501	2109
45°	3087	2272	1858
50°	2977	2040	1612
55°	2863	1793	1376
60°	2731	1534	1133
65°	2579	1271	1021
70°	2394	1025	925
75°	2162	905	843
80°	1827	761	734
85°	1273	510	556

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3087 cd/sqm

TEST NUMBER: P911587

CATALOG NUMBER: DFN2DIP-PN4F0-110D050US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	472.5	3.0
10°-20°	1297.2	8.2
20°-30°	1821.2	11.5
30°-40°	1985.2	12.5
40°-50°	1824.6	11.5
50°-60°	1433.0	9.0
60°-70°	932.7	5.9
70°-80°	480.1	3.0
80°-90°	125.9	0.8
90°-100°	61.7	0.4
100°-110°	230.0	1.5
110°-120°	610.1	3.8
120°-130°	1011.9	6.4
130°-140°	1074.8	6.8
140°-150°	999.0	6.3
150°-160°	803.1	5.1
160°-170°	517.5	3.3
170°-180°	178.1	1.1
0°-30°	3590.9	22.6
0°-40°	5576.1	35.2
0°-60°	8833.7	55.7
0°-90°	10372.5	65.4
90°-120°	901.9	5.7
90°-150°	3987.5	25.1
90°-180°	5486.0	34.6
0°-180°	15858.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5042	5042	5042	5042	5042	
5°	5042	5019	4960	5001	4987	478
15°	4795	4745	4590	4504	4458	1351
25°	4353	4207	3906	3719	3650	2002
35°	3751	3518	3117	2829	2728	2348
45°	3066	2760	2282	1957	1848	2368
55°	2331	1976	1483	1209	1123	2083
65°	1574	1204	794	639	625	1561
75°	839	520	365	333	329	888
85°	196	100	87	87	87	225
90°	1	16	27	34	36	15
95°	88	43	53	60	58	104
105°	412	452	83	98	103	440
115°	779	802	836	209	111	767
125°	1101	1118	1144	1154	1158	982
135°	1362	1384	1396	1410	1407	1052
145°	1580	1579	1602	1611	1605	988
155°	1740	1728	1744	1752	1742	802
165°	1833	1825	1829	1839	1829	518
175°	1875	1866	1869	1878	1865	178
180°	1871	1871	1871	1871	1871	

TEST NUMBER: P911587

CATALOG NUMBER: DFN2DIP-PN4F0-110D050US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5041.8	5041.8	5041.8	5041.8	5041.8
2.5°	5064.6	5041.8	4991.5	5037.5	5028.3
5°	5041.8	5019.1	4959.6	5000.7	4987.2
7.5°	5000.7	4973.5	4909.7	4927.6	4904.8
10°	4946.0	4914.0	4823.0	4809.0	4781.9
12.5°	4877.7	4836.6	4713.1	4686.0	4635.6
15°	4795.4	4745.1	4590.2	4503.5	4458.0
17.5°	4699.6	4626.5	4434.8	4334.5	4261.4
20°	4590.2	4498.7	4270.6	4156.9	4056.2
22.5°	4471.6	4366.5	4101.7	3946.8	3878.5
25°	4352.9	4206.8	3905.7	3718.8	3650.1
27.5°	4211.6	4056.2	3723.1	3508.7	3403.6
30°	4061.0	3887.3	3522.3	3289.8	3166.4
32.5°	3914.9	3704.7	3331.0	3057.1	2942.8
35°	3750.7	3517.9	3116.6	2829.1	2728.4
37.5°	3591.1	3339.8	2915.7	2600.5	2486.8
40°	3422.0	3148.6	2705.6	2381.7	2263.1
42.5°	3248.7	2956.8	2496.0	2158.1	2044.3
45°	3066.3	2760.3	2281.5	1957.2	1847.8
47.5°	2892.9	2569.1	2076.3	1751.9	1651.7
50°	2701.2	2377.4	1875.4	1560.3	1464.9
52.5°	2513.9	2171.6	1683.7	1382.6	1295.9
55°	2331.3	1975.6	1482.7	1209.3	1122.6
57.5°	2144.6	1779.5	1305.1	1049.6	976.4
60°	1952.8	1587.9	1117.8	885.4	812.3
62.5°	1766.0	1401.0	958.1	739.3	702.9
65°	1574.2	1204.4	793.9	639.0	624.9
67.5°	1391.8	1021.9	639.0	561.0	547.5
70°	1200.0	844.3	529.1	483.6	465.2
72.5°	1017.5	679.7	442.5	406.1	396.9
75°	839.4	519.9	365.0	333.0	328.7
77.5°	661.7	369.4	287.6	269.2	259.9
80°	497.2	264.8	218.8	201.0	201.0
82.5°	346.6	178.1	150.6	141.4	141.4
85°	196.1	100.3	86.6	86.6	86.6
87.5°	73.1	36.3	36.3	31.9	31.9
90°	1.3	16.2	27.1	33.9	36.5
92.5°	33.9	28.5	32.5	35.3	36.5
95°	87.9	43.3	52.8	59.7	58.2
97.5°	158.4	47.5	69.0	73.2	74.4
100°	239.8	54.2	77.2	87.9	90.7
102.5°	329.0	326.4	80.0	94.7	98.9
105°	411.7	452.4	82.6	97.5	102.9
107.5°	507.8	541.5	85.4	100.1	105.7
110°	600.0	628.2	237.0	101.6	106.9



TEST NUMBER: P911587

CATALOG NUMBER: DFN2DIP-PN4F0-110D050US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	686.6	710.9	687.9	104.2	108.3
115°	778.6	801.6	835.5	208.6	111.1
117.5°	858.5	885.5	908.7	714.9	360.2
120°	947.9	968.2	992.6	1008.9	826.0
122.5°	1023.6	1045.3	1072.5	1080.6	1082.1
125°	1100.8	1118.5	1144.3	1153.7	1157.8
127.5°	1171.2	1190.2	1210.7	1224.1	1225.4
130°	1237.6	1259.4	1274.1	1289.1	1287.9
132.5°	1305.4	1323.0	1337.8	1350.1	1348.8
135°	1362.3	1384.0	1396.0	1409.8	1407.0
137.5°	1421.7	1438.0	1451.7	1465.2	1461.2
140°	1480.0	1490.9	1505.7	1517.9	1511.2
142.5°	1528.9	1538.4	1555.9	1566.7	1559.9
145°	1580.3	1578.9	1601.8	1611.4	1604.6
147.5°	1624.9	1620.8	1643.9	1650.6	1645.3
150°	1668.3	1658.8	1680.5	1688.6	1681.8
152.5°	1704.8	1694.0	1714.3	1722.5	1713.0
155°	1740.0	1727.9	1744.1	1752.2	1741.5
157.5°	1768.4	1757.7	1769.9	1779.4	1768.4
160°	1792.9	1784.7	1792.9	1800.9	1791.5
162.5°	1814.4	1806.5	1813.1	1822.6	1810.4
165°	1833.4	1825.4	1829.4	1838.8	1829.4
167.5°	1848.4	1840.2	1844.4	1853.8	1841.6
170°	1860.6	1852.4	1855.1	1864.6	1852.4
172.5°	1868.7	1860.6	1863.3	1872.8	1860.6
175°	1875.4	1865.9	1868.7	1878.1	1864.6
177.5°	1878.1	1868.7	1870.1	1879.5	1867.3
180°	1871.3	1871.3	1871.3	1871.3	1871.3

TEST NUMBER: P911587

CATALOG NUMBER: DFN2DIP-PN4F0-110D050US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.01	13.98	13.83	14.82	15.86	8.98	9.95	9.80	10.79	11.82
	3H	14.70	15.57	15.54	16.42	17.48	10.18	11.05	11.01	11.89	12.96
	4H	15.32	16.14	16.17	16.99	18.07	10.63	11.46	11.48	12.31	13.38
	6H	15.75	16.51	16.61	17.37	18.46	10.96	11.72	11.82	12.58	13.67
	8H	15.88	16.60	16.75	17.48	18.57	11.06	11.78	11.93	12.66	13.74
	12H	15.95	16.64	16.83	17.51	18.62	11.11	11.79	11.98	12.66	13.78
4H	2H	13.05	13.87	13.90	14.72	15.80	9.59	10.41	10.44	11.27	12.34
	3H	14.89	15.57	15.76	16.46	17.55	10.95	11.64	11.82	12.52	13.61
	4H	15.59	16.21	16.47	17.10	18.21	11.51	12.13	12.39	13.01	14.13
	6H	16.12	16.65	17.01	17.56	18.68	11.94	12.47	12.83	13.38	14.50
	8H	16.30	16.80	17.19	17.70	18.83	12.07	12.57	12.96	13.47	14.60
	12H	16.40	16.85	17.32	17.77	18.91	12.14	12.59	13.06	13.51	14.65
8H	4H	15.57	16.07	16.47	16.97	18.10	11.80	12.30	12.70	13.20	14.34
	6H	16.14	16.56	17.07	17.50	18.63	12.33	12.74	13.25	13.68	14.82
	8H	16.36	16.73	17.30	17.67	18.82	12.52	12.88	13.45	13.82	14.97
	12H	16.51	16.83	17.45	17.76	18.96	12.64	12.97	13.58	13.90	15.10
12H	4H	15.53	15.98	16.44	16.90	18.04	11.81	12.26	12.73	13.18	14.32
	6H	16.12	16.49	17.05	17.42	18.57	12.38	12.74	13.31	13.68	14.83
	8H	16.35	16.67	17.28	17.60	18.80	12.59	12.92	13.53	13.84	15.05