

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914056

Luminaire Tested: DFN2DIP-PN4F0-040D040US927-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914056
REPORT IS A COMBINATION OF REPORTS P899609 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-040D040US927-FLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5941.4 lumens
Efficiency: N/A
Efficacy: 93.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 63.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914056

CATALOG NUMBER: DFN2DIP-PN4F0-040D040US927-FLLFLL

Luminous Intensity Polar Plot

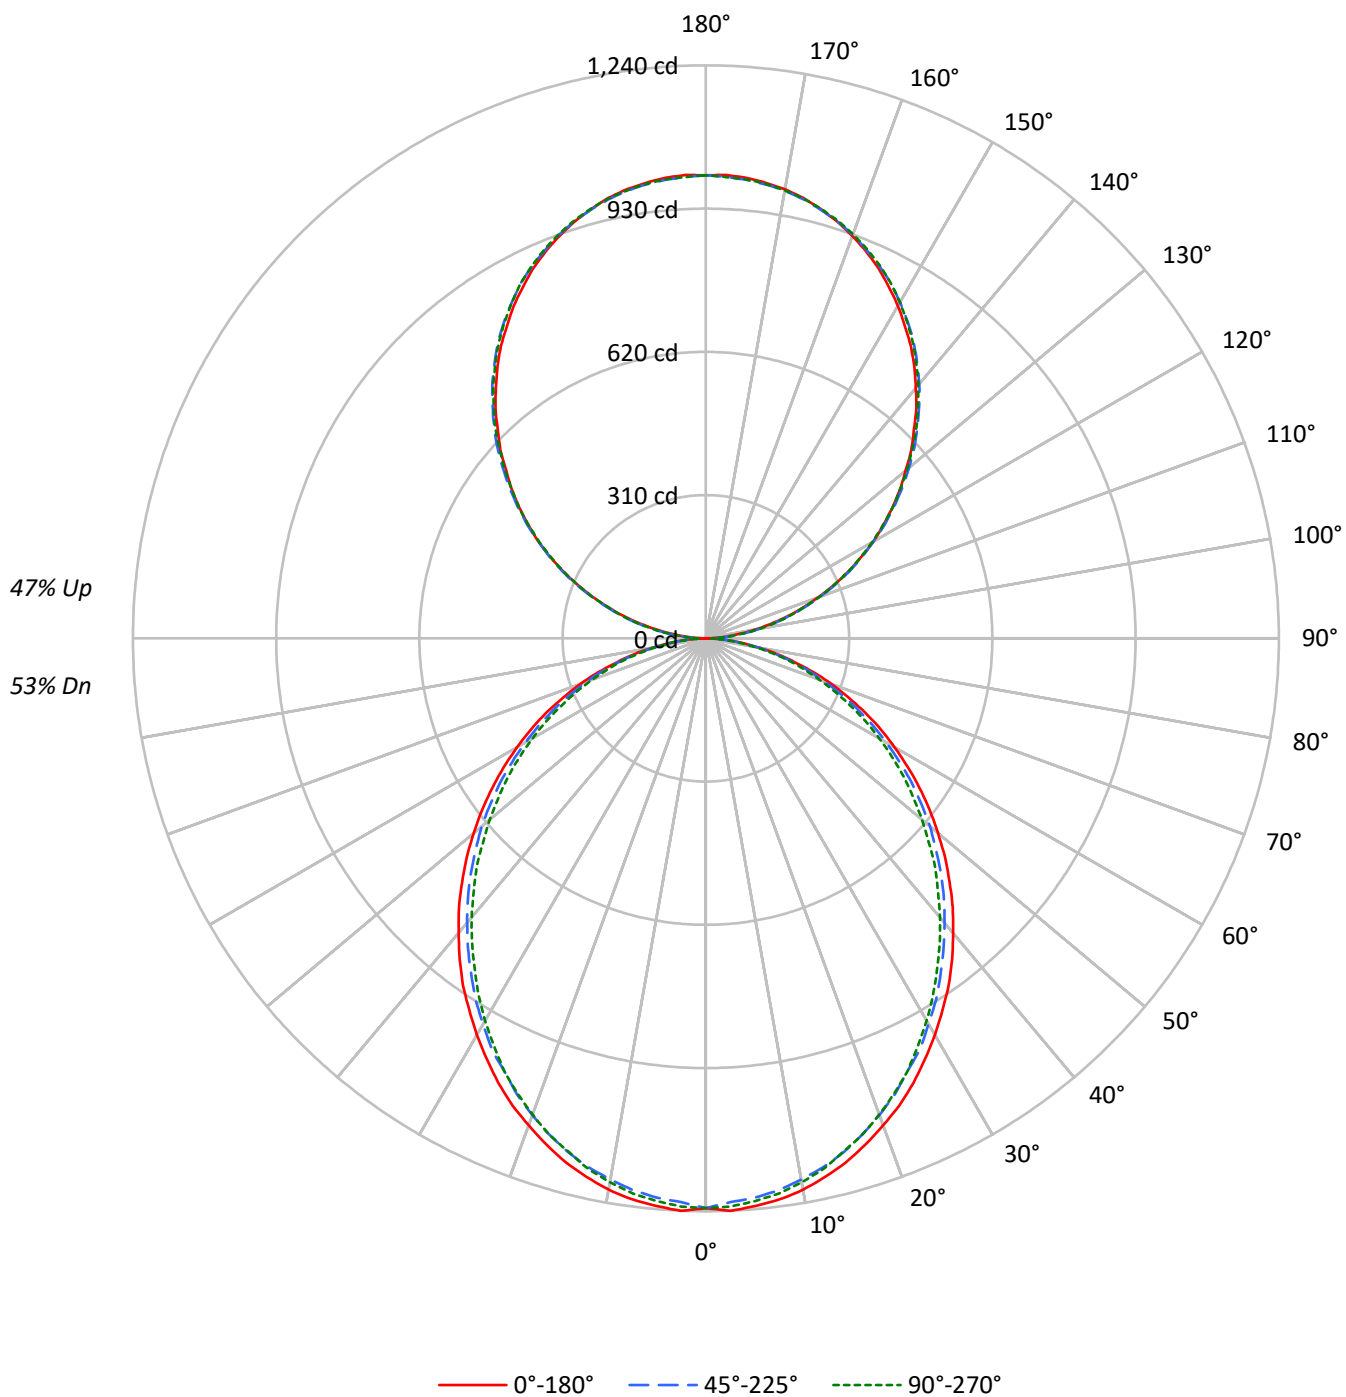

TEST NUMBER: P914056

CATALOG NUMBER: DFN2DIP-PN4F0-040D040US927-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	900	900	900
5°	901	888	894
10°	894	876	882
15°	881	861	863
20°	863	842	844
25°	846	818	822
30°	823	796	793
35°	802	769	763
40°	777	743	735
45°	751	716	706
50°	723	689	672
55°	693	657	641
60°	660	618	606
65°	623	579	564
70°	577	531	519
75°	513	473	478
80°	436	400	398
85°	315	273	266

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 785 cd/sqm

TEST NUMBER: P914056

CATALOG NUMBER: DFN2DIP-PN4F0-040D040US927-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.0	2.0
10°-20°	326.5	5.5
20°-30°	479.8	8.1
30°-40°	557.3	9.4
40°-50°	556.6	9.4
50°-60°	485.3	8.2
60°-70°	358.8	6.0
70°-80°	203.0	3.4
80°-90°	56.4	0.9
90°-100°	62.0	1.0
100°-110°	197.0	3.3
110°-120°	337.2	5.7
120°-130°	443.5	7.5
130°-140°	497.8	8.4
140°-150°	488.1	8.2
150°-160°	409.5	6.9
160°-170°	271.5	4.6
170°-180°	94.9	1.6
0°-30°	922.4	15.5
0°-40°	1479.7	24.9
0°-60°	2521.7	42.4
0°-90°	3139.9	52.8
90°-120°	596.2	10.0
90°-150°	2025.6	34.1
90°-180°	2801.0	47.1
0°-180°	5941.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1233	1233	1233	1233	1233	
5°	1233	1228	1215	1225	1222	117
15°	1174	1167	1151	1156	1150	331
25°	1062	1053	1033	1035	1033	489
35°	916	905	886	878	873	572
45°	746	738	720	707	702	576
55°	564	557	543	529	523	505
65°	381	373	362	351	345	376
75°	199	197	191	184	186	213
85°	49	48	46	43	42	54
90°	1	11	30	28	29	6
95°	44	53	54	54	53	49
105°	182	184	186	188	188	192
115°	338	343	342	341	338	335
125°	492	500	497	495	494	440
135°	637	646	648	647	644	492
145°	773	779	784	785	781	483
155°	884	886	889	893	890	407
165°	961	960	960	966	962	271
175°	1000	998	996	1002	997	95
180°	1002	1002	1002	1002	1002	

TEST NUMBER: P914056

CATALOG NUMBER: DFN2DIP-PN4F0-040D040US927-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1233.0	1233.0	1233.0	1233.0	1233.0
2.5°	1240.2	1234.2	1221.1	1233.0	1230.7
5°	1233.0	1228.3	1215.2	1224.6	1222.4
7.5°	1224.6	1217.6	1204.5	1214.1	1211.7
10°	1211.7	1203.4	1189.2	1198.6	1195.1
12.5°	1193.8	1186.8	1172.6	1178.5	1176.1
15°	1173.7	1166.6	1151.2	1156.0	1150.1
17.5°	1148.8	1141.8	1126.3	1132.2	1126.3
20°	1121.5	1114.4	1097.9	1101.4	1096.8
22.5°	1094.3	1083.6	1068.2	1068.2	1065.8
25°	1062.2	1052.8	1032.7	1035.0	1032.7
27.5°	1026.7	1018.3	1003.1	999.5	993.6
30°	991.2	981.7	963.9	960.4	955.6
32.5°	953.2	946.2	927.2	920.0	915.2
35°	916.5	904.7	885.7	878.5	872.6
37.5°	875.0	864.3	845.3	837.0	831.1
40°	832.3	822.8	803.7	793.2	788.5
42.5°	790.8	781.2	762.4	750.4	743.4
45°	745.8	737.5	719.6	706.7	701.9
47.5°	701.9	693.6	674.6	661.6	654.5
50°	655.6	649.7	633.1	616.5	610.5
52.5°	610.5	602.3	586.9	573.9	565.5
55°	564.4	557.2	543.0	528.8	522.9
57.5°	518.1	512.2	496.7	482.5	477.8
60°	471.8	467.1	450.6	437.5	434.0
62.5°	426.8	418.5	406.7	394.8	390.1
65°	380.6	373.4	361.6	350.9	345.1
67.5°	333.2	327.2	316.6	308.3	303.6
70°	289.3	284.6	273.9	265.5	260.9
72.5°	244.3	239.5	233.6	225.3	221.7
75°	199.2	196.9	190.8	183.8	186.2
77.5°	158.8	154.1	151.7	148.1	144.7
80°	118.6	117.3	114.9	111.5	109.1
82.5°	80.6	80.6	79.5	74.7	74.7
85°	48.6	47.5	46.3	42.6	41.5
87.5°	21.4	19.0	16.6	13.1	11.8
90°	0.9	10.9	29.6	27.8	28.7
92.5°	18.7	25.3	26.3	27.2	27.2
95°	44.1	52.6	54.1	54.1	52.6
97.5°	73.4	81.3	84.6	84.6	84.6
100°	107.3	114.2	116.6	116.6	115.7
102.5°	142.9	148.1	151.4	152.3	151.4
105°	181.9	184.3	186.1	187.6	187.6
107.5°	220.5	224.2	224.2	224.7	220.5
110°	258.0	262.8	262.8	262.8	260.5

TEST NUMBER: P914056

CATALOG NUMBER: DFN2DIP-PN4F0-040D040US927-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	298.5	303.6	302.7	300.3	298.5
115°	338.3	343.3	341.7	340.8	338.3
117.5°	377.9	384.6	380.4	377.9	375.6
120°	417.9	424.5	417.9	417.9	415.1
122.5°	454.1	462.6	458.4	455.9	454.1
125°	492.2	499.7	497.3	494.6	493.7
127.5°	529.3	538.7	535.4	531.7	529.3
130°	564.0	575.0	573.5	571.6	568.3
132.5°	603.0	611.5	612.1	607.8	605.5
135°	636.6	645.9	647.8	646.8	644.4
137.5°	674.1	681.6	683.1	682.5	678.9
140°	706.9	714.5	718.7	718.7	715.4
142.5°	740.8	748.4	750.8	751.7	748.4
145°	772.9	778.9	783.7	784.7	781.3
147.5°	801.5	809.1	812.7	814.2	810.9
150°	831.2	836.3	839.6	842.3	839.6
152.5°	857.5	862.5	866.8	870.1	866.8
155°	883.7	886.1	888.8	893.1	890.3
157.5°	906.4	908.2	909.7	915.8	911.5
160°	926.6	928.4	929.3	934.5	930.8
162.5°	945.3	945.3	946.3	952.0	947.8
165°	961.4	960.4	960.4	966.5	962.3
167.5°	975.9	973.1	973.1	979.2	974.9
170°	986.7	984.3	983.4	989.4	984.3
172.5°	994.3	991.9	990.9	997.0	991.9
175°	1000.4	997.9	996.1	1002.1	997.0
177.5°	1003.7	1001.2	999.4	1004.6	999.4
180°	1002.1	1002.1	1002.1	1002.1	1002.1

TEST NUMBER: P914056

CATALOG NUMBER: DFN2DIP-PN4F0-040D040US927-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.17	8.06	8.10	9.01	10.24	6.73	7.62	7.66	8.57	9.80
	3H	8.84	9.63	9.78	10.59	11.84	8.35	9.15	9.30	10.11	11.36
	4H	9.43	10.18	10.39	11.14	12.41	8.94	9.69	9.90	10.66	11.92
	6H	9.83	10.53	10.80	11.49	12.77	9.34	10.03	10.31	11.00	12.28
	8H	9.94	10.60	10.91	11.58	12.86	9.44	10.11	10.42	11.09	12.36
	12H	9.99	10.62	10.97	11.60	12.89	9.49	10.12	10.47	11.10	12.39
4H	2H	7.64	8.39	8.60	9.35	10.61	7.28	8.04	8.25	9.00	10.26
	3H	9.51	10.14	10.48	11.13	12.41	9.10	9.73	10.08	10.73	12.00
	4H	10.23	10.80	11.21	11.79	13.09	9.81	10.38	10.79	11.37	12.67
	6H	10.74	11.24	11.74	12.25	13.55	10.32	10.82	11.31	11.83	13.12
	8H	10.90	11.36	11.89	12.36	13.68	10.47	10.93	11.46	11.93	13.25
	12H	10.97	11.39	11.99	12.41	13.73	10.53	10.95	11.55	11.97	13.29
8H	4H	10.42	10.89	11.42	11.89	13.20	10.05	10.52	11.05	11.52	12.83
	6H	11.06	11.44	12.08	12.49	13.80	10.68	11.07	11.70	12.11	13.42
	8H	11.28	11.62	12.31	12.65	13.98	10.90	11.24	11.93	12.27	13.60
	12H	11.42	11.71	12.45	12.74	14.11	11.02	11.31	12.05	12.34	13.71
12H	4H	10.41	10.83	11.43	11.85	13.17	10.05	10.47	11.06	11.49	12.80
	6H	11.09	11.43	12.12	12.46	13.79	10.73	11.06	11.75	12.10	13.42
	8H	11.34	11.63	12.37	12.66	14.03	10.96	11.26	12.00	12.29	13.66