

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914060

Luminaire Tested: DFN2DIP-PN4F0-040D050US927-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P914060  
REPORT IS A COMBINATION OF REPORTS P899627 AND P896497  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-PN4F0-040D050US927-FLLFLL  
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6642.5 lumens  
Efficiency: N/A  
Efficacy: 93.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 71  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9968  
Total Harmonic Distortion (THDi): 0.064  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P914060  
CATALOG NUMBER: DFN2DIP-PN4F0-040D050US927-FLLFLL

### Luminous Intensity Polar Plot

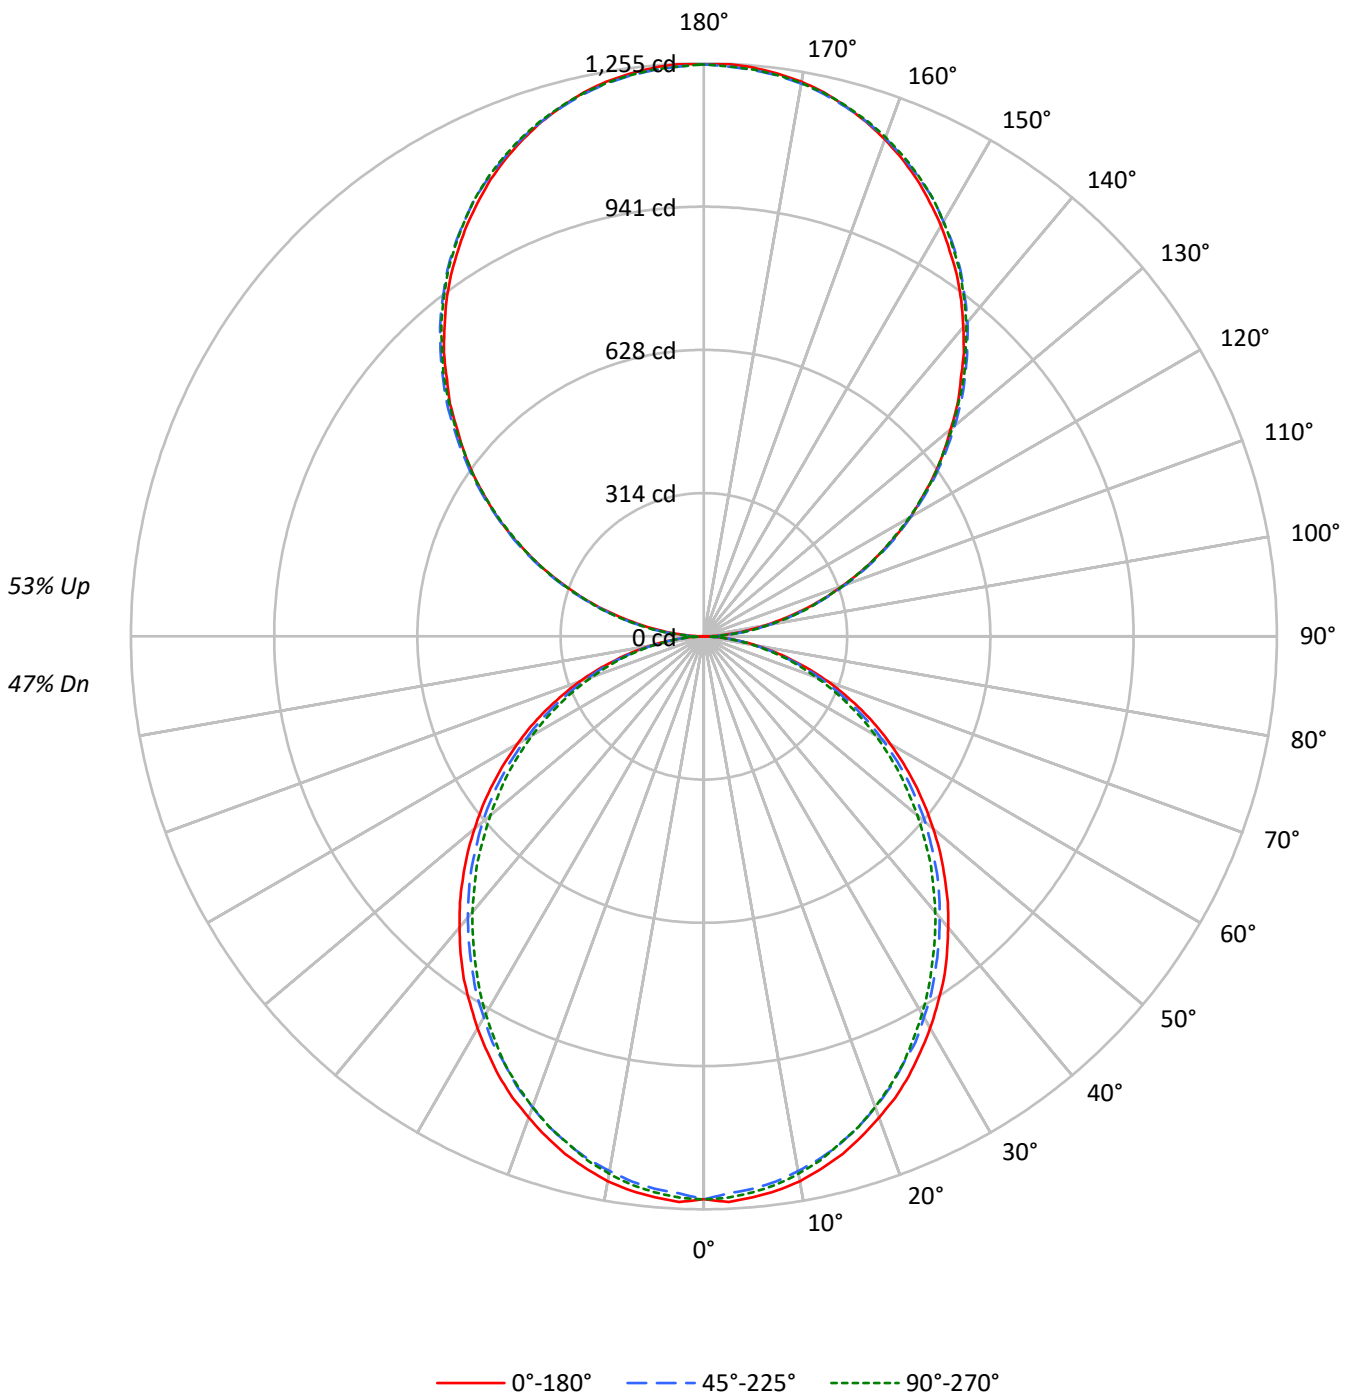



TEST NUMBER: P914060  
 CATALOG NUMBER: DFN2DIP-PN4F0-040D050US927-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	54	54	54	47	47	47	47
1	97	93	89	85	89	85	82	79	72	69	67	59	57	56	47	46	45	40	40	40	40
2	88	81	75	70	81	75	69	65	63	59	56	52	49	47	42	40	38	33	33	33	33
3	81	71	64	58	74	66	59	54	55	51	47	46	42	39	37	35	32	28	28	28	28
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28	24	24	24	24
5	68	56	48	42	62	52	45	39	44	39	34	37	33	29	30	27	24	21	21	21	21
6	62	50	42	37	57	47	40	34	40	34	30	33	29	26	27	24	21	19	19	19	19
7	58	45	38	32	53	42	35	30	36	30	26	30	26	23	25	21	19	16	16	16	16
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	19	17	15	15	15	15
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15	13	13	13	13
10	47	35	27	23	43	32	26	21	28	22	19	23	19	16	19	16	14	12	12	12	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	900	900	900
5°	901	888	894
10°	894	876	882
15°	881	861	863
20°	863	842	844
25°	846	818	822
30°	823	796	793
35°	802	769	763
40°	777	743	735
45°	751	716	706
50°	723	689	672
55°	693	657	641
60°	660	618	606
65°	623	579	564
70°	577	531	519
75°	513	473	478
80°	436	400	398
85°	315	273	266

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 981 cd/sqm



TEST NUMBER: P914060

CATALOG NUMBER: DFN2DIP-PN4F0-040D050US927-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	116.0	1.7
10°-20°	326.5	4.9
20°-30°	479.8	7.2
30°-40°	557.3	8.4
40°-50°	556.6	8.4
50°-60°	485.3	7.3
60°-70°	358.8	5.4
70°-80°	203.0	3.1
80°-90°	57.1	0.9
90°-100°	77.5	1.2
100°-110°	246.3	3.7
110°-120°	421.5	6.3
120°-130°	554.3	8.3
130°-140°	622.2	9.4
140°-150°	610.1	9.2
150°-160°	511.8	7.7
160°-170°	339.4	5.1
170°-180°	118.6	1.8
0°-30°	922.4	13.9
0°-40°	1479.7	22.3
0°-60°	2521.7	38.0
0°-90°	3140.6	47.3
90°-120°	745.3	11.2
90°-150°	2532.0	38.1
90°-180°	3502.0	52.7
0°-180°	6642.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1233	1233	1233	1233	1233	
5°	1233	1228	1215	1225	1222	117
15°	1174	1167	1151	1156	1150	331
25°	1062	1053	1033	1035	1033	489
35°	916	905	886	878	873	572
45°	746	738	720	707	702	576
55°	564	557	543	529	523	505
65°	381	373	362	351	345	376
75°	199	197	191	184	186	213
85°	49	48	46	43	42	54
90°	1	14	37	35	36	6
95°	55	66	68	68	66	61
105°	227	230	233	234	234	240
115°	423	429	427	426	423	418
125°	615	625	622	618	617	550
135°	796	807	810	809	806	615
145°	966	974	980	981	977	604
155°	1105	1108	1111	1116	1113	508
165°	1202	1201	1201	1208	1203	339
175°	1250	1247	1245	1253	1246	119
180°	1253	1253	1253	1253	1253	



TEST NUMBER: P914060

CATALOG NUMBER: DFN2DIP-PN4F0-040D050US927-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1233.0	1233.0	1233.0	1233.0	1233.0
2.5°	1240.2	1234.2	1221.1	1233.0	1230.7
5°	1233.0	1228.3	1215.2	1224.6	1222.4
7.5°	1224.6	1217.6	1204.5	1214.1	1211.7
10°	1211.7	1203.4	1189.2	1198.6	1195.1
12.5°	1193.8	1186.8	1172.6	1178.5	1176.1
15°	1173.7	1166.6	1151.2	1156.0	1150.1
17.5°	1148.8	1141.8	1126.3	1132.2	1126.3
20°	1121.5	1114.4	1097.9	1101.4	1096.8
22.5°	1094.3	1083.6	1068.2	1068.2	1065.8
25°	1062.2	1052.8	1032.7	1035.0	1032.7
27.5°	1026.7	1018.3	1003.1	999.5	993.6
30°	991.2	981.7	963.9	960.4	955.6
32.5°	953.2	946.2	927.2	920.0	915.2
35°	916.5	904.7	885.7	878.5	872.6
37.5°	875.0	864.3	845.3	837.0	831.1
40°	832.3	822.8	803.7	793.2	788.5
42.5°	790.8	781.2	762.4	750.4	743.4
45°	745.8	737.5	719.6	706.7	701.9
47.5°	701.9	693.6	674.6	661.6	654.5
50°	655.6	649.7	633.1	616.5	610.5
52.5°	610.5	602.3	586.9	573.9	565.5
55°	564.4	557.2	543.0	528.8	522.9
57.5°	518.1	512.2	496.7	482.5	477.8
60°	471.8	467.1	450.6	437.5	434.0
62.5°	426.8	418.5	406.7	394.8	390.1
65°	380.6	373.4	361.6	350.9	345.1
67.5°	333.2	327.2	316.6	308.3	303.6
70°	289.3	284.6	273.9	265.5	260.9
72.5°	244.3	239.5	233.6	225.3	221.7
75°	199.2	196.9	190.8	183.8	186.2
77.5°	158.8	154.1	151.7	148.1	144.7
80°	118.6	117.3	114.9	111.5	109.1
82.5°	80.6	80.6	79.5	74.7	74.7
85°	48.6	47.5	46.3	42.6	41.5
87.5°	21.4	19.0	16.6	13.1	11.8
90°	1.1	13.6	37.0	34.8	35.9
92.5°	23.4	31.7	32.9	34.0	34.0
95°	55.1	65.8	67.6	67.6	65.8
97.5°	91.7	101.6	105.8	105.8	105.8
100°	134.0	142.8	145.8	145.8	144.7
102.5°	178.6	185.1	189.2	190.4	189.2
105°	227.4	230.4	232.7	234.5	234.5
107.5°	275.7	280.2	280.2	281.0	275.7
110°	322.5	328.6	328.6	328.6	325.5



TEST NUMBER: P914060

CATALOG NUMBER: DFN2DIP-PN4F0-040D050US927-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	373.1	379.5	378.4	375.4	373.1
115°	422.9	429.0	427.1	426.0	422.9
117.5°	472.5	480.8	475.5	472.5	469.4
120°	522.3	530.6	522.3	522.3	518.9
122.5°	567.6	578.2	572.9	569.9	567.6
125°	615.2	624.6	621.6	618.2	617.1
127.5°	661.6	673.4	669.2	664.6	661.6
130°	705.1	718.7	716.8	714.5	710.3
132.5°	753.8	764.4	765.2	759.9	756.8
135°	795.7	807.4	809.7	808.6	805.6
137.5°	842.6	852.0	853.9	853.1	848.6
140°	883.7	893.2	898.4	898.4	894.3
142.5°	926.0	935.5	938.5	939.6	935.5
145°	966.1	973.6	979.6	980.8	976.6
147.5°	1002.0	1011.4	1015.9	1017.8	1013.6
150°	1038.9	1045.4	1049.5	1052.9	1049.5
152.5°	1071.8	1078.2	1083.5	1087.7	1083.5
155°	1104.6	1107.6	1111.0	1116.3	1112.9
157.5°	1133.0	1135.2	1137.1	1144.7	1139.4
160°	1158.2	1160.5	1161.7	1168.1	1163.6
162.5°	1181.7	1181.7	1182.8	1190.0	1184.7
165°	1201.7	1200.6	1200.6	1208.2	1202.8
167.5°	1219.8	1216.4	1216.4	1224.0	1218.7
170°	1233.4	1230.4	1229.3	1236.8	1230.4
172.5°	1242.9	1239.8	1238.7	1246.3	1239.8
175°	1250.5	1247.4	1245.2	1252.7	1246.3
177.5°	1254.6	1251.6	1249.3	1255.7	1249.3
180°	1252.7	1252.7	1252.7	1252.7	1252.7



TEST NUMBER: P914060  
 CATALOG NUMBER: DFN2DIP-PN4F0-040D050US927-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.65	7.49	7.63	8.48	9.79	6.21	7.05	7.19	8.04	9.35
	3H	8.32	9.07	9.31	10.07	11.40	7.83	8.58	8.82	9.58	10.92
	4H	8.90	9.62	9.91	10.62	11.96	8.42	9.13	9.42	10.13	11.47
	6H	9.30	9.96	10.32	10.97	12.32	8.81	9.47	9.83	10.48	11.83
	8H	9.41	10.03	10.43	11.06	12.41	8.92	9.54	9.94	10.57	11.92
	12H	9.46	10.05	10.48	11.07	12.45	8.96	9.55	9.98	10.57	11.95
4H	2H	7.11	7.82	8.12	8.83	10.17	6.76	7.47	7.77	8.48	9.82
	3H	8.98	9.57	10.00	10.61	11.96	8.58	9.17	9.60	10.21	11.56
	4H	9.70	10.24	10.72	11.27	12.64	9.28	9.82	10.30	10.85	12.22
	6H	10.21	10.68	11.25	11.73	13.10	9.79	10.26	10.82	11.31	12.68
	8H	10.36	10.80	11.40	11.84	13.23	9.93	10.37	10.97	11.41	12.80
	12H	10.44	10.83	11.49	11.89	13.28	10.00	10.39	11.05	11.45	12.84
8H	4H	9.89	10.33	10.93	11.37	12.76	9.52	9.96	10.56	11.00	12.39
	6H	10.52	10.88	11.59	11.97	13.35	10.15	10.51	11.21	11.59	12.98
	8H	10.75	11.06	11.82	12.13	13.54	10.36	10.68	11.43	11.75	13.15
	12H	10.88	11.16	11.95	12.22	13.67	10.48	10.76	11.55	11.82	13.27
12H	4H	9.88	10.27	10.93	11.33	12.72	9.51	9.91	10.57	10.96	12.36
	6H	10.55	10.87	11.62	11.94	13.34	10.19	10.51	11.26	11.58	12.98
	8H	10.80	11.08	11.87	12.14	13.58	10.42	10.70	11.50	11.77	13.21