

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914107

Luminaire Tested: DFN2DIP-PN4F0-050D070US927-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914107
REPORT IS A COMBINATION OF REPORTS P901186 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-050D070US927-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8856.6 lumens
Efficiency: N/A
Efficacy: 91.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 96.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914107

CATALOG NUMBER: DFN2DIP-PN4F0-050D070US927-RLLONL

Luminous Intensity Polar Plot

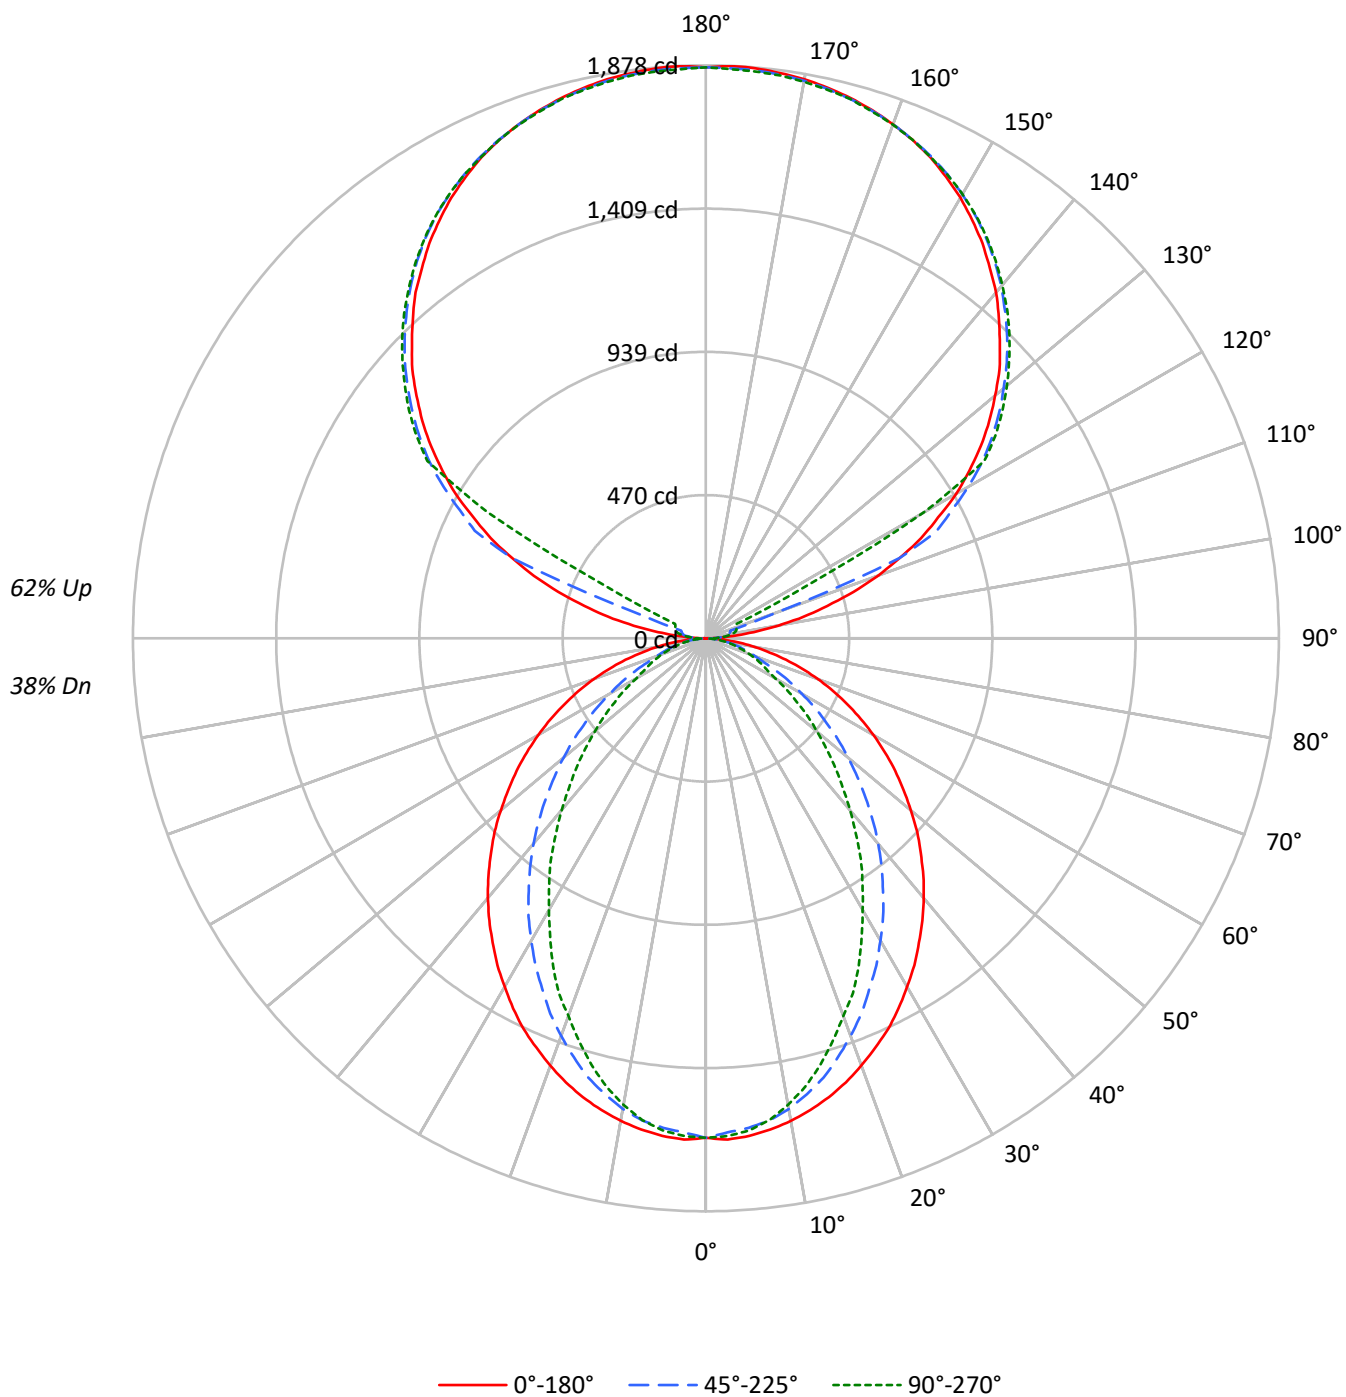

TEST NUMBER: P914107

CATALOG NUMBER: DFN2DIP-PN4F0-050D070US927-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45
1	95	91	88	84	87	83	80	77	68	66	64	54	52	51	40	40	39
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	35	33
3	80	71	64	58	72	65	59	54	53	49	45	42	39	37	32	30	29
4	73	63	55	50	66	57	51	46	47	42	39	38	34	32	29	27	25
5	67	56	48	43	61	51	45	40	42	37	34	34	31	28	26	24	22
6	62	50	43	37	56	46	39	34	38	33	29	31	27	24	24	22	20
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	18
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16
9	50	38	31	26	45	35	28	24	29	24	21	24	20	18	19	16	14
10	46	35	28	23	42	32	26	22	27	22	19	22	18	16	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1195	1195	1195
5°	1197	1176	1184
10°	1185	1153	1145
15°	1169	1115	1086
20°	1147	1063	1013
25°	1125	1004	943
30°	1095	944	853
35°	1066	879	775
40°	1037	812	685
45°	1002	738	603
50°	967	662	523
55°	930	582	447
60°	887	498	368
65°	837	413	332
70°	777	333	300
75°	702	294	274
80°	593	247	238
85°	413	166	180

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1002 cd/sqm

TEST NUMBER: P914107

CATALOG NUMBER: DFN2DIP-PN4F0-050D070US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.4	1.7
10°-20°	421.2	4.8
20°-30°	591.3	6.7
30°-40°	644.6	7.3
40°-50°	592.4	6.7
50°-60°	465.3	5.3
60°-70°	302.9	3.4
70°-80°	155.9	1.8
80°-90°	43.1	0.5
90°-100°	61.7	0.7
100°-110°	230.0	2.6
110°-120°	610.1	6.9
120°-130°	1011.9	11.4
130°-140°	1074.9	12.1
140°-150°	999.0	11.3
150°-160°	803.2	9.1
160°-170°	517.5	5.8
170°-180°	178.1	2.0
0°-30°	1165.9	13.2
0°-40°	1810.5	20.4
0°-60°	2868.2	32.4
0°-90°	3370.1	38.1
90°-120°	901.9	10.2
90°-150°	3987.7	45.0
90°-180°	5487.0	62.0
0°-180°	8856.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1637	1637	1637	1637	1637	
5°	1637	1630	1610	1624	1619	155
15°	1557	1541	1490	1462	1448	439
25°	1413	1366	1268	1207	1185	650
35°	1218	1142	1012	918	886	762
45°	996	896	741	636	600	769
55°	757	641	481	393	364	676
65°	511	391	258	208	203	507
75°	273	169	118	108	107	288
85°	64	33	28	28	28	73
90°	1	16	27	34	36	8
95°	88	43	53	60	58	104
105°	412	452	83	97	103	440
115°	779	802	836	209	111	767
125°	1101	1119	1144	1154	1158	982
135°	1362	1384	1396	1410	1407	1052
145°	1580	1579	1602	1612	1605	988
155°	1740	1728	1744	1752	1742	802
165°	1834	1826	1830	1839	1830	518
175°	1876	1866	1869	1878	1865	178
180°	1871	1871	1871	1871	1871	

TEST NUMBER: P914107

CATALOG NUMBER: DFN2DIP-PN4F0-050D070US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1637.0	1637.0	1637.0	1637.0	1637.0
2.5°	1644.4	1637.0	1620.7	1635.6	1632.6
5°	1637.0	1629.7	1610.3	1623.7	1619.3
7.5°	1623.7	1614.9	1594.1	1600.0	1592.5
10°	1605.9	1595.5	1566.0	1561.5	1552.6
12.5°	1583.7	1570.4	1530.3	1521.5	1505.1
15°	1557.0	1540.7	1490.4	1462.3	1447.5
17.5°	1525.9	1502.2	1439.9	1407.4	1383.6
20°	1490.4	1460.7	1386.6	1349.7	1317.0
22.5°	1451.9	1417.8	1331.8	1281.5	1259.3
25°	1413.3	1365.9	1268.1	1207.4	1185.1
27.5°	1367.5	1317.0	1208.9	1139.2	1105.2
30°	1318.6	1262.2	1143.7	1068.2	1028.1
32.5°	1271.1	1202.9	1081.6	992.6	955.5
35°	1217.8	1142.2	1011.9	918.5	885.9
37.5°	1165.9	1084.4	946.7	844.4	807.5
40°	1111.1	1022.3	878.4	773.3	734.8
42.5°	1054.9	960.0	810.4	700.7	663.8
45°	995.6	896.3	740.8	635.5	599.9
47.5°	939.3	834.2	674.1	568.9	536.3
50°	877.1	771.9	608.9	506.6	475.6
52.5°	816.3	705.1	546.7	448.9	420.8
55°	757.0	641.4	481.4	392.6	364.5
57.5°	696.3	577.8	423.7	340.8	317.0
60°	634.1	515.6	362.9	287.5	263.7
62.5°	573.4	454.9	311.1	240.0	228.2
65°	511.1	391.1	257.8	207.5	203.0
67.5°	451.9	331.8	207.5	182.2	177.8
70°	389.7	274.1	171.8	157.0	151.1
72.5°	330.4	220.7	143.7	131.9	128.9
75°	272.6	168.8	118.5	108.1	106.7
77.5°	214.8	119.9	93.4	87.4	84.4
80°	161.4	86.0	71.1	65.2	65.2
82.5°	112.6	57.8	48.9	45.9	45.9
85°	63.7	32.6	28.1	28.1	28.1
87.5°	23.8	11.8	11.8	10.4	10.4
90°	1.3	16.2	27.0	33.9	36.5
92.5°	33.9	28.4	32.5	35.3	36.5
95°	87.9	43.3	52.8	59.7	58.2
97.5°	158.4	47.5	69.0	73.2	74.5
100°	239.8	54.2	77.2	87.9	90.7
102.5°	329.0	326.5	79.9	94.7	98.9
105°	411.7	452.3	82.6	97.4	102.9
107.5°	507.8	541.6	85.4	100.2	105.7
110°	600.0	628.3	237.0	101.6	106.9

TEST NUMBER: P914107

CATALOG NUMBER: DFN2DIP-PN4F0-050D070US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	686.7	710.9	687.9	104.2	108.4
115°	778.6	801.6	835.5	208.6	111.1
117.5°	858.6	885.6	908.7	714.9	360.2
120°	947.9	968.2	992.7	1008.9	826.1
122.5°	1023.7	1045.4	1072.6	1080.6	1082.0
125°	1100.9	1118.6	1144.3	1153.8	1157.8
127.5°	1171.3	1190.3	1210.7	1224.2	1225.5
130°	1237.7	1259.4	1274.2	1289.2	1287.9
132.5°	1305.4	1323.1	1337.9	1350.1	1348.8
135°	1362.3	1384.0	1396.1	1409.8	1407.1
137.5°	1421.8	1438.1	1451.8	1465.3	1461.3
140°	1480.0	1491.0	1505.8	1518.0	1511.2
142.5°	1528.9	1538.4	1555.9	1566.7	1560.0
145°	1580.4	1579.0	1601.9	1611.5	1604.7
147.5°	1624.9	1621.0	1643.9	1650.7	1645.4
150°	1668.3	1658.9	1680.6	1688.6	1681.9
152.5°	1704.9	1694.1	1714.4	1722.5	1713.1
155°	1740.1	1728.0	1744.2	1752.3	1741.5
157.5°	1768.5	1757.8	1770.0	1779.5	1768.5
160°	1793.0	1784.8	1793.0	1801.0	1791.5
162.5°	1814.6	1806.5	1813.2	1822.7	1810.5
165°	1833.5	1825.5	1829.5	1839.0	1829.5
167.5°	1848.5	1840.2	1844.4	1853.9	1841.7
170°	1860.7	1852.5	1855.2	1864.7	1852.5
172.5°	1868.8	1860.7	1863.4	1872.9	1860.7
175°	1875.5	1866.0	1868.8	1878.2	1864.7
177.5°	1878.2	1868.8	1870.2	1879.7	1867.4
180°	1871.4	1871.4	1871.4	1871.4	1871.4

TEST NUMBER: P914107

CATALOG NUMBER: DFN2DIP-PN4F0-050D070US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.54	7.29	7.60	8.34	9.78	2.51	3.25	3.57	4.31	5.74
	3H	8.22	8.88	9.29	9.95	11.40	3.69	4.36	4.76	5.42	6.88
	4H	8.82	9.45	9.90	10.52	11.98	4.14	4.77	5.22	5.84	7.30
	6H	9.24	9.82	10.33	10.89	12.37	4.46	5.03	5.55	6.11	7.58
	8H	9.37	9.92	10.46	11.01	12.47	4.54	5.09	5.64	6.18	7.65
	12H	9.43	9.95	10.53	11.03	12.52	4.59	5.11	5.68	6.19	7.68
4H	2H	6.55	7.18	7.64	8.25	9.71	3.10	3.72	4.18	4.79	6.25
	3H	8.38	8.90	9.47	9.99	11.47	4.44	4.96	5.53	6.06	7.53
	4H	9.07	9.55	10.17	10.63	12.13	4.98	5.46	6.08	6.55	8.04
	6H	9.58	9.99	10.69	11.10	12.59	5.40	5.81	6.51	6.92	8.41
	8H	9.76	10.14	10.86	11.24	12.74	5.53	5.91	6.63	7.01	8.51
	12H	9.85	10.19	10.97	11.31	12.82	5.59	5.93	6.71	7.05	8.56
8H	4H	9.03	9.41	10.13	10.51	12.02	5.26	5.64	6.37	6.74	8.25
	6H	9.59	9.91	10.72	11.05	12.55	5.78	6.09	6.90	7.24	8.73
	8H	9.81	10.09	10.95	11.21	12.73	5.97	6.24	7.10	7.37	8.89
	12H	9.95	10.19	11.09	11.31	12.87	6.08	6.33	7.22	7.45	9.00
12H	4H	8.98	9.32	10.10	10.44	11.94	5.26	5.61	6.38	6.72	8.23
	6H	9.57	9.85	10.70	10.97	12.49	5.83	6.10	6.96	7.23	8.75
	8H	9.79	10.03	10.93	11.15	12.71	6.03	6.28	7.17	7.40	8.95

END OF REPORT