

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914126

Luminaire Tested: DFN2DIP-PN4F0-050D120US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914126
REPORT IS A COMBINATION OF REPORTS P899756 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-050D120US927-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11779.7 lumens
Efficiency: N/A
Efficacy: 79.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 147.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914126

CATALOG NUMBER: DFN2DIP-PN4F0-050D120US927-RLLFLL

Luminous Intensity Polar Plot

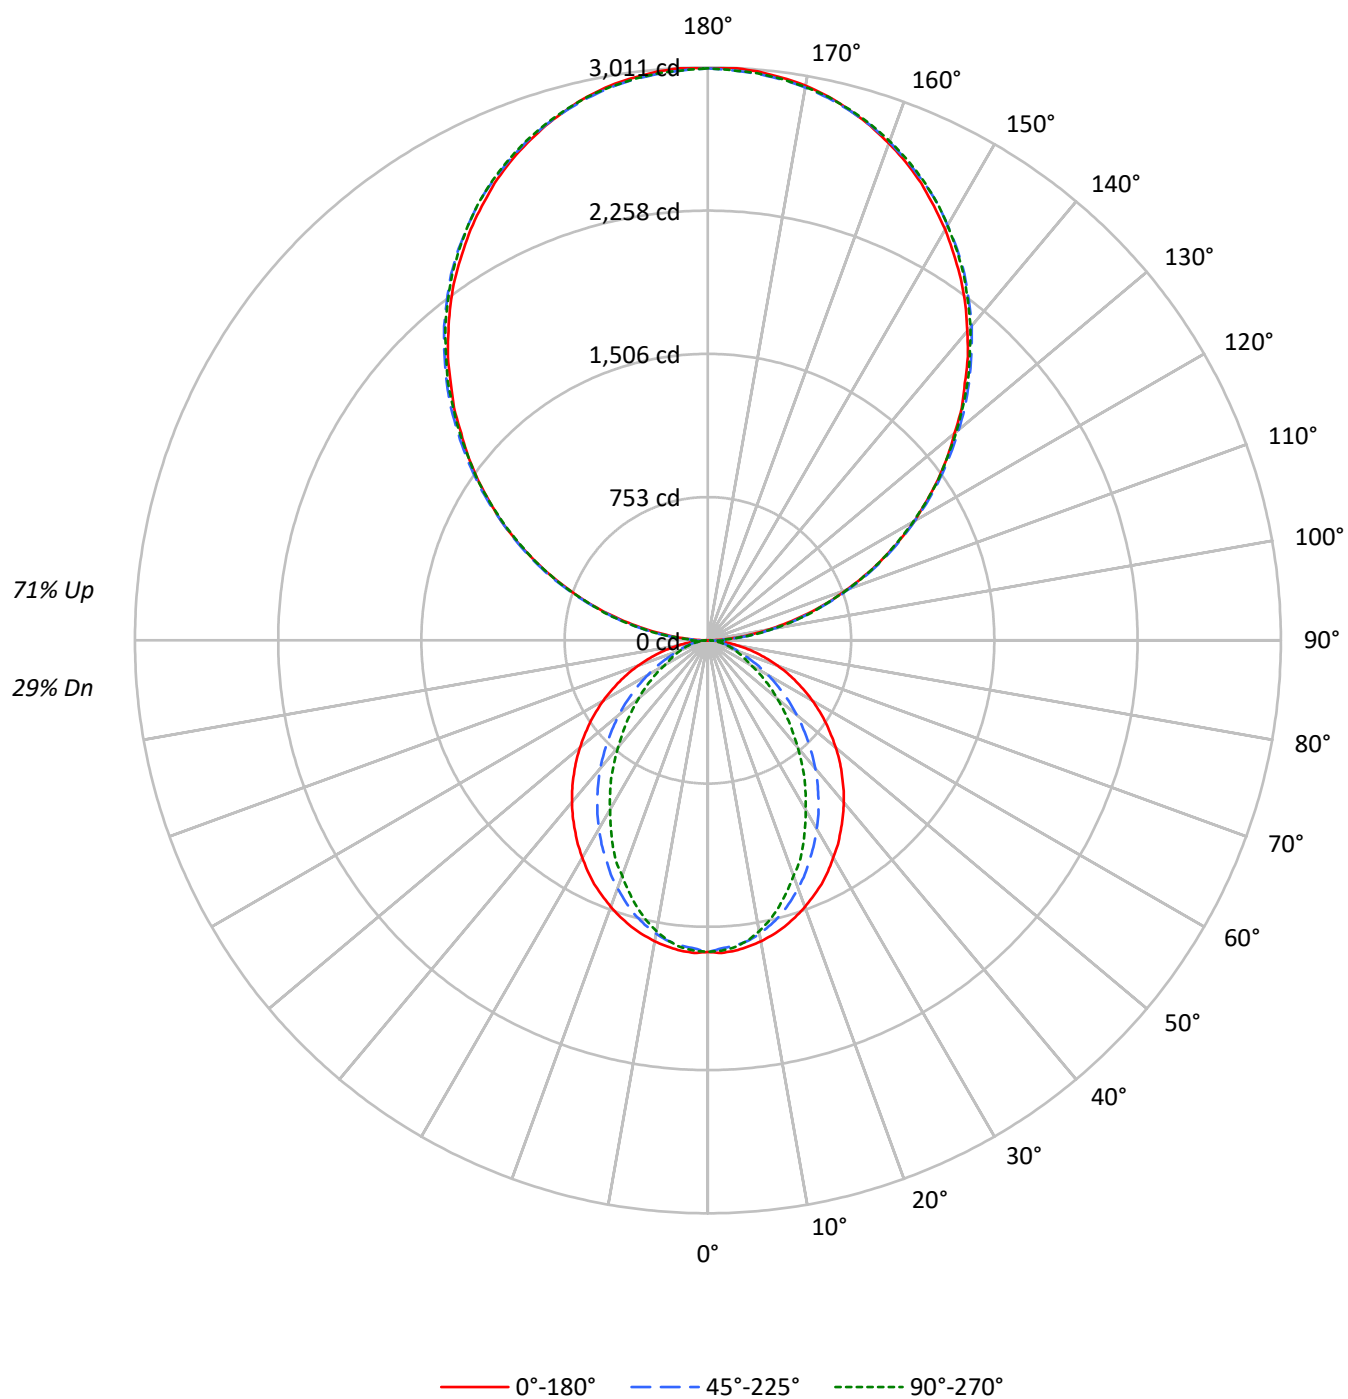

TEST NUMBER: P914126

CATALOG NUMBER: DFN2DIP-PN4F0-050D120US927-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	37	37	37
1	93	89	86	82	83	80	77	74	63	61	59	47	46	45	33	32	31
2	85	78	72	68	76	70	65	61	55	52	49	42	40	38	29	28	27
3	78	69	62	56	69	62	56	51	49	45	42	37	34	32	26	24	23
4	71	61	54	48	64	55	49	44	44	39	36	33	30	28	23	22	20
5	65	54	47	41	58	49	42	38	39	34	31	30	27	24	21	19	18
6	60	49	41	36	54	44	37	33	35	30	27	27	24	21	19	17	16
7	56	44	36	31	50	40	33	29	32	27	24	25	21	19	18	16	14
8	52	40	32	27	46	36	30	25	29	24	21	22	19	17	16	14	13
9	48	36	29	24	43	33	27	22	27	22	19	21	17	15	15	13	11
10	45	33	26	22	40	30	24	20	24	20	17	19	16	14	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1195	1195	1195
5°	1197	1176	1184
10°	1185	1153	1145
15°	1169	1115	1086
20°	1147	1063	1013
25°	1125	1004	943
30°	1095	944	853
35°	1066	879	775
40°	1037	812	685
45°	1002	738	603
50°	967	662	523
55°	930	582	447
60°	887	498	368
65°	837	413	332
70°	777	333	300
75°	702	294	274
80°	593	247	238
85°	413	166	180

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2354 cd/sqm

TEST NUMBER: P914126

CATALOG NUMBER: DFN2DIP-PN4F0-050D120US927-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.4	1.3
10°-20°	421.2	3.6
20°-30°	591.3	5.0
30°-40°	644.6	5.5
40°-50°	592.4	5.0
50°-60°	465.3	3.9
60°-70°	302.9	2.6
70°-80°	155.9	1.3
80°-90°	48.3	0.4
90°-100°	186.0	1.6
100°-110°	591.1	5.0
110°-120°	1011.6	8.6
120°-130°	1330.4	11.3
130°-140°	1493.3	12.7
140°-150°	1464.3	12.4
150°-160°	1228.4	10.4
160°-170°	814.6	6.9
170°-180°	284.7	2.4
0°-30°	1165.9	9.9
0°-40°	1810.5	15.4
0°-60°	2868.2	24.3
0°-90°	3375.3	28.7
90°-120°	1788.7	15.2
90°-150°	6076.6	51.6
90°-180°	8404.0	71.3
0°-180°	11779.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1637	1637	1637	1637	1637	
5°	1637	1630	1610	1624	1619	155
15°	1557	1541	1490	1462	1448	439
25°	1413	1366	1268	1207	1185	650
35°	1218	1142	1012	918	886	762
45°	996	896	741	636	600	769
55°	757	641	481	393	364	676
65°	511	391	258	208	203	507
75°	273	169	118	108	107	288
85°	64	33	28	28	28	73
90°	3	33	89	83	86	12
95°	132	158	162	162	158	147
105°	546	553	558	563	563	576
115°	1015	1030	1025	1022	1015	1004
125°	1476	1499	1492	1484	1481	1319
135°	1910	1938	1943	1940	1933	1476
145°	2318	2337	2351	2354	2344	1449
155°	2651	2658	2667	2679	2671	1220
165°	2884	2881	2881	2900	2887	814
175°	3001	2994	2988	3006	2991	285
180°	3006	3006	3006	3006	3006	

TEST NUMBER: P914126

CATALOG NUMBER: DFN2DIP-PN4F0-050D120US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1637.0	1637.0	1637.0	1637.0	1637.0
2.5°	1644.4	1637.0	1620.7	1635.6	1632.6
5°	1637.0	1629.7	1610.3	1623.7	1619.3
7.5°	1623.7	1614.9	1594.1	1600.0	1592.5
10°	1605.9	1595.5	1566.0	1561.5	1552.6
12.5°	1583.7	1570.4	1530.3	1521.5	1505.1
15°	1557.0	1540.7	1490.4	1462.3	1447.5
17.5°	1525.9	1502.2	1439.9	1407.4	1383.6
20°	1490.4	1460.7	1386.6	1349.7	1317.0
22.5°	1451.9	1417.8	1331.8	1281.5	1259.3
25°	1413.3	1365.9	1268.1	1207.4	1185.1
27.5°	1367.5	1317.0	1208.9	1139.2	1105.2
30°	1318.6	1262.2	1143.7	1068.2	1028.1
32.5°	1271.1	1202.9	1081.6	992.6	955.5
35°	1217.8	1142.2	1011.9	918.5	885.9
37.5°	1165.9	1084.4	946.7	844.4	807.5
40°	1111.1	1022.3	878.4	773.3	734.8
42.5°	1054.9	960.0	810.4	700.7	663.8
45°	995.6	896.3	740.8	635.5	599.9
47.5°	939.3	834.2	674.1	568.9	536.3
50°	877.1	771.9	608.9	506.6	475.6
52.5°	816.3	705.1	546.7	448.9	420.8
55°	757.0	641.4	481.4	392.6	364.5
57.5°	696.3	577.8	423.7	340.8	317.0
60°	634.1	515.6	362.9	287.5	263.7
62.5°	573.4	454.9	311.1	240.0	228.2
65°	511.1	391.1	257.8	207.5	203.0
67.5°	451.9	331.8	207.5	182.2	177.8
70°	389.7	274.1	171.8	157.0	151.1
72.5°	330.4	220.7	143.7	131.9	128.9
75°	272.6	168.8	118.5	108.1	106.7
77.5°	214.8	119.9	93.4	87.4	84.4
80°	161.4	86.0	71.1	65.2	65.2
82.5°	112.6	57.8	48.9	45.9	45.9
85°	63.7	32.6	28.1	28.1	28.1
87.5°	23.8	11.8	11.8	10.4	10.4
90°	2.7	32.6	88.8	83.4	86.1
92.5°	56.2	76.1	78.8	81.6	81.6
95°	132.3	157.7	162.2	162.2	157.7
97.5°	220.2	243.8	253.8	253.8	253.8
100°	321.8	342.6	349.8	349.8	347.1
102.5°	428.7	444.1	454.1	456.9	454.1
105°	545.7	552.9	558.3	562.8	562.8
107.5°	661.6	672.6	672.6	674.3	661.6
110°	774.0	788.5	788.5	788.5	781.3

TEST NUMBER: P914126

CATALOG NUMBER: DFN2DIP-PN4F0-050D120US927-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	895.5	910.9	908.2	900.9	895.5
115°	1015.1	1029.7	1025.1	1022.4	1015.1
117.5°	1133.8	1153.8	1141.1	1133.8	1126.6
120°	1253.5	1273.4	1253.5	1253.5	1245.4
122.5°	1362.3	1387.7	1375.0	1367.7	1362.3
125°	1476.5	1499.1	1491.9	1483.8	1481.0
127.5°	1588.0	1616.0	1606.1	1595.2	1588.0
130°	1692.2	1724.8	1720.3	1714.8	1704.9
132.5°	1809.1	1834.5	1836.3	1823.6	1816.4
135°	1909.7	1937.8	1943.3	1940.5	1933.3
137.5°	2022.1	2044.8	2049.3	2047.5	2036.6
140°	2120.9	2143.6	2156.2	2156.2	2146.3
142.5°	2222.5	2245.1	2252.3	2255.0	2245.1
145°	2318.5	2336.6	2351.1	2353.9	2343.9
147.5°	2404.6	2427.2	2438.2	2442.7	2432.7
150°	2493.5	2508.8	2518.8	2527.0	2518.8
152.5°	2572.3	2587.7	2600.4	2610.4	2600.4
155°	2651.1	2658.4	2666.6	2679.2	2671.1
157.5°	2719.2	2724.5	2729.1	2747.2	2734.5
160°	2779.8	2785.3	2788.0	2803.4	2792.5
162.5°	2836.0	2836.0	2838.8	2856.0	2843.3
165°	2884.1	2881.4	2881.4	2899.5	2886.8
167.5°	2927.6	2919.4	2919.4	2937.6	2924.9
170°	2960.2	2952.9	2950.2	2968.4	2952.9
172.5°	2982.9	2975.6	2972.9	2991.0	2975.6
175°	3001.0	2993.7	2988.3	3006.4	2991.0
177.5°	3011.0	3003.7	2998.2	3013.7	2998.2
180°	3006.4	3006.4	3006.4	3006.4	3006.4

TEST NUMBER: P914126

CATALOG NUMBER: DFN2DIP-PN4F0-050D120US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.35	6.03	6.47	7.15	8.69	1.31	2.00	2.44	3.11	4.66
	3H	7.02	7.63	8.15	8.75	10.32	2.49	3.10	3.63	4.23	5.79
	4H	7.62	8.20	8.76	9.32	10.89	2.94	3.51	4.08	4.64	6.21
	6H	8.04	8.57	9.19	9.70	11.28	3.25	3.78	4.40	4.91	6.49
	8H	8.16	8.67	9.32	9.81	11.38	3.34	3.84	4.49	4.98	6.56
	12H	8.22	8.70	9.38	9.84	11.43	3.38	3.86	4.53	4.99	6.59
4H	2H	5.35	5.93	6.50	7.05	8.62	1.89	2.47	3.04	3.60	5.17
	3H	7.17	7.65	8.32	8.80	10.38	3.23	3.71	4.39	4.86	6.44
	4H	7.86	8.30	9.01	9.44	11.04	3.77	4.22	4.93	5.35	6.96
	6H	8.37	8.74	9.53	9.91	11.50	4.18	4.56	5.35	5.73	7.32
	8H	8.54	8.89	9.70	10.05	11.65	4.31	4.66	5.47	5.82	7.43
	12H	8.63	8.95	9.81	10.11	11.73	4.37	4.69	5.55	5.85	7.47
8H	4H	7.81	8.17	8.98	9.32	10.93	4.04	4.40	5.21	5.55	7.16
	6H	8.38	8.67	9.56	9.86	11.47	4.56	4.85	5.74	6.04	7.65
	8H	8.59	8.85	9.78	10.02	11.65	4.75	5.00	5.94	6.18	7.80
	12H	8.73	8.95	9.92	10.12	11.78	4.86	5.09	6.05	6.26	7.91
12H	4H	7.76	8.08	8.94	9.24	10.86	4.04	4.36	5.22	5.53	7.14
	6H	8.35	8.61	9.54	9.78	11.40	4.61	4.86	5.80	6.04	7.66
	8H	8.57	8.79	9.76	9.96	11.62	4.81	5.04	6.00	6.21	7.86

END OF REPORT