

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914158

Luminaire Tested: DFN2DIP-PN4F0-060D110US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914158
REPORT IS A COMBINATION OF REPORTS P899740 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-060D110US927-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11752.0 lumens
Efficiency: N/A
Efficacy: 80.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 146.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914158

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US927-RLLFLL

Luminous Intensity Polar Plot

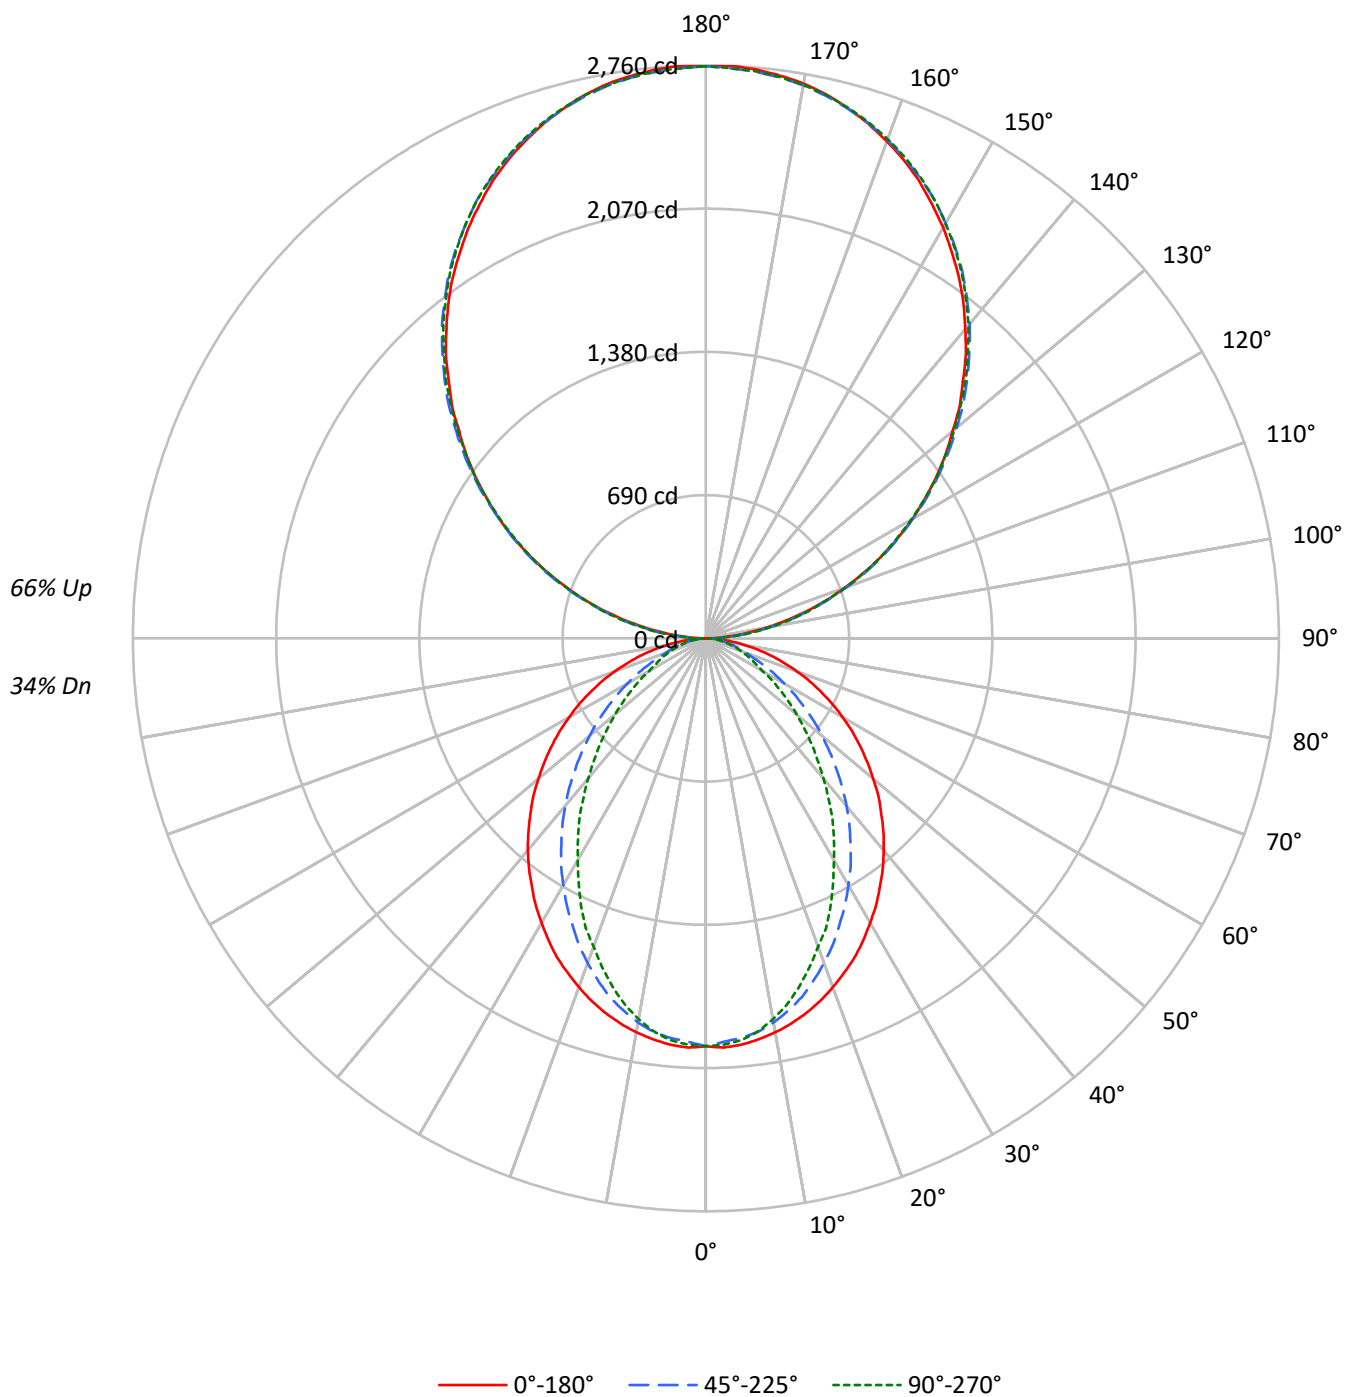

TEST NUMBER: P914158

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US927-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	75	75	75	58	58	58	42	42	42
1	95	91	87	84	85	82	79	76	66	64	62	51	50	48	37	37	36
2	86	79	74	69	78	72	67	63	58	55	52	45	43	41	33	32	31
3	79	70	63	58	71	64	58	53	51	47	44	40	37	35	30	28	27
4	72	62	55	49	65	56	50	45	46	41	38	36	33	30	27	25	23
5	66	55	48	42	60	50	44	39	41	36	32	32	29	26	24	22	20
6	61	50	42	36	55	45	39	34	37	32	28	29	26	23	22	20	18
7	57	45	37	32	51	41	34	30	34	29	25	27	23	21	20	18	16
8	53	41	33	28	47	37	31	26	31	26	22	25	21	18	19	16	15
9	49	37	30	25	44	34	28	23	28	23	20	23	19	17	17	15	13
10	46	34	27	23	41	31	25	21	26	21	18	21	17	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1434	1434	1434
5°	1436	1411	1420
10°	1422	1384	1374
15°	1402	1338	1303
20°	1377	1276	1216
25°	1350	1205	1131
30°	1314	1133	1024
35°	1280	1055	930
40°	1244	974	822
45°	1203	885	724
50°	1160	795	628
55°	1116	698	536
60°	1064	598	442
65°	1005	495	398
70°	933	399	360
75°	843	353	329
80°	712	296	286
85°	496	199	216

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2157 cd/sqm

TEST NUMBER: P914158

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US927-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	184.1	1.6
10°-20°	505.4	4.3
20°-30°	709.6	6.0
30°-40°	773.5	6.6
40°-50°	710.9	6.0
50°-60°	558.3	4.8
60°-70°	363.4	3.1
70°-80°	187.1	1.6
80°-90°	55.6	0.5
90°-100°	170.5	1.5
100°-110°	541.8	4.6
110°-120°	927.3	7.9
120°-130°	1219.5	10.4
130°-140°	1368.8	11.6
140°-150°	1342.3	11.4
150°-160°	1126.0	9.6
160°-170°	746.7	6.4
170°-180°	261.0	2.2
0°-30°	1399.1	11.9
0°-40°	2172.6	18.5
0°-60°	3441.9	29.3
0°-90°	4047.9	34.4
90°-120°	1639.7	14.0
90°-150°	5570.3	47.4
90°-180°	7704.0	65.6
0°-180°	11752.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1964	1964	1964	1964	1964	
5°	1964	1956	1932	1948	1943	186
15°	1868	1849	1788	1755	1737	527
25°	1696	1639	1522	1449	1422	780
35°	1461	1371	1214	1102	1063	915
45°	1195	1076	889	763	720	923
55°	908	770	578	471	437	812
65°	613	469	309	249	244	608
75°	327	203	142	130	128	346
85°	76	39	34	34	34	88
90°	2	30	81	76	79	12
95°	121	145	149	149	145	135
105°	500	507	512	516	516	528
115°	931	944	940	937	931	920
125°	1353	1374	1368	1360	1358	1209
135°	1751	1776	1781	1779	1772	1353
145°	2125	2142	2155	2158	2149	1328
155°	2430	2437	2444	2456	2448	1119
165°	2644	2641	2641	2658	2646	746
175°	2751	2744	2739	2756	2742	261
180°	2756	2756	2756	2756	2756	

TEST NUMBER: P914158

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1964.5	1964.5	1964.5	1964.5	1964.5
2.5°	1973.3	1964.5	1944.8	1962.7	1959.1
5°	1964.5	1955.6	1932.4	1948.4	1943.1
7.5°	1948.4	1937.8	1913.0	1919.9	1911.1
10°	1927.1	1914.6	1879.2	1873.7	1863.1
12.5°	1900.5	1884.4	1836.4	1825.8	1806.2
15°	1868.4	1848.8	1788.4	1754.7	1736.9
17.5°	1831.1	1802.6	1727.9	1688.9	1660.4
20°	1788.4	1752.8	1664.0	1619.6	1580.4
22.5°	1742.2	1701.3	1598.1	1537.8	1511.2
25°	1696.1	1639.1	1521.8	1449.0	1422.2
27.5°	1641.0	1580.4	1450.6	1367.1	1326.2
30°	1582.3	1514.6	1372.4	1281.8	1233.7
32.5°	1525.3	1443.5	1297.9	1191.1	1146.6
35°	1461.4	1370.7	1214.3	1102.2	1063.0
37.5°	1399.2	1301.2	1136.1	1013.3	968.9
40°	1333.3	1226.8	1054.2	928.0	881.8
42.5°	1265.8	1152.1	972.5	840.8	796.5
45°	1194.7	1075.5	889.0	762.6	719.9
47.5°	1127.2	1001.0	809.0	682.6	643.6
50°	1052.5	926.3	730.7	607.9	570.8
52.5°	979.5	846.1	656.0	538.7	504.9
55°	908.4	769.8	577.7	471.2	437.4
57.5°	835.6	693.3	508.5	408.9	380.4
60°	760.9	618.7	435.5	345.0	316.5
62.5°	688.1	545.9	373.3	288.0	273.9
65°	613.4	469.3	309.3	249.0	243.5
67.5°	542.2	398.2	249.0	218.6	213.3
70°	467.5	328.9	206.1	188.5	181.3
72.5°	396.5	264.8	172.4	158.3	154.6
75°	327.1	202.6	142.2	129.8	128.1
77.5°	257.9	143.9	112.0	104.9	101.3
80°	193.7	103.1	85.2	78.3	78.3
82.5°	135.1	69.4	58.6	55.1	55.1
85°	76.4	39.1	33.7	33.7	33.7
87.5°	28.5	14.2	14.2	12.4	12.4
90°	2.5	29.9	81.4	76.4	78.9
92.5°	51.5	69.8	72.2	74.8	74.8
95°	121.3	144.6	148.7	148.7	144.6
97.5°	201.9	223.5	232.7	232.7	232.7
100°	294.9	314.0	320.7	320.7	318.2
102.5°	393.0	407.1	416.3	418.7	416.3
105°	500.2	506.8	511.8	515.9	515.9
107.5°	606.5	616.5	616.5	618.1	606.5
110°	709.6	722.9	722.9	722.9	716.2

TEST NUMBER: P914158

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US927-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	820.9	835.0	832.5	825.8	820.9
115°	930.6	943.8	939.7	937.2	930.6
117.5°	1039.4	1057.6	1046.0	1039.4	1032.8
120°	1149.1	1167.4	1149.1	1149.1	1141.6
122.5°	1248.8	1272.0	1260.4	1253.7	1248.8
125°	1353.4	1374.2	1367.5	1360.1	1357.6
127.5°	1455.6	1481.4	1472.3	1462.3	1455.6
130°	1551.2	1581.1	1576.9	1571.9	1562.8
132.5°	1658.4	1681.6	1683.3	1671.7	1665.0
135°	1750.6	1776.3	1781.3	1778.8	1772.2
137.5°	1853.6	1874.4	1878.5	1876.8	1866.9
140°	1944.2	1964.9	1976.6	1976.6	1967.5
142.5°	2037.3	2058.0	2064.7	2067.1	2058.0
145°	2125.3	2141.9	2155.2	2157.7	2148.6
147.5°	2204.2	2225.0	2235.0	2239.1	2230.0
150°	2285.7	2299.8	2308.9	2316.4	2308.9
152.5°	2357.9	2372.0	2383.7	2392.9	2383.7
155°	2430.3	2436.8	2444.4	2456.0	2448.5
157.5°	2492.5	2497.5	2501.6	2518.3	2506.6
160°	2548.2	2553.2	2555.7	2569.8	2559.9
162.5°	2599.7	2599.7	2602.2	2618.0	2606.4
165°	2643.7	2641.2	2641.2	2657.8	2646.2
167.5°	2683.6	2676.1	2676.1	2692.8	2681.1
170°	2713.5	2706.9	2704.4	2721.0	2706.9
172.5°	2734.3	2727.6	2725.2	2741.8	2727.6
175°	2750.9	2744.3	2739.3	2755.9	2741.8
177.5°	2760.0	2753.4	2748.4	2762.6	2748.4
180°	2755.9	2755.9	2755.9	2755.9	2755.9

TEST NUMBER: P914158

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.75	7.47	7.83	8.55	10.03	2.71	3.43	3.80	4.51	5.99
	3H	8.42	9.06	9.51	10.15	11.65	3.89	4.54	4.99	5.63	7.12
	4H	9.03	9.63	10.13	10.72	12.23	4.34	4.95	5.44	6.04	7.54
	6H	9.44	10.00	10.56	11.10	12.61	4.66	5.22	5.77	6.31	7.82
	8H	9.57	10.10	10.69	11.21	12.72	4.74	5.28	5.86	6.39	7.89
	12H	9.63	10.13	10.75	11.24	12.77	4.78	5.29	5.91	6.39	7.92
4H	2H	6.75	7.36	7.86	8.45	9.95	3.30	3.90	4.41	5.00	6.50
	3H	8.57	9.08	9.69	10.20	11.71	4.64	5.14	5.76	6.26	7.78
	4H	9.26	9.73	10.39	10.84	12.37	5.18	5.65	6.30	6.75	8.29
	6H	9.78	10.17	10.91	11.30	12.83	5.60	5.99	6.72	7.12	8.65
	8H	9.95	10.32	11.08	11.44	12.99	5.72	6.09	6.85	7.22	8.76
	12H	10.04	10.38	11.19	11.51	13.06	5.78	6.12	6.93	7.25	8.80
8H	4H	9.22	9.60	10.35	10.72	12.26	5.46	5.83	6.58	6.95	8.49
	6H	9.79	10.10	10.94	11.26	12.80	5.97	6.28	7.12	7.44	8.98
	8H	10.01	10.27	11.16	11.42	12.98	6.16	6.43	7.32	7.57	9.14
	12H	10.14	10.38	11.30	11.52	13.12	6.28	6.51	7.44	7.65	9.25
12H	4H	9.17	9.51	10.32	10.64	12.19	5.46	5.79	6.60	6.93	8.47
	6H	9.76	10.03	10.92	11.18	12.74	6.02	6.29	7.18	7.43	8.99
	8H	9.98	10.22	11.14	11.36	12.95	6.23	6.46	7.39	7.60	9.20

END OF REPORT