

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914220

Luminaire Tested: DFN2DIP-PN4F0-080D090US927-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914220
REPORT IS A COMBINATION OF REPORTS P899707 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-080D090US927-FLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12583.8 lumens
Efficiency: N/A
Efficacy: 87.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 143.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914220

CATALOG NUMBER: DFN2DIP-PN4F0-080D090US927-FLLFLL

Luminous Intensity Polar Plot

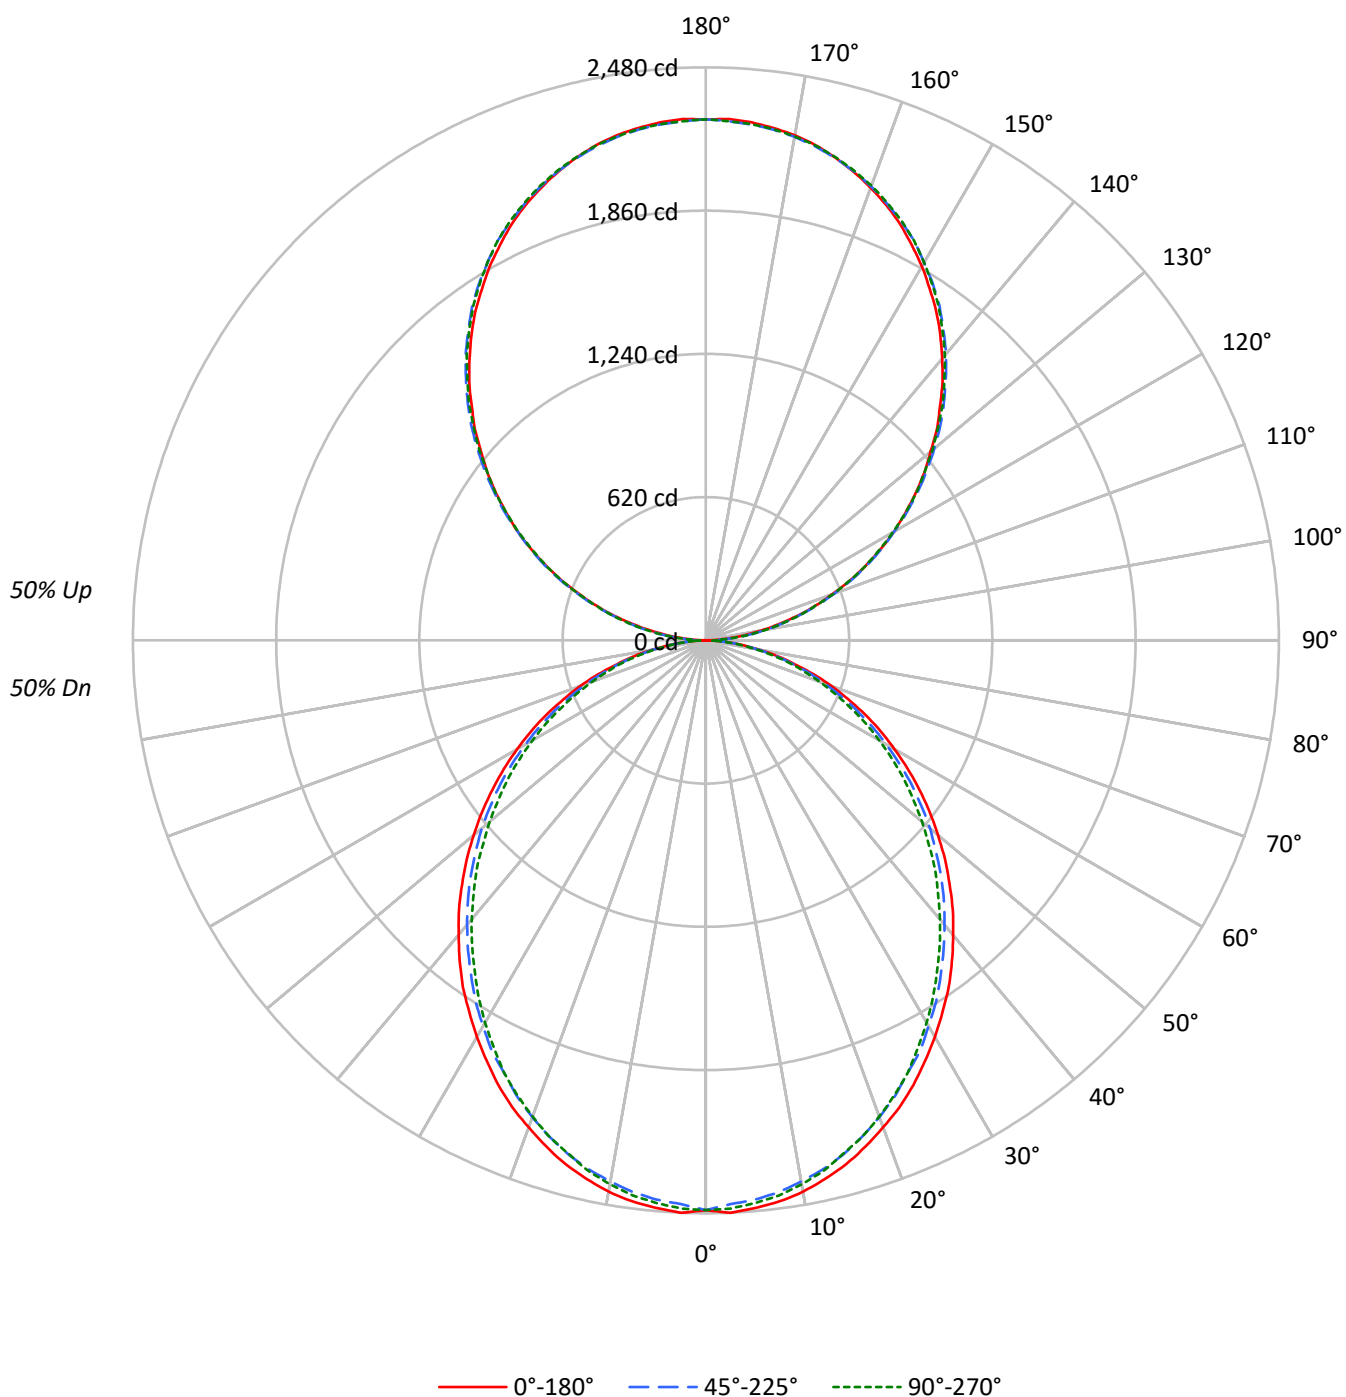

TEST NUMBER: P914220

CATALOG NUMBER: DFN2DIP-PN4F0-080D090US927-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56
1	98	93	90	86	90	86	83	80	73	71	68	61	59	58	50	48	47
2	89	82	75	70	82	75	70	66	64	60	57	53	51	48	44	42	40
3	81	72	64	59	75	66	60	55	56	52	48	47	44	41	39	36	34
4	74	63	56	50	68	59	52	46	50	45	41	42	38	35	35	32	29
5	68	57	48	42	63	53	45	40	45	39	35	38	34	30	31	28	25
6	63	51	43	37	58	47	40	35	40	35	31	34	30	26	28	25	22
7	58	46	38	32	53	43	36	30	37	31	27	31	27	23	26	22	20
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	24	20	18
9	50	38	30	25	46	35	29	24	31	25	21	26	22	19	22	19	16
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1800	1800	1800
5°	1803	1775	1787
10°	1788	1752	1763
15°	1762	1723	1726
20°	1726	1683	1688
25°	1691	1635	1643
30°	1647	1591	1586
35°	1605	1539	1527
40°	1553	1486	1470
45°	1502	1433	1411
50°	1445	1377	1344
55°	1386	1313	1282
60°	1320	1237	1211
65°	1247	1158	1127
70°	1154	1061	1037
75°	1026	946	955
80°	872	800	796
85°	630	546	533

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1766 cd/sqm

TEST NUMBER: P914220

CATALOG NUMBER: DFN2DIP-PN4F0-080D090US927-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.1	1.8
10°-20°	653.0	5.2
20°-30°	959.7	7.6
30°-40°	1114.6	8.9
40°-50°	1113.2	8.8
50°-60°	970.7	7.7
60°-70°	717.6	5.7
70°-80°	406.0	3.2
80°-90°	113.6	0.9
90°-100°	139.5	1.1
100°-110°	443.3	3.5
110°-120°	758.7	6.0
120°-130°	997.8	7.9
130°-140°	1120.0	8.9
140°-150°	1098.2	8.7
150°-160°	921.3	7.3
160°-170°	611.0	4.9
170°-180°	213.5	1.7
0°-30°	1844.8	14.7
0°-40°	2959.4	23.5
0°-60°	5043.4	40.1
0°-90°	6280.5	49.9
90°-120°	1341.5	10.7
90°-150°	4557.5	36.2
90°-180°	6303.0	50.1
0°-180°	12583.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2466	2466	2466	2466	2466	
5°	2466	2457	2430	2449	2445	234
15°	2348	2333	2302	2312	2300	661
25°	2125	2106	2066	2070	2066	978
35°	1833	1809	1771	1757	1745	1145
45°	1492	1475	1439	1413	1404	1151
55°	1129	1114	1086	1058	1046	1009
65°	761	747	723	702	690	753
75°	398	394	382	368	372	425
85°	97	95	93	85	83	108
90°	2	24	67	62	65	12
95°	99	118	122	122	118	110
105°	409	415	419	422	422	432
115°	761	772	769	767	761	753
125°	1107	1124	1119	1113	1111	990
135°	1432	1453	1458	1455	1450	1107
145°	1739	1752	1763	1765	1758	1086
155°	1988	1994	2000	2009	2003	915
165°	2163	2161	2161	2175	2165	610
175°	2251	2245	2241	2255	2243	214
180°	2255	2255	2255	2255	2255	

TEST NUMBER: P914220

CATALOG NUMBER: DFN2DIP-PN4F0-080D090US927-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2465.9	2465.9	2465.9	2465.9	2465.9
2.5°	2480.2	2468.4	2442.3	2465.9	2461.4
5°	2465.9	2456.6	2430.5	2449.3	2444.8
7.5°	2449.3	2435.2	2409.1	2428.2	2423.4
10°	2423.4	2406.8	2378.4	2397.2	2390.2
12.5°	2387.7	2373.6	2345.2	2357.0	2352.2
15°	2347.5	2333.4	2302.4	2312.0	2300.2
17.5°	2297.6	2283.5	2252.6	2264.4	2252.6
20°	2243.1	2229.0	2195.8	2202.8	2193.5
22.5°	2188.7	2167.3	2136.4	2136.4	2131.6
25°	2124.6	2105.7	2065.5	2070.0	2065.5
27.5°	2053.3	2036.8	2006.0	1999.0	1987.2
30°	1982.4	1963.3	1927.9	1920.8	1911.2
32.5°	1906.5	1892.4	1854.3	1840.0	1830.5
35°	1832.9	1809.3	1771.3	1757.0	1745.2
37.5°	1749.9	1728.5	1690.6	1674.0	1662.2
40°	1664.7	1645.5	1607.6	1586.4	1576.8
42.5°	1581.7	1562.5	1524.8	1500.9	1486.8
45°	1491.6	1475.0	1439.2	1413.3	1403.8
47.5°	1403.8	1387.2	1349.2	1323.0	1308.9
50°	1311.2	1299.4	1266.1	1233.0	1221.1
52.5°	1221.1	1204.5	1173.9	1147.7	1131.1
55°	1128.8	1114.4	1086.1	1057.6	1045.8
57.5°	1036.3	1024.4	993.5	965.0	955.4
60°	943.6	934.4	901.1	875.0	867.9
62.5°	853.6	837.0	813.3	789.7	780.1
65°	761.3	746.9	723.3	701.9	690.1
67.5°	666.4	654.3	633.2	616.6	607.0
70°	578.6	569.0	547.7	531.1	521.7
72.5°	488.5	479.0	467.1	450.6	443.5
75°	398.2	393.7	381.7	367.6	372.3
77.5°	317.7	308.2	303.4	296.4	289.3
80°	237.3	234.7	230.0	222.9	218.1
82.5°	161.3	161.3	159.0	149.4	149.4
85°	97.1	94.8	92.6	85.3	83.0
87.5°	42.8	38.0	33.2	26.1	23.7
90°	2.1	24.5	66.6	62.5	64.6
92.5°	42.1	57.1	59.2	61.2	61.2
95°	99.3	118.3	121.7	121.7	118.3
97.5°	165.2	182.8	190.4	190.4	190.4
100°	241.3	257.0	262.4	262.4	260.4
102.5°	321.5	333.1	340.6	342.6	340.6
105°	409.2	414.6	418.7	422.2	422.2
107.5°	496.2	504.4	504.4	505.7	496.2
110°	580.5	591.4	591.4	591.4	586.0



TEST NUMBER: P914220

CATALOG NUMBER: DFN2DIP-PN4F0-080D090US927-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	671.6	683.2	681.1	675.7	671.6
115°	761.4	772.2	768.8	766.8	761.4
117.5°	850.4	865.4	855.9	850.4	844.9
120°	940.2	955.1	940.2	940.2	934.0
122.5°	1021.7	1040.8	1031.3	1025.8	1021.7
125°	1107.4	1124.3	1119.0	1112.8	1110.8
127.5°	1191.0	1212.0	1204.6	1196.4	1191.0
130°	1269.2	1293.6	1290.2	1286.1	1278.7
132.5°	1356.8	1375.9	1377.2	1367.7	1362.3
135°	1432.3	1453.3	1457.5	1455.4	1450.0
137.5°	1516.6	1533.6	1537.0	1535.6	1527.5
140°	1590.7	1607.7	1617.2	1617.2	1609.7
142.5°	1666.8	1683.8	1689.2	1691.3	1683.8
145°	1738.9	1752.5	1763.3	1765.4	1757.9
147.5°	1803.5	1820.4	1828.6	1832.0	1824.6
150°	1870.1	1881.7	1889.1	1895.2	1889.1
152.5°	1929.2	1940.8	1950.3	1957.8	1950.3
155°	1988.4	1993.8	1999.9	2009.4	2003.3
157.5°	2039.3	2043.4	2046.8	2060.4	2050.9
160°	2084.9	2089.0	2091.0	2102.5	2094.4
162.5°	2127.0	2127.0	2129.1	2142.0	2132.5
165°	2163.1	2161.0	2161.0	2174.6	2165.1
167.5°	2195.7	2189.6	2189.6	2203.1	2193.6
170°	2220.2	2214.7	2212.7	2226.3	2214.7
172.5°	2237.1	2231.7	2229.7	2243.3	2231.7
175°	2250.7	2245.3	2241.2	2254.9	2243.3
177.5°	2258.2	2252.8	2248.7	2260.3	2248.7
180°	2254.9	2254.9	2254.9	2254.9	2254.9

TEST NUMBER: P914220

CATALOG NUMBER: DFN2DIP-PN4F0-080D090US927-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.31	10.17	10.27	11.15	12.42	8.87	9.73	9.83	10.70	11.98
	3H	10.97	11.75	11.94	12.73	14.02	10.49	11.26	11.46	12.24	13.54
	4H	11.56	12.29	12.55	13.28	14.58	11.08	11.81	12.06	12.79	14.10
	6H	11.97	12.64	12.96	13.63	14.95	11.47	12.15	12.47	13.14	14.45
	8H	12.07	12.71	13.07	13.72	15.03	11.58	12.22	12.58	13.23	14.54
	12H	12.12	12.73	13.13	13.73	15.07	11.62	12.23	12.63	13.23	14.57
4H	2H	9.77	10.50	10.76	11.49	12.79	9.42	10.15	10.41	11.14	12.44
	3H	11.64	12.25	12.64	13.27	14.58	11.24	11.85	12.24	12.86	14.18
	4H	12.36	12.92	13.36	13.92	15.26	11.94	12.50	12.95	13.51	14.85
	6H	12.88	13.36	13.89	14.39	15.73	12.45	12.93	13.47	13.96	15.30
	8H	13.03	13.48	14.05	14.50	15.85	12.60	13.05	13.62	14.07	15.42
	12H	13.10	13.51	14.14	14.55	15.91	12.66	13.07	13.70	14.11	15.46
8H	4H	12.55	13.00	13.57	14.03	15.38	12.18	12.63	13.20	13.66	15.01
	6H	13.19	13.56	14.23	14.63	15.98	12.81	13.18	13.86	14.25	15.60
	8H	13.41	13.74	14.46	14.79	16.16	13.03	13.35	14.08	14.41	15.78
	12H	13.55	13.83	14.60	14.88	16.29	13.14	13.43	14.20	14.48	15.89
12H	4H	12.54	12.95	13.58	13.99	15.34	12.18	12.58	13.22	13.62	14.98
	6H	13.22	13.55	14.27	14.60	15.97	12.85	13.18	13.91	14.23	15.60
	8H	13.46	13.75	14.52	14.80	16.21	13.09	13.38	14.15	14.43	15.84