

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914289

Luminaire Tested: DFN2DIP-PN4F0-100D080US927-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914289
REPORT IS A COMBINATION OF REPORTS P901213 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-100D080US927-FLLONL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14116.6 lumens
Efficiency: N/A
Efficacy: 88.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 158.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914289
CATALOG NUMBER: DFN2DIP-PN4F0-100D080US927-FLLONL

Luminous Intensity Polar Plot

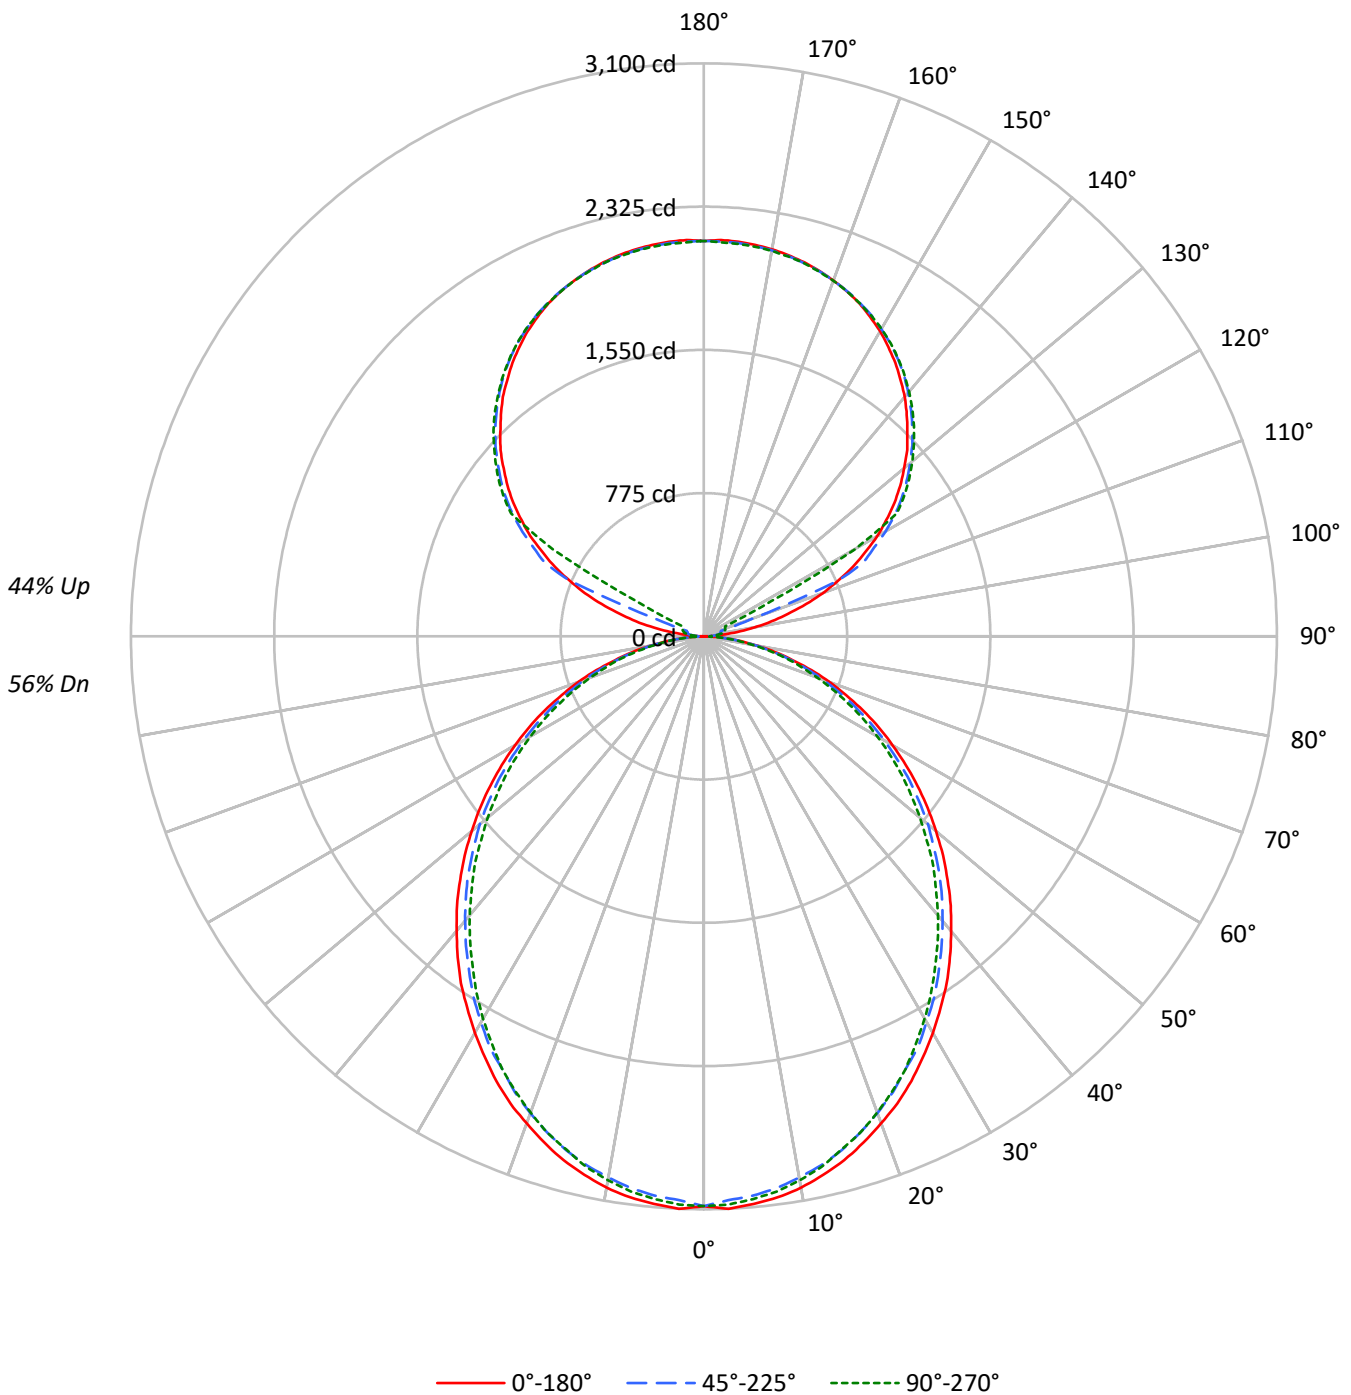



TEST NUMBER: P914289
 CATALOG NUMBER: DFN2DIP-PN4F0-100D080US927-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	56
1	99	95	91	87	92	88	85	82	76	73	71	65	63	61	54	53	52	47
2	90	83	76	71	84	77	72	67	66	62	59	57	54	51	48	46	44	39
3	82	73	65	59	76	68	61	56	59	54	50	50	46	43	42	39	37	33
4	75	64	56	50	70	60	53	48	52	47	42	45	40	37	38	35	32	29
5	69	57	49	43	64	54	46	41	47	41	36	40	36	32	34	31	28	25
6	64	52	43	37	59	48	41	36	42	36	32	36	32	28	31	27	25	22
7	59	47	39	33	55	44	36	31	38	32	28	33	28	25	28	25	22	19
8	55	42	34	29	51	40	33	28	35	29	25	30	26	22	26	22	20	17
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	18	16
10	48	35	28	23	44	33	27	22	29	24	20	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2250	2250	2250
5°	2254	2219	2234
10°	2235	2189	2204
15°	2202	2154	2157
20°	2158	2104	2109
25°	2114	2044	2054
30°	2058	1989	1983
35°	2006	1923	1908
40°	1941	1857	1837
45°	1877	1791	1764
50°	1807	1722	1680
55°	1733	1641	1603
60°	1650	1546	1514
65°	1559	1447	1409
70°	1443	1327	1297
75°	1282	1183	1194
80°	1089	999	996
85°	788	682	666

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1877 cd/sqm



TEST NUMBER: P914289

CATALOG NUMBER: DFN2DIP-PN4F0-100D080US927-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	290.1	2.1
10°-20°	816.3	5.8
20°-30°	1199.6	8.5
30°-40°	1393.3	9.9
40°-50°	1391.5	9.9
50°-60°	1213.4	8.6
60°-70°	897.0	6.4
70°-80°	507.5	3.6
80°-90°	137.7	1.0
90°-100°	70.5	0.5
100°-110°	262.9	1.9
110°-120°	697.3	4.9
120°-130°	1156.5	8.2
130°-140°	1228.4	8.7
140°-150°	1141.7	8.1
150°-160°	917.9	6.5
160°-170°	591.5	4.2
170°-180°	203.6	1.4
0°-30°	2306.0	16.3
0°-40°	3699.3	26.2
0°-60°	6304.2	44.7
0°-90°	7846.3	55.6
90°-120°	1030.7	7.3
90°-150°	4557.3	32.3
90°-180°	6270.0	44.4
0°-180°	14116.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3082	3082	3082	3082	3082	
5°	3082	3071	3038	3062	3056	293
15°	2934	2917	2878	2890	2875	826
25°	2656	2632	2582	2587	2582	1222
35°	2291	2262	2214	2196	2181	1431
45°	1864	1844	1799	1767	1755	1439
55°	1411	1393	1358	1322	1307	1262
65°	952	934	904	877	863	941
75°	498	492	477	460	465	531
85°	121	119	116	107	104	135
90°	2	18	31	39	42	13
95°	100	49	60	68	66	119
105°	470	517	94	111	118	503
115°	890	916	955	238	127	876
125°	1258	1278	1308	1319	1323	1122
135°	1557	1582	1596	1611	1608	1203
145°	1806	1804	1831	1842	1834	1130
155°	1989	1975	1993	2003	1990	916
165°	2096	2086	2091	2102	2091	592
175°	2143	2133	2136	2146	2131	204
180°	2139	2139	2139	2139	2139	



TEST NUMBER: P914289

CATALOG NUMBER: DFN2DIP-PN4F0-100D080US927-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3082.5	3082.5	3082.5	3082.5	3082.5
2.5°	3100.4	3085.5	3052.8	3082.5	3076.8
5°	3082.5	3070.8	3038.1	3061.7	3056.0
7.5°	3061.7	3044.0	3011.3	3035.2	3029.3
10°	3029.3	3008.5	2973.0	2996.6	2987.8
12.5°	2984.6	2967.0	2931.5	2946.3	2940.3
15°	2934.3	2916.7	2878.0	2890.0	2875.2
17.5°	2872.1	2854.5	2815.7	2830.5	2815.7
20°	2803.8	2786.2	2744.7	2753.5	2741.8
22.5°	2735.9	2709.2	2670.4	2670.4	2664.5
25°	2655.7	2632.1	2581.8	2587.4	2581.8
27.5°	2566.7	2545.9	2507.6	2498.8	2484.0
30°	2478.0	2454.1	2409.7	2400.9	2389.0
32.5°	2383.0	2365.5	2317.9	2300.0	2288.1
35°	2291.2	2261.7	2214.1	2196.2	2181.4
37.5°	2187.4	2160.7	2113.2	2092.5	2077.7
40°	2080.8	2056.9	2009.4	1983.1	1971.1
42.5°	1977.0	1953.1	1906.0	1876.1	1858.5
45°	1864.5	1843.7	1799.0	1766.6	1754.8
47.5°	1754.8	1734.0	1686.5	1653.8	1636.2
50°	1639.0	1624.2	1582.7	1541.2	1526.5
52.5°	1526.5	1505.7	1467.3	1434.6	1413.9
55°	1411.0	1393.1	1357.6	1322.0	1307.3
57.5°	1295.3	1280.5	1241.8	1206.3	1194.4
60°	1179.6	1167.9	1126.4	1093.7	1084.9
62.5°	1067.0	1046.2	1016.7	987.1	975.2
65°	951.6	933.7	904.1	877.3	862.6
67.5°	833.1	817.9	791.5	770.8	758.8
70°	723.3	711.3	684.6	663.8	652.2
72.5°	610.7	598.7	584.0	563.2	554.4
75°	497.8	492.2	477.1	459.5	465.4
77.5°	397.2	385.2	379.2	370.4	361.6
80°	296.5	293.4	287.4	278.6	272.7
82.5°	201.6	201.6	198.8	186.8	186.8
85°	121.4	118.6	115.7	106.6	103.8
87.5°	53.5	47.5	41.5	32.7	29.5
90°	1.5	18.5	30.9	38.7	41.7
92.5°	38.7	32.6	37.2	40.2	41.7
95°	100.5	49.4	60.3	68.2	66.5
97.5°	181.0	54.2	78.8	83.7	85.1
100°	274.0	61.9	88.2	100.5	103.6
102.5°	376.0	373.0	91.3	108.2	113.0
105°	470.5	517.0	94.4	111.4	117.6
107.5°	580.4	618.9	97.6	114.5	120.7
110°	685.7	718.0	270.9	116.1	122.2



TEST NUMBER: P914289

CATALOG NUMBER: DFN2DIP-PN4F0-100D080US927-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	784.7	812.5	786.2	119.1	123.9
115°	889.9	916.2	954.9	238.4	127.0
117.5°	981.2	1012.1	1038.5	817.1	411.7
120°	1083.4	1106.5	1134.5	1153.0	944.0
122.5°	1169.9	1194.8	1225.8	1235.0	1236.7
125°	1258.1	1278.3	1307.7	1318.6	1323.2
127.5°	1338.6	1360.3	1383.7	1399.1	1400.6
130°	1414.5	1439.3	1456.3	1473.4	1471.9
132.5°	1491.9	1512.1	1529.1	1543.0	1541.5
135°	1557.0	1581.7	1595.5	1611.2	1608.0
137.5°	1625.0	1643.5	1659.1	1674.6	1670.0
140°	1691.5	1704.0	1720.9	1734.9	1727.1
142.5°	1747.4	1758.2	1778.2	1790.6	1782.8
145°	1806.2	1804.5	1830.8	1841.7	1833.9
147.5°	1857.1	1852.5	1878.7	1886.5	1880.4
150°	1906.7	1895.8	1920.6	1929.8	1922.1
152.5°	1948.4	1936.1	1959.2	1968.6	1957.8
155°	1988.7	1974.9	1993.4	2002.6	1990.4
157.5°	2021.2	2008.9	2022.8	2033.7	2021.2
160°	2049.1	2039.8	2049.1	2058.3	2047.5
162.5°	2073.8	2064.6	2072.3	2083.1	2069.2
165°	2095.5	2086.3	2090.9	2101.7	2090.9
167.5°	2112.5	2103.2	2107.9	2118.8	2104.8
170°	2126.5	2117.1	2120.3	2131.1	2117.1
172.5°	2135.7	2126.5	2129.6	2140.5	2126.5
175°	2143.4	2132.6	2135.7	2146.5	2131.1
177.5°	2146.5	2135.7	2137.3	2148.2	2134.2
180°	2138.8	2138.8	2138.8	2138.8	2138.8



TEST NUMBER: P914289
 CATALOG NUMBER: DFN2DIP-PN4F0-100D080US927-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.60	11.51	11.50	12.44	13.63	10.16	11.07	11.06	12.00	13.19
	3H	12.26	13.08	13.18	14.02	15.23	11.78	12.60	12.70	13.54	14.75
	4H	12.86	13.63	13.79	14.57	15.80	12.37	13.14	13.30	14.09	15.31
	6H	13.26	13.98	14.21	14.92	16.16	12.77	13.48	13.71	14.43	15.67
	8H	13.37	14.05	14.32	15.01	16.25	12.88	13.56	13.83	14.52	15.75
	12H	13.42	14.07	14.38	15.03	16.29	12.92	13.57	13.88	14.53	15.79
4H	2H	11.06	11.84	12.00	12.78	14.00	10.71	11.49	11.65	12.43	13.65
	3H	12.94	13.59	13.89	14.56	15.79	12.54	13.18	13.49	14.16	15.39
	4H	13.66	14.25	14.62	15.21	16.48	13.24	13.83	14.20	14.80	16.06
	6H	14.18	14.69	15.15	15.68	16.94	13.75	14.26	14.73	15.25	16.51
	8H	14.33	14.81	15.31	15.79	17.07	13.90	14.38	14.88	15.36	16.64
	12H	14.41	14.84	15.40	15.84	17.12	13.97	14.40	14.96	15.40	16.68
8H	4H	13.86	14.33	14.83	15.32	16.59	13.49	13.96	14.46	14.95	16.22
	6H	14.50	14.89	15.50	15.91	17.19	14.12	14.51	15.12	15.54	16.81
	8H	14.72	15.07	15.73	16.08	17.37	14.33	14.68	15.34	15.69	16.99
	12H	14.85	15.16	15.87	16.17	17.50	14.45	14.76	15.46	15.77	17.10
12H	4H	13.85	14.28	14.84	15.28	16.56	13.48	13.91	14.48	14.91	16.19
	6H	14.53	14.87	15.53	15.89	17.18	14.16	14.51	15.17	15.52	16.81
	8H	14.77	15.08	15.79	16.09	17.42	14.40	14.71	15.41	15.71	17.05