

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914323

Luminaire Tested: DFN2DIP-PN4F0-110D070US927-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914323
REPORT IS A COMBINATION OF REPORTS P901198 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-110D070US927-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12896.7 lumens
Efficiency: N/A
Efficacy: 77.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 166.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914323

CATALOG NUMBER: DFN2DIP-PN4F0-110D070US927-RLLONL

Luminous Intensity Polar Plot

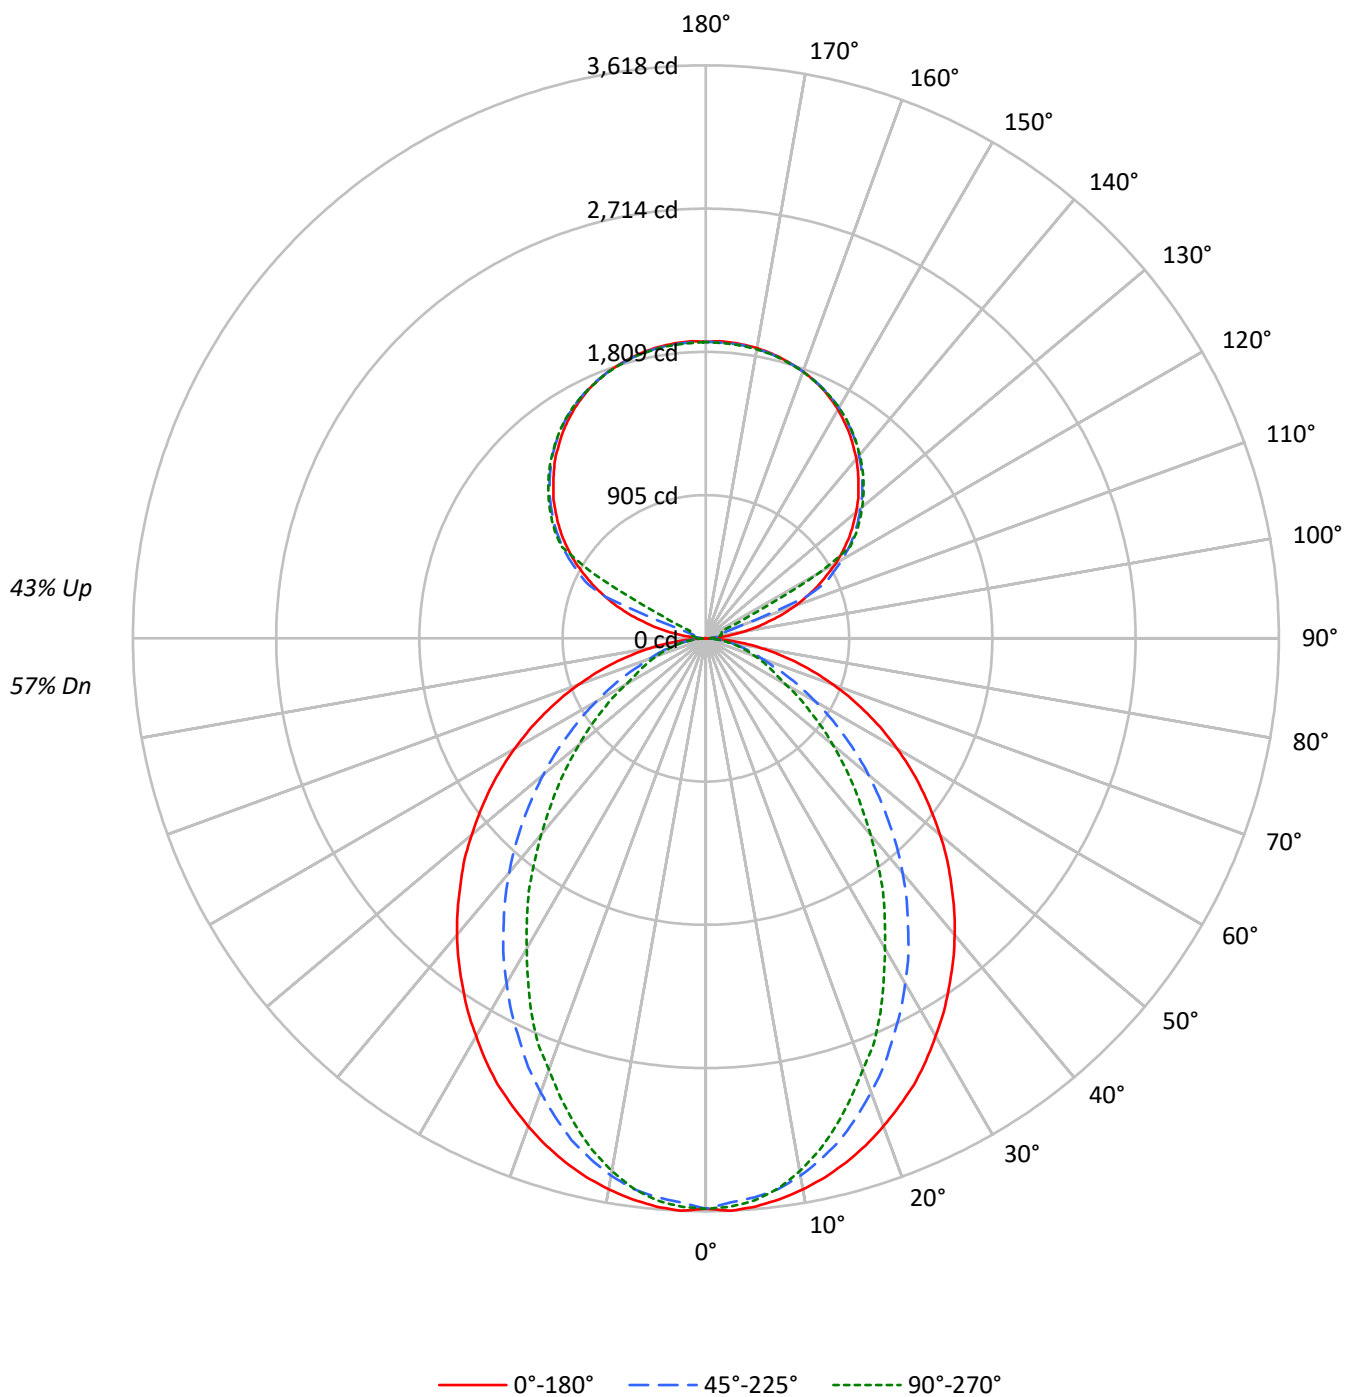

TEST NUMBER: P914323

CATALOG NUMBER: DFN2DIP-PN4F0-110D070US927-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	75	75	75	63	63	63
1	100	96	92	89	93	89	86	83	78	75	73	67	65	63	57	55	54
2	92	84	78	73	85	79	74	69	69	65	61	59	56	54	50	48	47
3	84	75	68	62	78	70	64	59	61	56	52	53	49	46	45	43	40
4	77	66	59	53	72	62	56	50	55	49	45	47	43	40	41	38	35
5	71	60	52	46	66	56	49	44	49	44	39	43	39	35	37	34	31
6	66	54	46	40	61	51	43	38	45	39	35	39	35	31	34	30	28
7	61	49	41	35	57	46	39	34	41	35	31	36	31	28	31	27	25
8	57	44	37	32	53	42	35	30	37	32	28	33	28	25	29	25	22
9	53	41	33	28	49	38	32	27	34	29	25	30	26	23	27	23	20
10	49	37	30	26	46	35	29	25	32	26	23	28	24	21	25	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2629	2629	2629
5°	2633	2588	2604
10°	2607	2537	2520
15°	2571	2454	2389
20°	2524	2338	2229
25°	2475	2209	2074
30°	2410	2077	1877
35°	2346	1934	1705
40°	2281	1786	1507
45°	2205	1623	1327
50°	2127	1457	1152
55°	2045	1280	983
60°	1951	1096	810
65°	1842	908	729
70°	1710	732	661
75°	1545	646	602
80°	1305	543	524
85°	909	365	397

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2205 cd/sqm

TEST NUMBER: P914323

CATALOG NUMBER: DFN2DIP-PN4F0-110D070US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	337.5	2.6
10°-20°	926.6	7.2
20°-30°	1300.9	10.1
30°-40°	1418.1	11.0
40°-50°	1303.4	10.1
50°-60°	1023.6	7.9
60°-70°	666.3	5.2
70°-80°	343.0	2.7
80°-90°	90.8	0.7
90°-100°	61.7	0.5
100°-110°	230.0	1.8
110°-120°	610.1	4.7
120°-130°	1011.9	7.8
130°-140°	1074.9	8.3
140°-150°	999.0	7.7
150°-160°	803.2	6.2
160°-170°	517.5	4.0
170°-180°	178.1	1.4
0°-30°	2565.1	19.9
0°-40°	3983.1	30.9
0°-60°	6310.1	48.9
0°-90°	7410.2	57.5
90°-120°	901.9	7.0
90°-150°	3987.7	30.9
90°-180°	5487.0	42.5
0°-180°	12896.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3602	3602	3602	3602	3602	
5°	3602	3585	3543	3572	3562	341
15°	3426	3390	3279	3217	3184	965
25°	3109	3005	2790	2656	2607	1430
35°	2679	2513	2226	2021	1949	1677
45°	2190	1972	1630	1398	1320	1691
55°	1665	1411	1059	864	802	1488
65°	1124	860	567	456	446	1115
75°	600	371	261	238	235	634
85°	140	72	62	62	62	161
90°	1	16	27	34	36	12
95°	88	43	53	60	58	104
105°	412	452	83	97	103	440
115°	779	802	836	209	111	767
125°	1101	1119	1144	1154	1158	982
135°	1362	1384	1396	1410	1407	1052
145°	1580	1579	1602	1612	1605	988
155°	1740	1728	1744	1752	1742	802
165°	1834	1826	1830	1839	1830	518
175°	1876	1866	1869	1878	1865	178
180°	1871	1871	1871	1871	1871	

TEST NUMBER: P914323

CATALOG NUMBER: DFN2DIP-PN4F0-110D070US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3601.5	3601.5	3601.5	3601.5	3601.5
2.5°	3617.7	3601.5	3565.5	3598.4	3591.8
5°	3601.5	3585.3	3542.7	3572.1	3562.4
7.5°	3572.1	3552.7	3507.1	3519.9	3503.6
10°	3533.0	3510.2	3445.2	3435.1	3415.8
12.5°	3484.3	3454.9	3366.7	3347.3	3311.3
15°	3425.5	3389.5	3278.8	3217.0	3184.4
17.5°	3357.0	3304.8	3167.9	3096.2	3044.0
20°	3278.8	3213.5	3050.6	2969.3	2897.4
22.5°	3194.2	3119.1	2930.0	2819.3	2770.5
25°	3109.4	3005.0	2789.9	2656.4	2607.3
27.5°	3008.5	2897.4	2659.5	2506.3	2431.3
30°	2900.9	2776.8	2516.0	2350.0	2261.8
32.5°	2796.5	2646.4	2379.4	2183.7	2102.1
35°	2679.2	2512.9	2226.3	2020.9	1948.9
37.5°	2565.2	2385.7	2082.7	1857.6	1776.4
40°	2444.4	2249.1	1932.7	1701.3	1616.6
42.5°	2320.6	2112.1	1783.0	1541.6	1460.3
45°	2190.3	1971.7	1629.8	1398.0	1319.9
47.5°	2066.5	1835.2	1483.1	1251.4	1179.9
50°	1929.5	1698.2	1339.7	1114.5	1046.4
52.5°	1795.7	1551.2	1202.7	987.6	925.7
55°	1665.3	1411.2	1059.1	863.8	801.9
57.5°	1531.9	1271.1	932.2	749.7	697.4
60°	1395.0	1134.2	798.4	632.5	580.3
62.5°	1261.5	1000.8	684.4	528.1	502.1
65°	1124.5	860.3	567.1	456.5	446.4
67.5°	994.2	730.0	456.5	400.8	391.1
70°	857.2	603.1	377.9	345.5	332.3
72.5°	726.8	485.5	316.1	290.1	283.5
75°	599.6	371.4	260.7	237.9	234.8
77.5°	472.7	263.9	205.4	192.3	185.7
80°	355.1	189.2	156.3	143.5	143.5
82.5°	247.6	127.2	107.6	101.0	101.0
85°	140.1	71.6	61.9	61.9	61.9
87.5°	52.2	25.9	25.9	22.8	22.8
90°	1.3	16.2	27.0	33.9	36.5
92.5°	33.9	28.4	32.5	35.3	36.5
95°	87.9	43.3	52.8	59.7	58.2
97.5°	158.4	47.5	69.0	73.2	74.5
100°	239.8	54.2	77.2	87.9	90.7
102.5°	329.0	326.5	79.9	94.7	98.9
105°	411.7	452.3	82.6	97.4	102.9
107.5°	507.8	541.6	85.4	100.2	105.7
110°	600.0	628.3	237.0	101.6	106.9

TEST NUMBER: P914323

CATALOG NUMBER: DFN2DIP-PN4F0-110D070US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	686.7	710.9	687.9	104.2	108.4
115°	778.6	801.6	835.5	208.6	111.1
117.5°	858.6	885.6	908.7	714.9	360.2
120°	947.9	968.2	992.7	1008.9	826.1
122.5°	1023.7	1045.4	1072.6	1080.6	1082.0
125°	1100.9	1118.6	1144.3	1153.8	1157.8
127.5°	1171.3	1190.3	1210.7	1224.2	1225.5
130°	1237.7	1259.4	1274.2	1289.2	1287.9
132.5°	1305.4	1323.1	1337.9	1350.1	1348.8
135°	1362.3	1384.0	1396.1	1409.8	1407.1
137.5°	1421.8	1438.1	1451.8	1465.3	1461.3
140°	1480.0	1491.0	1505.8	1518.0	1511.2
142.5°	1528.9	1538.4	1555.9	1566.7	1560.0
145°	1580.4	1579.0	1601.9	1611.5	1604.7
147.5°	1624.9	1621.0	1643.9	1650.7	1645.4
150°	1668.3	1658.9	1680.6	1688.6	1681.9
152.5°	1704.9	1694.1	1714.4	1722.5	1713.1
155°	1740.1	1728.0	1744.2	1752.3	1741.5
157.5°	1768.5	1757.8	1770.0	1779.5	1768.5
160°	1793.0	1784.8	1793.0	1801.0	1791.5
162.5°	1814.6	1806.5	1813.2	1822.7	1810.5
165°	1833.5	1825.5	1829.5	1839.0	1829.5
167.5°	1848.5	1840.2	1844.4	1853.9	1841.7
170°	1860.7	1852.5	1855.2	1864.7	1852.5
172.5°	1868.8	1860.7	1863.4	1872.9	1860.7
175°	1875.5	1866.0	1868.8	1878.2	1864.7
177.5°	1878.2	1868.8	1870.2	1879.7	1867.4
180°	1871.4	1871.4	1871.4	1871.4	1871.4

TEST NUMBER: P914323

CATALOG NUMBER: DFN2DIP-PN4F0-110D070US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.18	12.08	12.08	12.99	14.15	7.15	8.04	8.04	8.95	10.12
	3H	12.87	13.67	13.78	14.59	15.78	8.34	9.14	9.25	10.06	11.25
	4H	13.48	14.24	14.41	15.16	16.36	8.79	9.55	9.72	10.48	11.68
	6H	13.91	14.60	14.84	15.54	16.75	9.12	9.82	10.06	10.75	11.96
	8H	14.04	14.70	14.98	15.65	16.86	9.21	9.87	10.16	10.82	12.03
	12H	14.10	14.73	15.05	15.68	16.91	9.26	9.89	10.21	10.83	12.07
4H	2H	11.21	11.96	12.14	12.89	14.09	7.75	8.51	8.68	9.43	10.63
	3H	13.05	13.67	13.99	14.63	15.84	9.11	9.74	10.05	10.69	11.91
	4H	13.74	14.32	14.69	15.27	16.51	9.66	10.23	10.61	11.18	12.42
	6H	14.26	14.76	15.23	15.73	16.97	10.08	10.58	11.05	11.55	12.79
	8H	14.44	14.90	15.41	15.87	17.12	10.21	10.67	11.18	11.64	12.90
	12H	14.54	14.96	15.53	15.94	17.20	10.28	10.70	11.27	11.68	12.94
8H	4H	13.72	14.18	14.68	15.15	16.40	9.95	10.41	10.91	11.38	12.63
	6H	14.29	14.67	15.28	15.68	16.93	10.47	10.85	11.46	11.86	13.11
	8H	14.51	14.84	15.51	15.84	17.11	10.66	11.00	11.66	12.00	13.26
	12H	14.65	14.94	15.65	15.94	17.25	10.78	11.08	11.79	12.07	13.39
12H	4H	13.67	14.08	14.65	15.07	16.33	9.96	10.37	10.94	11.36	12.61
	6H	14.26	14.60	15.26	15.60	16.87	10.52	10.85	11.52	11.85	13.12
	8H	14.49	14.78	15.49	15.78	17.09	10.73	11.03	11.74	12.02	13.34