

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914361

Luminaire Tested: DFN2DIP-PN4F0-120D080US927-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914361
REPORT IS A COMBINATION OF REPORTS P901217 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-120D080US927-FLLONL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15685.2 lumens
Efficiency: N/A
Efficacy: 85.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 184.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914361

CATALOG NUMBER: DFN2DIP-PN4F0-120D080US927-FLLONL

Luminous Intensity Polar Plot

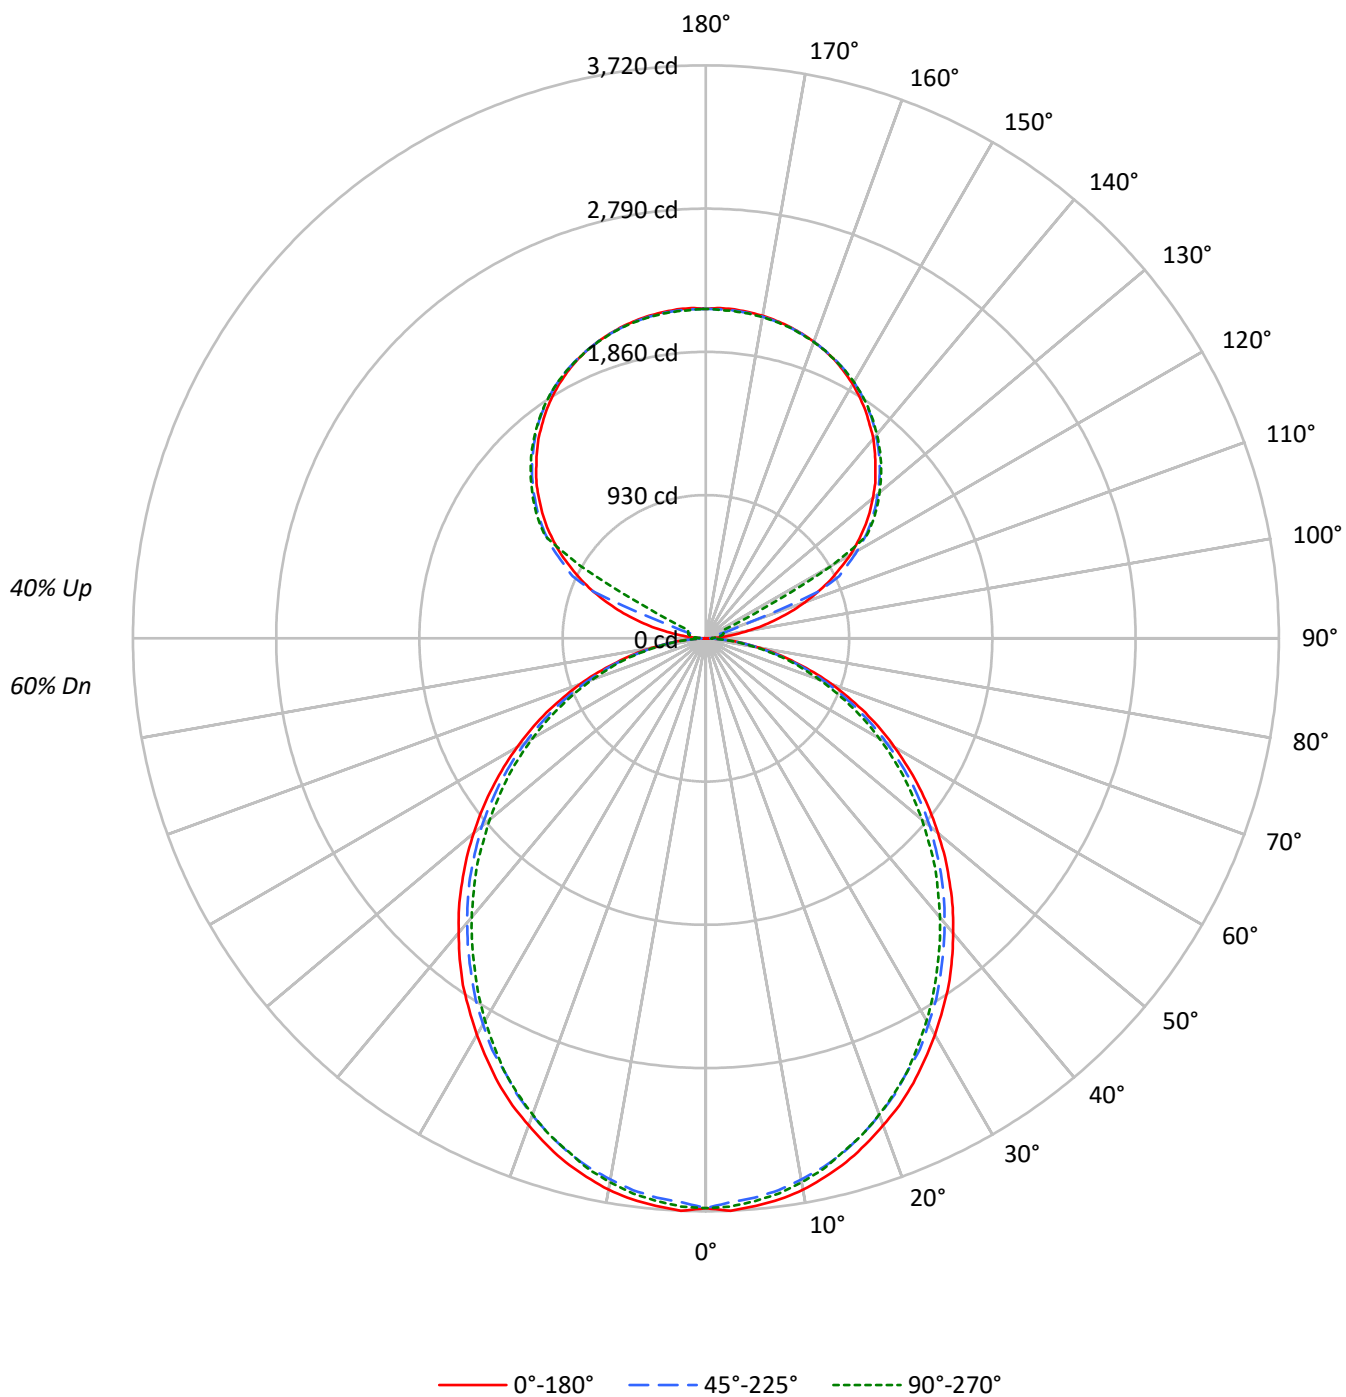

TEST NUMBER: P914361

CATALOG NUMBER: DFN2DIP-PN4F0-120D080US927-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65
1	100	96	92	88	93	90	86	83	78	75	73	67	66	64	58	56	55
2	91	84	77	72	85	78	73	68	68	64	61	59	56	53	51	49	47
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	45	42	40
4	76	65	57	51	71	61	54	48	54	48	44	47	42	39	40	37	34
5	70	58	50	44	65	55	47	42	48	42	38	42	37	34	36	33	30
6	64	52	44	38	60	49	42	36	43	37	33	38	33	30	33	29	26
7	60	47	39	33	56	44	37	32	39	33	29	35	30	26	30	26	23
8	55	43	35	30	52	40	33	28	36	30	26	32	27	23	28	24	21
9	52	39	32	26	48	37	30	25	33	27	23	29	24	21	26	22	19
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	24	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2700	2700	2700
5°	2704	2663	2681
10°	2682	2627	2645
15°	2643	2584	2589
20°	2590	2525	2531
25°	2537	2453	2465
30°	2470	2387	2380
35°	2407	2308	2290
40°	2330	2229	2204
45°	2252	2149	2117
50°	2168	2066	2016
55°	2079	1970	1923
60°	1979	1855	1817
65°	1870	1737	1691
70°	1732	1592	1556
75°	1539	1419	1432
80°	1307	1199	1195
85°	946	819	799

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2252 cd/sqm

TEST NUMBER: P914361

CATALOG NUMBER: DFN2DIP-PN4F0-120D080US927-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	348.1	2.2
10°-20°	979.5	6.2
20°-30°	1439.5	9.2
30°-40°	1671.9	10.7
40°-50°	1669.9	10.6
50°-60°	1456.0	9.3
60°-70°	1076.3	6.9
70°-80°	609.0	3.9
80°-90°	164.5	1.0
90°-100°	70.5	0.4
100°-110°	262.9	1.7
110°-120°	697.3	4.4
120°-130°	1156.5	7.4
130°-140°	1228.4	7.8
140°-150°	1141.7	7.3
150°-160°	917.9	5.9
160°-170°	591.5	3.8
170°-180°	203.6	1.3
0°-30°	2767.2	17.6
0°-40°	4439.1	28.3
0°-60°	7565.0	48.2
0°-90°	9414.9	60.0
90°-120°	1030.7	6.6
90°-150°	4557.3	29.1
90°-180°	6270.0	40.0
0°-180°	15685.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3699	3699	3699	3699	3699	
5°	3699	3685	3646	3674	3667	351
15°	3521	3500	3454	3468	3450	992
25°	3187	3158	3098	3105	3098	1466
35°	2749	2714	2657	2636	2618	1717
45°	2237	2212	2159	2120	2106	1727
55°	1693	1672	1629	1586	1569	1514
65°	1142	1120	1085	1053	1035	1129
75°	597	591	572	551	558	638
85°	146	142	139	128	124	162
90°	2	18	31	39	42	15
95°	100	49	60	68	66	119
105°	470	517	94	111	118	503
115°	890	916	955	238	127	876
125°	1258	1278	1308	1319	1323	1122
135°	1557	1582	1596	1611	1608	1203
145°	1806	1804	1831	1842	1834	1130
155°	1989	1975	1993	2003	1990	916
165°	2096	2086	2091	2102	2091	592
175°	2143	2133	2136	2146	2131	204
180°	2139	2139	2139	2139	2139	

TEST NUMBER: P914361

CATALOG NUMBER: DFN2DIP-PN4F0-120D080US927-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3698.9	3698.9	3698.9	3698.9	3698.9
2.5°	3720.4	3702.7	3663.4	3698.9	3692.1
5°	3698.9	3684.9	3645.7	3674.0	3667.2
7.5°	3674.0	3652.8	3613.6	3642.3	3635.2
10°	3635.2	3610.2	3567.6	3595.9	3585.3
12.5°	3581.5	3560.4	3517.8	3535.5	3528.3
15°	3521.2	3500.0	3453.6	3467.9	3450.2
17.5°	3446.5	3425.3	3378.9	3396.6	3378.9
20°	3364.6	3343.4	3293.7	3304.2	3290.2
22.5°	3283.0	3251.0	3204.5	3204.5	3197.4
25°	3186.8	3158.5	3098.1	3105.0	3098.1
27.5°	3080.0	3055.1	3009.1	2998.5	2980.8
30°	2973.6	2944.9	2891.7	2881.2	2866.8
32.5°	2859.6	2838.5	2781.5	2760.0	2745.7
35°	2749.4	2714.0	2657.0	2635.5	2617.8
37.5°	2624.9	2592.9	2535.9	2511.0	2493.2
40°	2497.0	2468.4	2411.3	2379.6	2365.3
42.5°	2372.5	2343.8	2287.2	2251.4	2230.2
45°	2237.4	2212.5	2158.9	2120.0	2105.7
47.5°	2105.7	2080.7	2023.8	1984.6	1963.4
50°	1966.8	1949.1	1899.3	1849.4	1831.7
52.5°	1831.7	1806.8	1760.8	1721.5	1696.6
55°	1693.2	1671.7	1629.0	1586.4	1568.7
57.5°	1554.3	1536.6	1490.2	1447.6	1433.2
60°	1415.5	1401.5	1351.7	1312.5	1301.9
62.5°	1280.4	1255.4	1220.0	1184.5	1170.2
65°	1141.9	1120.4	1084.9	1052.8	1035.1
67.5°	999.7	981.5	949.8	925.0	910.6
70°	867.9	853.6	821.5	796.6	782.7
72.5°	732.8	718.5	700.8	675.9	665.3
75°	597.4	590.6	572.4	551.4	558.5
77.5°	476.6	462.2	455.1	444.5	434.0
80°	355.8	352.0	344.9	334.4	327.2
82.5°	241.9	241.9	238.5	224.2	224.2
85°	145.7	142.3	138.9	127.9	124.5
87.5°	64.2	57.0	49.8	39.2	35.5
90°	1.5	18.5	30.9	38.7	41.7
92.5°	38.7	32.6	37.2	40.2	41.7
95°	100.5	49.4	60.3	68.2	66.5
97.5°	181.0	54.2	78.8	83.7	85.1
100°	274.0	61.9	88.2	100.5	103.6
102.5°	376.0	373.0	91.3	108.2	113.0
105°	470.5	517.0	94.4	111.4	117.6
107.5°	580.4	618.9	97.6	114.5	120.7
110°	685.7	718.0	270.9	116.1	122.2



TEST NUMBER: P914361

CATALOG NUMBER: DFN2DIP-PN4F0-120D080US927-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	784.7	812.5	786.2	119.1	123.9
115°	889.9	916.2	954.9	238.4	127.0
117.5°	981.2	1012.1	1038.5	817.1	411.7
120°	1083.4	1106.5	1134.5	1153.0	944.0
122.5°	1169.9	1194.8	1225.8	1235.0	1236.7
125°	1258.1	1278.3	1307.7	1318.6	1323.2
127.5°	1338.6	1360.3	1383.7	1399.1	1400.6
130°	1414.5	1439.3	1456.3	1473.4	1471.9
132.5°	1491.9	1512.1	1529.1	1543.0	1541.5
135°	1557.0	1581.7	1595.5	1611.2	1608.0
137.5°	1625.0	1643.5	1659.1	1674.6	1670.0
140°	1691.5	1704.0	1720.9	1734.9	1727.1
142.5°	1747.4	1758.2	1778.2	1790.6	1782.8
145°	1806.2	1804.5	1830.8	1841.7	1833.9
147.5°	1857.1	1852.5	1878.7	1886.5	1880.4
150°	1906.7	1895.8	1920.6	1929.8	1922.1
152.5°	1948.4	1936.1	1959.2	1968.6	1957.8
155°	1988.7	1974.9	1993.4	2002.6	1990.4
157.5°	2021.2	2008.9	2022.8	2033.7	2021.2
160°	2049.1	2039.8	2049.1	2058.3	2047.5
162.5°	2073.8	2064.6	2072.3	2083.1	2069.2
165°	2095.5	2086.3	2090.9	2101.7	2090.9
167.5°	2112.5	2103.2	2107.9	2118.8	2104.8
170°	2126.5	2117.1	2120.3	2131.1	2117.1
172.5°	2135.7	2126.5	2129.6	2140.5	2126.5
175°	2143.4	2132.6	2135.7	2146.5	2131.1
177.5°	2146.5	2135.7	2137.3	2148.2	2134.2
180°	2138.8	2138.8	2138.8	2138.8	2138.8

TEST NUMBER: P914361

CATALOG NUMBER: DFN2DIP-PN4F0-120D080US927-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.61	12.57	12.47	13.45	14.57	11.17	12.13	12.03	13.01	14.13
	3H	13.28	14.14	14.16	15.03	16.18	12.79	13.65	13.67	14.55	15.70
	4H	13.87	14.68	14.77	15.59	16.74	13.38	14.20	14.28	15.10	16.26
	6H	14.28	15.03	15.18	15.94	17.11	13.79	14.54	14.69	15.45	16.62
	8H	14.39	15.10	15.30	16.03	17.20	13.89	14.61	14.81	15.54	16.71
	12H	14.44	15.12	15.36	16.04	17.24	13.94	14.62	14.86	15.54	16.74
4H	2H	12.08	12.89	12.98	13.80	14.95	11.73	12.54	12.63	13.45	14.60
	3H	13.96	14.64	14.87	15.57	16.74	13.56	14.23	14.47	15.17	16.34
	4H	14.68	15.30	15.60	16.23	17.43	14.26	14.88	15.18	15.81	17.01
	6H	15.20	15.74	16.14	16.69	17.89	14.78	15.31	15.71	16.27	17.46
	8H	15.36	15.86	16.29	16.80	18.01	14.93	15.43	15.86	16.37	17.59
	12H	15.43	15.89	16.39	16.85	18.07	15.00	15.45	15.95	16.41	17.63
8H	4H	14.88	15.38	15.82	16.33	17.54	14.51	15.01	15.45	15.96	17.17
	6H	15.52	15.94	16.49	16.93	18.14	15.15	15.56	16.11	16.55	17.76
	8H	15.75	16.11	16.72	17.09	18.32	15.36	15.73	16.33	16.71	17.93
	12H	15.88	16.21	16.86	17.18	18.45	15.48	15.80	16.46	16.78	18.05
12H	4H	14.87	15.32	15.83	16.29	17.51	14.51	14.96	15.47	15.93	17.14
	6H	15.55	15.92	16.53	16.90	18.13	15.19	15.55	16.16	16.53	17.76
	8H	15.80	16.12	16.78	17.10	18.37	15.43	15.75	16.41	16.72	18.00