

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914378

Luminaire Tested: DFN2DIP-PN4F0-120D120US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914378
REPORT IS A COMBINATION OF REPORTS P899770 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-120D120US927-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 16493.2 lumens
Efficiency: N/A
Efficacy: 71.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 229.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914378

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US927-RLLFLL

Luminous Intensity Polar Plot

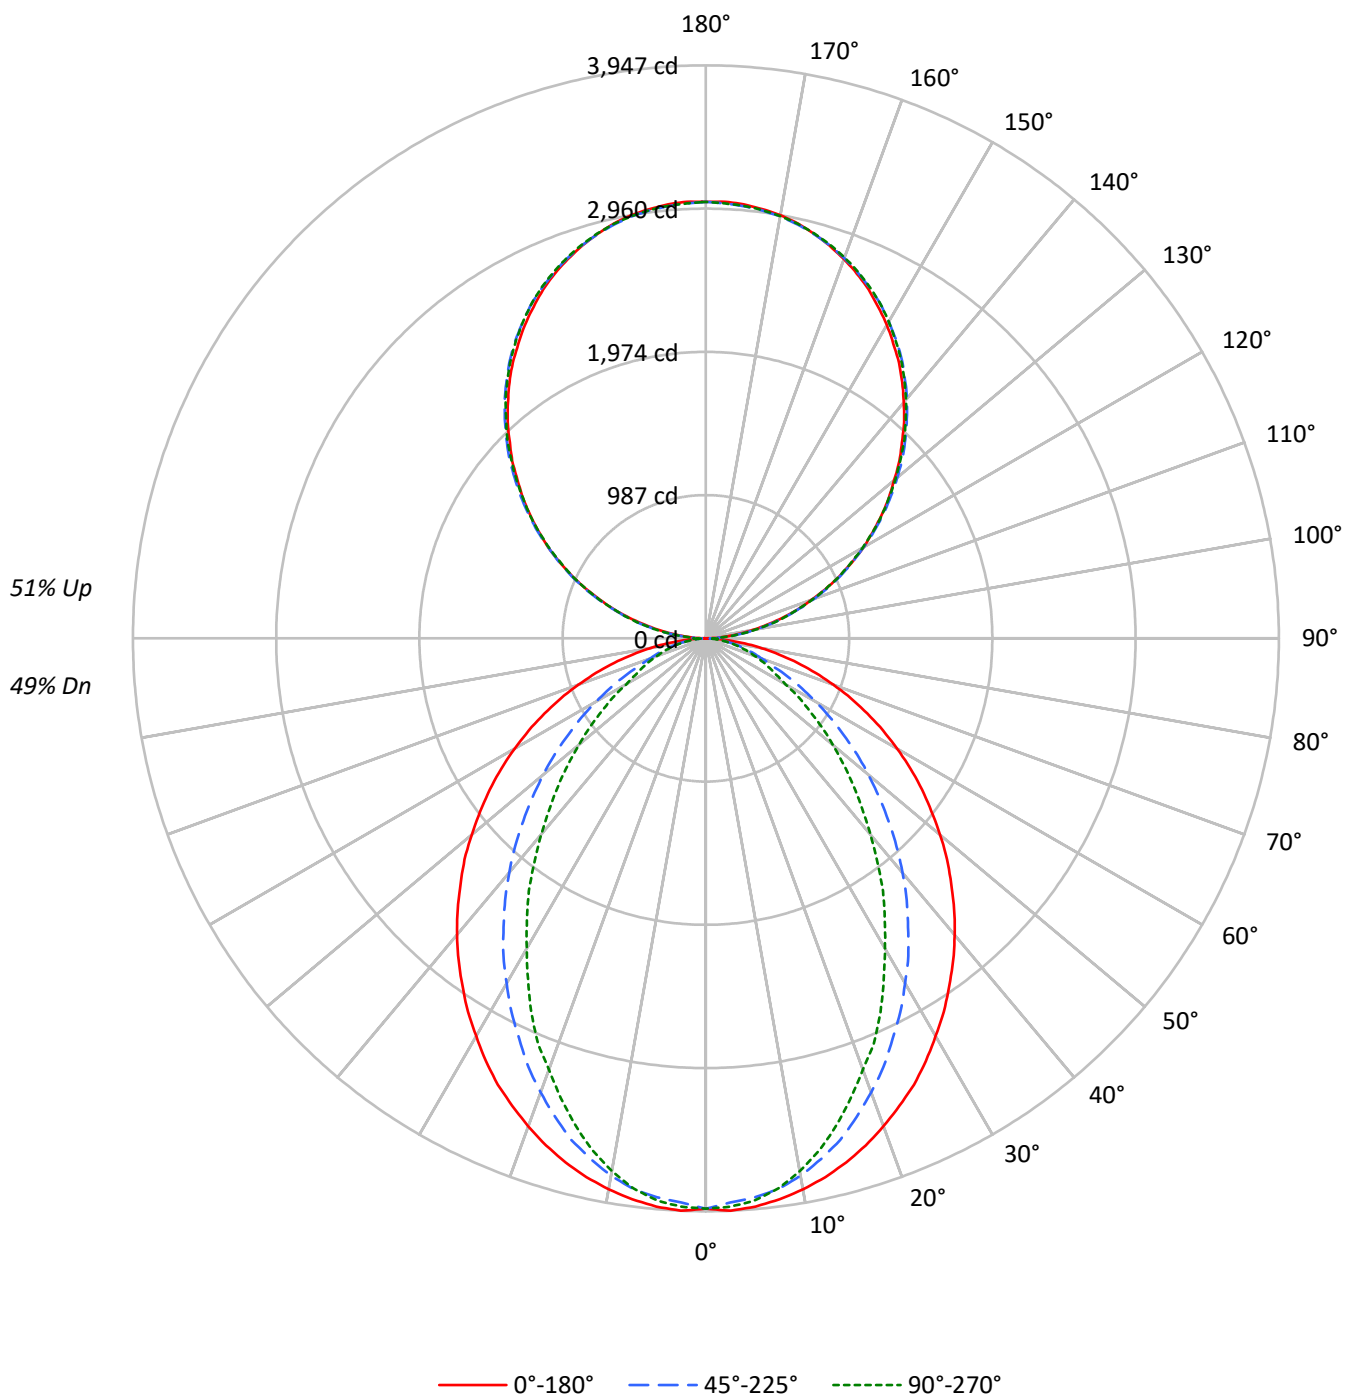

TEST NUMBER: P914378

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US927-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2868	2868	2868
5°	2873	2823	2841
10°	2844	2768	2749
15°	2805	2677	2607
20°	2753	2551	2432
25°	2700	2410	2263
30°	2629	2265	2048
35°	2559	2110	1860
40°	2488	1949	1644
45°	2406	1770	1448
50°	2320	1590	1256
55°	2231	1397	1072
60°	2128	1195	883
65°	2010	990	796
70°	1866	799	721
75°	1685	705	657
80°	1424	593	571
85°	992	398	433

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2406 cd/sqm

TEST NUMBER: P914378

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US927-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	368.2	2.2
10°-20°	1010.8	6.1
20°-30°	1419.2	8.6
30°-40°	1547.0	9.4
40°-50°	1421.9	8.6
50°-60°	1116.7	6.8
60°-70°	726.9	4.4
70°-80°	374.2	2.3
80°-90°	104.1	0.6
90°-100°	186.0	1.1
100°-110°	591.1	3.6
110°-120°	1011.6	6.1
120°-130°	1330.4	8.1
130°-140°	1493.3	9.1
140°-150°	1464.3	8.9
150°-160°	1228.4	7.4
160°-170°	814.6	4.9
170°-180°	284.7	1.7
0°-30°	2798.2	17.0
0°-40°	4345.2	26.3
0°-60°	6883.7	41.7
0°-90°	8088.8	49.0
90°-120°	1788.7	10.8
90°-150°	6076.6	36.8
90°-180°	8404.0	51.0
0°-180°	16493.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3929	3929	3929	3929	3929	
5°	3929	3911	3865	3897	3886	373
15°	3737	3698	3577	3509	3474	1053
25°	3392	3278	3044	2898	2844	1560
35°	2923	2741	2429	2205	2126	1829
45°	2389	2151	1778	1525	1440	1845
55°	1817	1540	1156	942	875	1623
65°	1227	939	619	498	487	1216
75°	654	405	284	260	256	692
85°	153	78	68	68	68	175
90°	3	33	89	83	86	16
95°	132	158	162	162	158	147
105°	546	553	558	563	563	576
115°	1015	1030	1025	1022	1015	1004
125°	1476	1499	1492	1484	1481	1319
135°	1910	1938	1943	1940	1933	1476
145°	2318	2337	2351	2354	2344	1449
155°	2651	2658	2667	2679	2671	1220
165°	2884	2881	2881	2900	2887	814
175°	3001	2994	2988	3006	2991	285
180°	3006	3006	3006	3006	3006	

TEST NUMBER: P914378

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3928.9	3928.9	3928.9	3928.9	3928.9
2.5°	3946.6	3928.9	3889.7	3925.5	3918.3
5°	3928.9	3911.2	3864.7	3896.8	3886.3
7.5°	3896.8	3875.7	3825.9	3839.9	3822.1
10°	3854.2	3829.3	3758.3	3747.4	3726.3
12.5°	3801.0	3769.0	3672.7	3651.6	3612.4
15°	3736.9	3697.7	3576.9	3509.4	3474.0
17.5°	3662.2	3605.2	3455.8	3377.8	3320.8
20°	3576.9	3505.6	3328.0	3239.3	3160.8
22.5°	3484.5	3402.7	3196.3	3075.6	3022.4
25°	3392.1	3278.1	3043.5	2897.9	2844.3
27.5°	3281.9	3160.8	2901.3	2734.2	2652.3
30°	3164.6	3029.2	2744.7	2563.7	2467.5
32.5°	3050.7	2886.9	2595.7	2382.2	2293.2
35°	2922.8	2741.3	2428.6	2204.6	2126.1
37.5°	2798.3	2602.6	2272.1	2026.5	1937.8
40°	2666.6	2453.5	2108.4	1856.0	1763.6
42.5°	2531.6	2304.1	1945.0	1681.7	1593.1
45°	2389.4	2151.0	1777.9	1525.2	1439.9
47.5°	2254.3	2002.0	1618.0	1365.2	1287.1
50°	2105.0	1852.6	1461.4	1215.8	1141.5
52.5°	1959.0	1692.3	1312.0	1077.4	1009.9
55°	1816.8	1539.5	1155.5	942.3	874.8
57.5°	1671.1	1386.7	1017.0	817.8	760.9
60°	1521.8	1237.3	871.0	690.0	633.0
62.5°	1376.2	1091.7	746.6	576.1	547.7
65°	1226.8	938.6	618.7	498.0	487.0
67.5°	1084.6	796.3	498.0	437.2	426.7
70°	935.2	657.9	412.3	376.8	362.5
72.5°	793.0	529.7	344.8	316.5	309.3
75°	654.1	405.1	284.5	259.5	256.1
77.5°	515.7	287.8	224.1	209.8	202.6
80°	387.5	206.4	170.5	156.5	156.5
82.5°	270.1	138.8	117.3	110.1	110.1
85°	152.8	78.1	67.5	67.5	67.5
87.5°	57.0	28.3	28.3	24.9	24.9
90°	2.7	32.6	88.8	83.4	86.1
92.5°	56.2	76.1	78.8	81.6	81.6
95°	132.3	157.7	162.2	162.2	157.7
97.5°	220.2	243.8	253.8	253.8	253.8
100°	321.8	342.6	349.8	349.8	347.1
102.5°	428.7	444.1	454.1	456.9	454.1
105°	545.7	552.9	558.3	562.8	562.8
107.5°	661.6	672.6	672.6	674.3	661.6
110°	774.0	788.5	788.5	788.5	781.3



TEST NUMBER: P914378

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US927-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	895.5	910.9	908.2	900.9	895.5
115°	1015.1	1029.7	1025.1	1022.4	1015.1
117.5°	1133.8	1153.8	1141.1	1133.8	1126.6
120°	1253.5	1273.4	1253.5	1253.5	1245.4
122.5°	1362.3	1387.7	1375.0	1367.7	1362.3
125°	1476.5	1499.1	1491.9	1483.8	1481.0
127.5°	1588.0	1616.0	1606.1	1595.2	1588.0
130°	1692.2	1724.8	1720.3	1714.8	1704.9
132.5°	1809.1	1834.5	1836.3	1823.6	1816.4
135°	1909.7	1937.8	1943.3	1940.5	1933.3
137.5°	2022.1	2044.8	2049.3	2047.5	2036.6
140°	2120.9	2143.6	2156.2	2156.2	2146.3
142.5°	2222.5	2245.1	2252.3	2255.0	2245.1
145°	2318.5	2336.6	2351.1	2353.9	2343.9
147.5°	2404.6	2427.2	2438.2	2442.7	2432.7
150°	2493.5	2508.8	2518.8	2527.0	2518.8
152.5°	2572.3	2587.7	2600.4	2610.4	2600.4
155°	2651.1	2658.4	2666.6	2679.2	2671.1
157.5°	2719.2	2724.5	2729.1	2747.2	2734.5
160°	2779.8	2785.3	2788.0	2803.4	2792.5
162.5°	2836.0	2836.0	2838.8	2856.0	2843.3
165°	2884.1	2881.4	2881.4	2899.5	2886.8
167.5°	2927.6	2919.4	2919.4	2937.6	2924.9
170°	2960.2	2952.9	2950.2	2968.4	2952.9
172.5°	2982.9	2975.6	2972.9	2991.0	2975.6
175°	3001.0	2993.7	2988.3	3006.4	2991.0
177.5°	3011.0	3003.7	2998.2	3013.7	2998.2
180°	3006.4	3006.4	3006.4	3006.4	3006.4

TEST NUMBER: P914378

CATALOG NUMBER: DFN2DIP-PN4F0-120D120US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.72	11.55	11.69	12.53	13.81	6.69	7.51	7.66	8.49	9.78
	3H	12.40	13.14	13.39	14.13	15.44	7.88	8.61	8.86	9.60	10.91
	4H	13.01	13.71	14.01	14.70	16.02	8.33	9.02	9.32	10.02	11.33
	6H	13.44	14.08	14.44	15.08	16.41	8.65	9.29	9.66	10.29	11.62
	8H	13.56	14.17	14.58	15.19	16.51	8.74	9.35	9.75	10.36	11.69
	12H	13.63	14.21	14.64	15.21	16.57	8.78	9.36	9.80	10.37	11.72
4H	2H	10.74	11.44	11.74	12.43	13.75	7.28	7.98	8.29	8.97	10.29
	3H	12.57	13.15	13.58	14.17	15.50	8.63	9.21	9.65	10.24	11.57
	4H	13.27	13.79	14.28	14.81	16.16	9.18	9.71	10.20	10.73	12.08
	6H	13.78	14.24	14.81	15.28	16.63	9.60	10.06	10.63	11.09	12.45
	8H	13.96	14.38	14.99	15.42	16.78	9.73	10.16	10.76	11.19	12.55
	12H	14.06	14.44	15.10	15.49	16.86	9.80	10.18	10.84	11.23	12.60
8H	4H	13.23	13.66	14.26	14.69	16.05	9.46	9.89	10.49	10.92	12.29
	6H	13.80	14.15	14.86	15.23	16.59	9.98	10.33	11.04	11.41	12.77
	8H	14.02	14.33	15.08	15.39	16.77	10.17	10.48	11.24	11.54	12.92
	12H	14.16	14.43	15.23	15.49	16.91	10.29	10.56	11.36	11.62	13.04
12H	4H	13.18	13.57	14.23	14.61	15.98	9.47	9.85	10.52	10.90	12.27
	6H	13.78	14.09	14.84	15.14	16.53	10.03	10.34	11.09	11.40	12.78
	8H	14.00	14.27	15.06	15.32	16.75	10.24	10.51	11.31	11.57	12.99

END OF REPORT