

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916804

Luminaire Tested: DFN2DIP-PN4F0-040D090US930-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916804
REPORT IS A COMBINATION OF REPORTS P899699 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-040D090US930-FLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9722.4 lumens
Efficiency: N/A
Efficacy: 97.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 100
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916804

CATALOG NUMBER: DFN2DIP-PN4F0-040D090US930-FLLFLL

Luminous Intensity Polar Plot

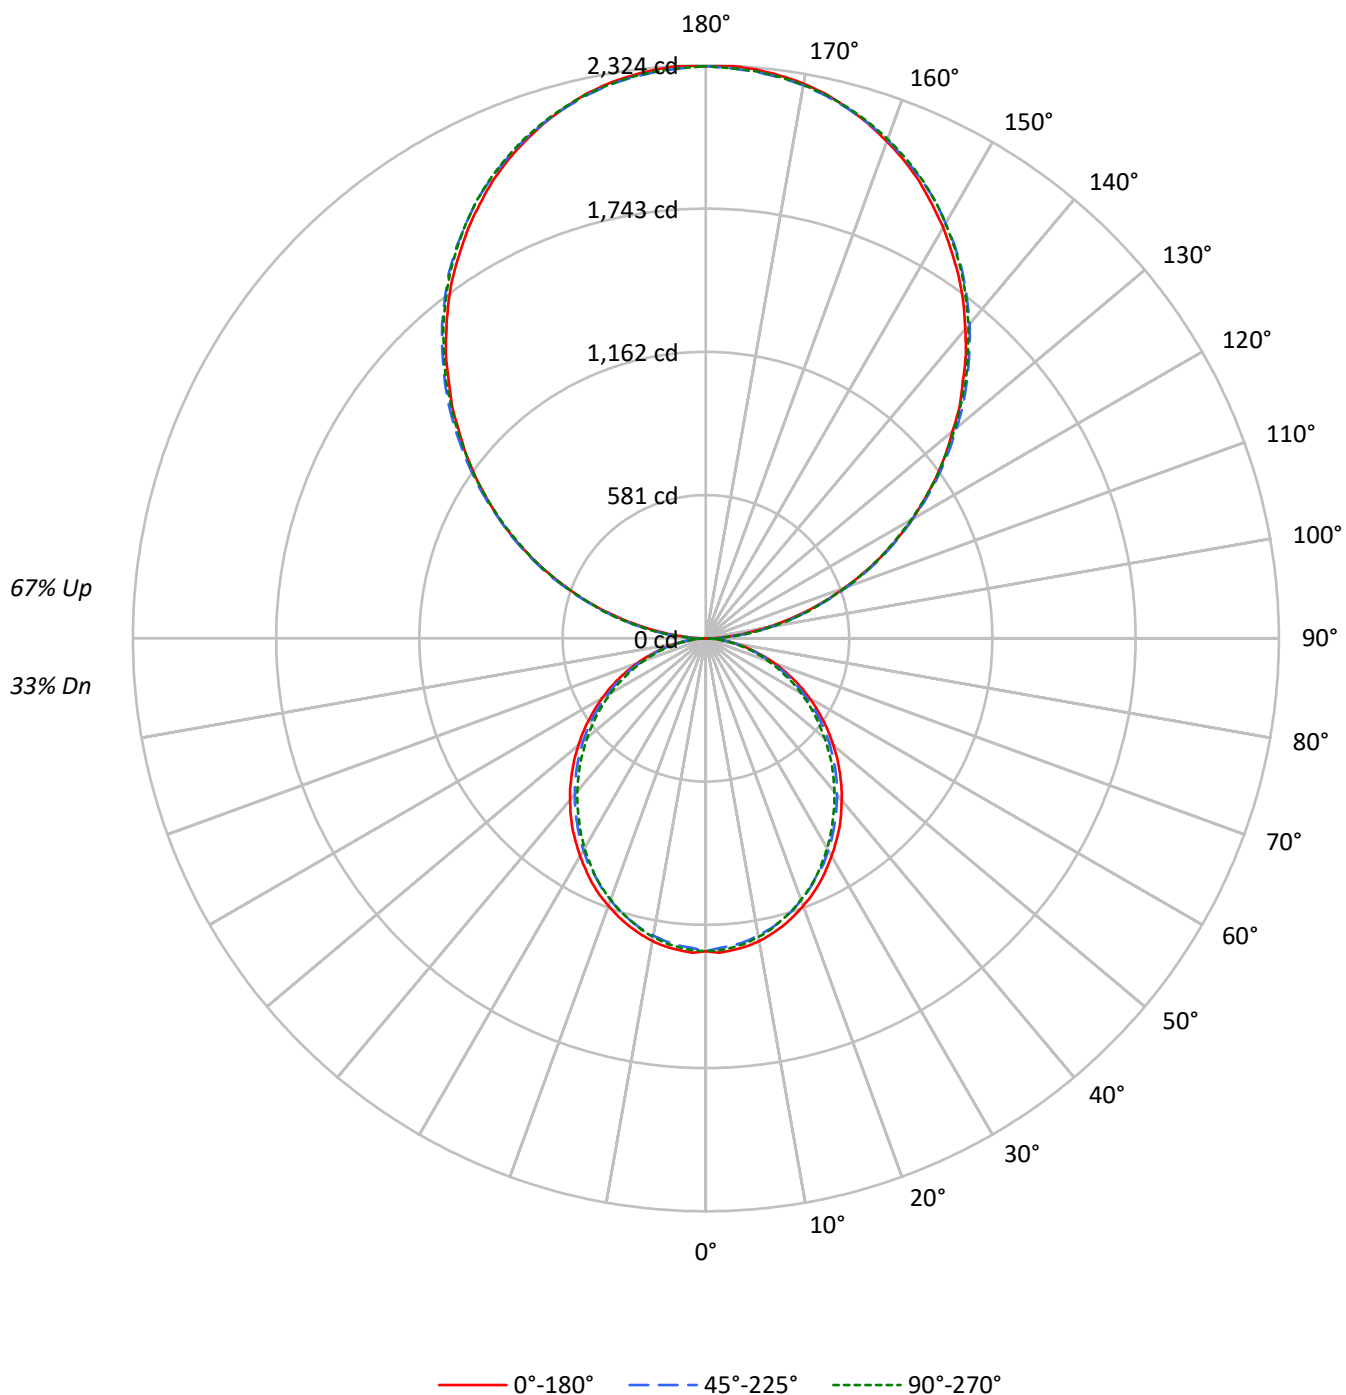

TEST NUMBER: P916804

CATALOG NUMBER: DFN2DIP-PN4F0-040D090US930-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	78	72	67	77	71	66	62	57	53	50	44	41	39	32	30	29
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25
4	71	61	53	47	64	55	49	43	44	40	36	34	31	28	25	23	21
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	20	18
6	60	48	41	35	54	44	37	32	36	31	27	28	24	21	20	18	16
7	56	44	36	30	50	40	33	28	32	27	23	25	22	19	19	16	14
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13
9	48	36	29	24	43	33	26	22	27	22	18	21	18	15	16	13	12
10	45	33	26	21	40	30	24	20	25	20	17	19	16	14	15	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	926	926	926
5°	928	914	920
10°	920	901	907
15°	907	887	888
20°	888	866	868
25°	870	842	845
30°	847	819	816
35°	826	792	786
40°	799	765	756
45°	773	737	726
50°	744	709	692
55°	713	676	660
60°	679	636	623
65°	642	596	580
70°	594	546	534
75°	528	487	491
80°	449	411	410
85°	325	281	274

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1815 cd/sqm

TEST NUMBER: P916804

CATALOG NUMBER: DFN2DIP-PN4F0-040D090US930-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	119.4	1.2
10°-20°	336.0	3.5
20°-30°	493.8	5.1
30°-40°	573.6	5.9
40°-50°	572.9	5.9
50°-60°	499.5	5.1
60°-70°	369.3	3.8
70°-80°	208.9	2.1
80°-90°	61.7	0.6
90°-100°	143.6	1.5
100°-110°	456.3	4.7
110°-120°	780.8	8.0
120°-130°	1026.9	10.6
130°-140°	1152.6	11.9
140°-150°	1130.3	11.6
150°-160°	948.2	9.8
160°-170°	628.8	6.5
170°-180°	219.8	2.3
0°-30°	949.3	9.8
0°-40°	1522.9	15.7
0°-60°	2595.3	26.7
0°-90°	3235.2	33.3
90°-120°	1380.7	14.2
90°-150°	4690.5	48.2
90°-180°	6487.0	66.7
0°-180°	9722.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1269	1269	1269	1269	1269	
5°	1269	1264	1251	1260	1258	120
15°	1208	1201	1185	1190	1184	340
25°	1093	1084	1063	1065	1063	503
35°	943	931	912	904	898	589
45°	768	759	741	727	722	592
55°	581	574	559	544	538	519
65°	392	384	372	361	355	387
75°	205	203	196	189	192	219
85°	50	49	48	44	43	56
90°	2	25	69	64	66	10
95°	102	122	125	125	122	114
105°	421	427	431	434	434	444
115°	784	795	791	789	784	775
125°	1140	1157	1152	1145	1143	1018
135°	1474	1496	1500	1498	1492	1139
145°	1790	1804	1815	1817	1809	1118
155°	2046	2052	2058	2068	2062	942
165°	2226	2224	2224	2238	2228	628
175°	2316	2311	2307	2321	2309	220
180°	2321	2321	2321	2321	2321	

TEST NUMBER: P916804

CATALOG NUMBER: DFN2DIP-PN4F0-040D090US930-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1268.9	1268.9	1268.9	1268.9	1268.9
2.5°	1276.3	1270.2	1256.8	1268.9	1266.6
5°	1268.9	1264.1	1250.7	1260.4	1258.1
7.5°	1260.4	1253.1	1239.7	1249.5	1247.1
10°	1247.1	1238.5	1223.9	1233.6	1230.0
12.5°	1228.7	1221.4	1206.8	1212.9	1210.4
15°	1207.9	1200.7	1184.8	1189.7	1183.6
17.5°	1182.3	1175.1	1159.2	1165.2	1159.2
20°	1154.2	1147.0	1129.9	1133.5	1128.8
22.5°	1126.3	1115.2	1099.3	1099.3	1096.9
25°	1093.2	1083.5	1062.8	1065.2	1062.8
27.5°	1056.6	1048.1	1032.3	1028.7	1022.6
30°	1020.1	1010.3	992.1	988.4	983.5
32.5°	981.0	973.8	954.2	946.9	941.9
35°	943.2	931.1	911.5	904.2	898.1
37.5°	900.5	889.5	869.9	861.4	855.3
40°	856.6	846.8	827.2	816.4	811.5
42.5°	813.9	804.0	784.6	772.3	765.1
45°	767.5	759.0	740.6	727.3	722.4
47.5°	722.4	713.8	694.3	680.9	673.6
50°	674.7	668.6	651.6	634.5	628.4
52.5°	628.4	619.9	604.1	590.6	582.0
55°	580.9	573.5	558.9	544.2	538.2
57.5°	533.2	527.2	511.2	496.6	491.7
60°	485.6	480.8	463.7	450.3	446.6
62.5°	439.3	430.7	418.6	406.3	401.5
65°	391.8	384.3	372.2	361.2	355.1
67.5°	342.9	336.7	325.9	317.3	312.4
70°	297.7	292.9	281.8	273.3	268.5
72.5°	251.4	246.5	240.4	231.9	228.2
75°	205.0	202.6	196.4	189.1	191.6
77.5°	163.5	158.6	156.1	152.5	148.9
80°	122.1	120.7	118.3	114.7	112.3
82.5°	83.0	83.0	81.9	76.9	76.9
85°	50.0	48.8	47.6	43.9	42.7
87.5°	22.0	19.6	17.1	13.5	12.1
90°	2.1	25.2	68.6	64.3	66.4
92.5°	43.4	58.8	60.9	62.9	62.9
95°	102.2	121.7	125.2	125.2	121.7
97.5°	170.0	188.2	195.9	195.9	195.9
100°	248.3	264.5	270.0	270.0	268.0
102.5°	330.9	342.8	350.5	352.6	350.5
105°	421.2	426.7	431.0	434.5	434.5
107.5°	510.7	519.1	519.1	520.5	510.7
110°	597.5	608.7	608.7	608.7	603.1

TEST NUMBER: P916804

CATALOG NUMBER: DFN2DIP-PN4F0-040D090US930-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	691.2	703.1	701.0	695.4	691.2
115°	783.6	794.8	791.2	789.2	783.6
117.5°	875.2	890.6	880.8	875.2	869.6
120°	967.6	982.9	967.6	967.6	961.2
122.5°	1051.5	1071.1	1061.4	1055.7	1051.5
125°	1139.7	1157.2	1151.6	1145.2	1143.2
127.5°	1225.7	1247.4	1239.7	1231.3	1225.7
130°	1306.2	1331.4	1327.9	1323.6	1316.0
132.5°	1396.4	1416.0	1417.4	1407.6	1402.1
135°	1474.1	1495.7	1500.0	1497.9	1492.3
137.5°	1560.8	1578.3	1581.8	1580.5	1572.1
140°	1637.1	1654.6	1664.3	1664.3	1656.7
142.5°	1715.5	1732.9	1738.5	1740.7	1732.9
145°	1789.7	1803.6	1814.8	1816.9	1809.2
147.5°	1856.1	1873.6	1882.0	1885.5	1877.8
150°	1924.7	1936.6	1944.2	1950.5	1944.2
152.5°	1985.5	1997.4	2007.2	2014.9	2007.2
155°	2046.4	2051.9	2058.3	2068.1	2061.8
157.5°	2098.8	2103.1	2106.6	2120.5	2110.7
160°	2145.7	2149.9	2152.1	2163.9	2155.5
162.5°	2189.1	2189.1	2191.2	2204.5	2194.7
165°	2226.2	2224.1	2224.1	2238.1	2228.3
167.5°	2259.8	2253.5	2253.5	2267.4	2257.6
170°	2285.0	2279.3	2277.3	2291.2	2279.3
172.5°	2302.4	2296.9	2294.7	2308.8	2296.9
175°	2316.4	2310.8	2306.6	2320.7	2308.8
177.5°	2324.1	2318.5	2314.3	2326.2	2314.3
180°	2320.7	2320.7	2320.7	2320.7	2320.7

TEST NUMBER: P916804

CATALOG NUMBER: DFN2DIP-PN4F0-040D090US930-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.22	5.95	6.31	7.04	8.53	4.78	5.51	5.87	6.60	8.09
	3H	6.88	7.53	7.98	8.63	10.14	6.39	7.05	7.49	8.14	9.65
	4H	7.46	8.08	8.57	9.18	10.69	6.97	7.59	8.08	8.69	10.21
	6H	7.86	8.43	8.97	9.53	11.05	7.36	7.93	8.48	9.03	10.56
	8H	7.96	8.50	9.08	9.62	11.14	7.47	8.01	8.59	9.12	10.64
	12H	8.00	8.52	9.13	9.63	11.17	7.50	8.02	8.63	9.13	10.67
4H	2H	5.67	6.29	6.79	7.39	8.90	5.32	5.94	6.43	7.04	8.55
	3H	7.53	8.04	8.65	9.17	10.70	7.12	7.64	8.25	8.77	10.29
	4H	8.24	8.71	9.36	9.83	11.37	7.82	8.30	8.95	9.41	10.96
	6H	8.75	9.16	9.88	10.29	11.83	8.32	8.73	9.46	9.87	11.41
	8H	8.90	9.28	10.03	10.40	11.96	8.47	8.85	9.60	9.98	11.53
	12H	8.96	9.31	10.11	10.45	12.01	8.52	8.87	9.67	10.01	11.57
8H	4H	8.42	8.80	9.56	9.93	11.49	8.05	8.43	9.18	9.56	11.12
	6H	9.05	9.37	10.21	10.54	12.09	8.68	8.99	9.83	10.16	11.71
	8H	9.27	9.55	10.43	10.70	12.27	8.89	9.16	10.05	10.31	11.89
	12H	9.40	9.64	10.56	10.79	12.40	9.00	9.24	10.16	10.39	12.00
12H	4H	8.40	8.75	9.55	9.89	11.45	8.04	8.39	9.19	9.53	11.09
	6H	9.08	9.36	10.24	10.51	12.08	8.72	8.99	9.88	10.14	11.71
	8H	9.32	9.56	10.48	10.71	12.32	8.95	9.19	10.11	10.34	11.94

END OF REPORT