

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916837

Luminaire Tested: DFN2DIP-PN4F0-050D080US930-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916837
REPORT IS A COMBINATION OF REPORTS P901203 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-050D080US930-FLLONL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10492.9 lumens
Efficiency: N/A
Efficacy: 102.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 102
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916837

CATALOG NUMBER: DFN2DIP-PN4F0-050D080US930-FLLONL

Luminous Intensity Polar Plot

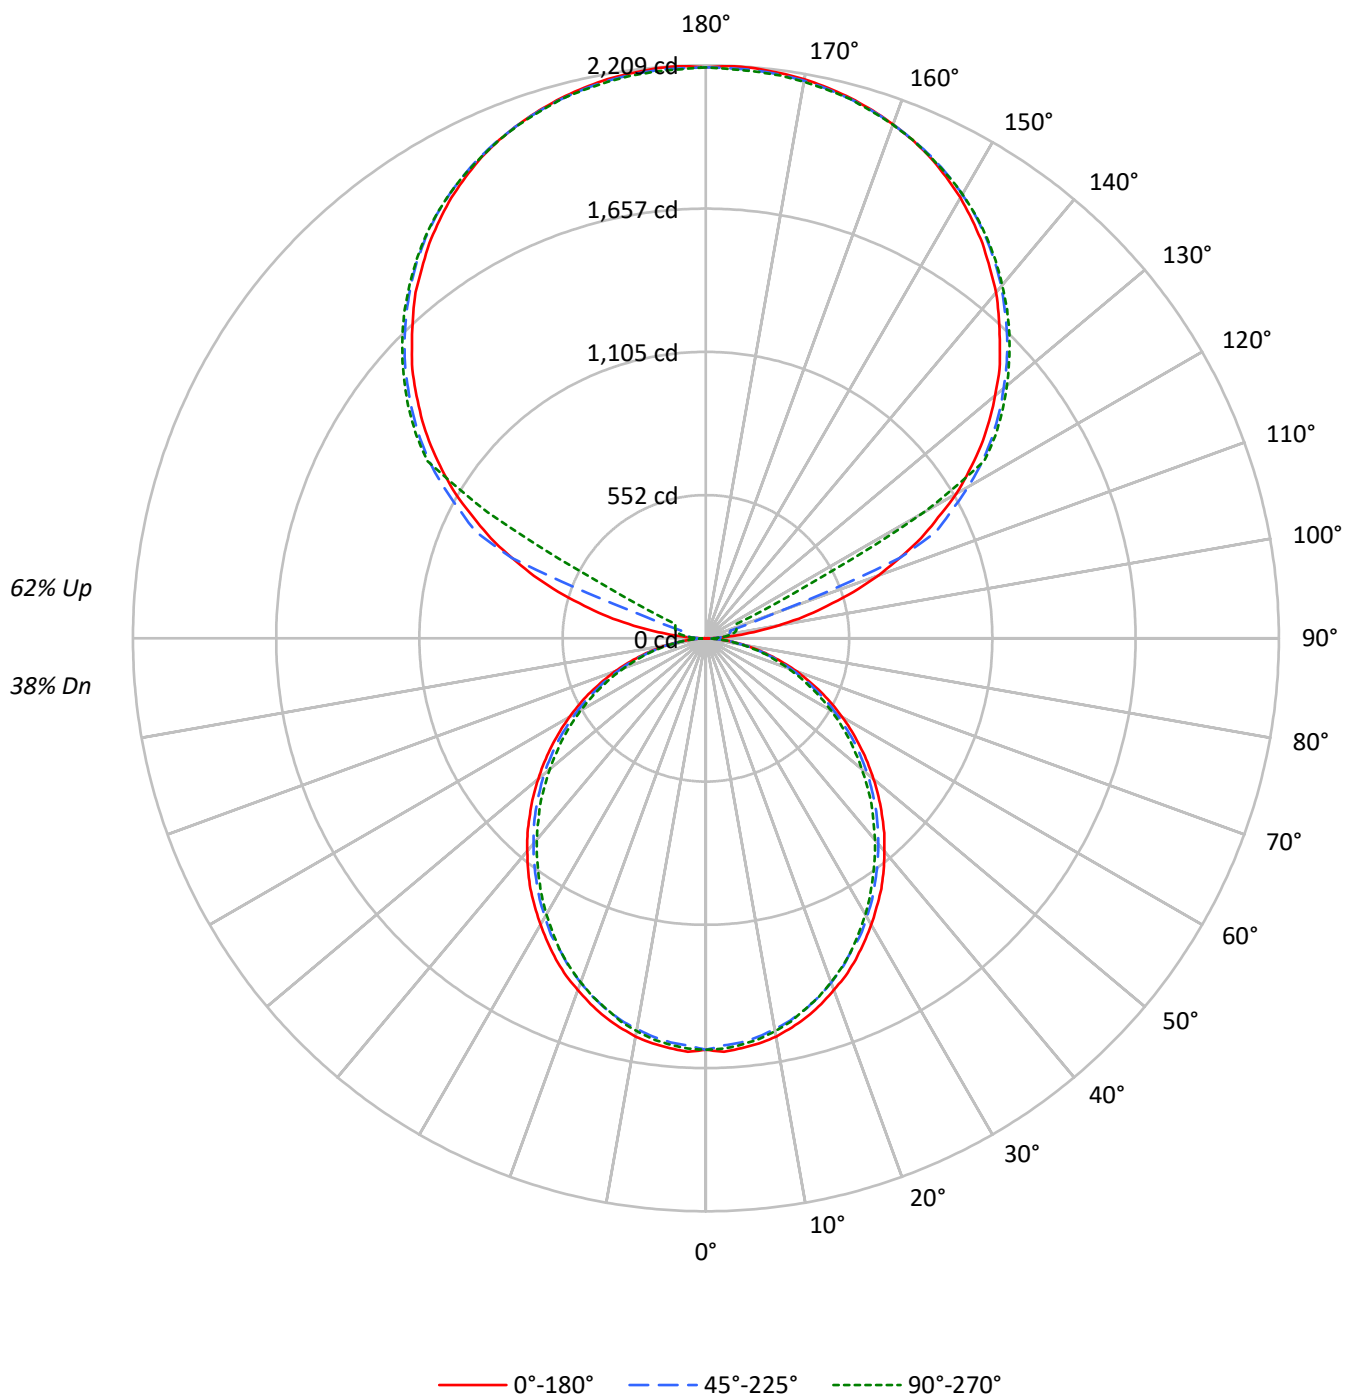

TEST NUMBER: P916837

CATALOG NUMBER: DFN2DIP-PN4F0-050D080US930-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46
1	95	91	87	84	86	83	80	77	67	65	63	53	52	50	40	39	38
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32
3	79	70	63	57	71	64	57	52	52	48	44	41	38	36	31	29	28
4	72	62	54	48	65	56	50	44	46	41	37	37	33	30	28	26	24
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21
6	61	49	41	36	55	45	38	33	37	32	28	30	26	23	23	20	18
7	56	44	36	31	51	41	34	29	34	28	25	27	23	20	21	18	16
8	52	40	33	27	47	37	30	25	31	25	22	25	21	18	19	16	14
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13
10	45	33	26	22	41	31	25	20	26	21	17	21	17	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1158	1158	1158
5°	1160	1142	1150
10°	1150	1127	1134
15°	1133	1108	1110
20°	1111	1083	1086
25°	1088	1052	1057
30°	1059	1023	1021
35°	1032	990	982
40°	999	956	945
45°	966	922	908
50°	930	886	865
55°	892	845	825
60°	849	796	779
65°	802	745	725
70°	743	683	667
75°	660	609	614
80°	561	514	512
85°	406	351	343

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1175 cd/sqm

TEST NUMBER: P916837

CATALOG NUMBER: DFN2DIP-PN4F0-050D080US930-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.3	1.4
10°-20°	420.0	4.0
20°-30°	617.3	5.9
30°-40°	717.0	6.8
40°-50°	716.1	6.8
50°-60°	624.4	6.0
60°-70°	461.6	4.4
70°-80°	261.1	2.5
80°-90°	72.8	0.7
90°-100°	72.6	0.7
100°-110°	270.6	2.6
110°-120°	717.6	6.8
120°-130°	1190.2	11.3
130°-140°	1264.3	12.0
140°-150°	1175.0	11.2
150°-160°	944.7	9.0
160°-170°	608.7	5.8
170°-180°	209.5	2.0
0°-30°	1186.6	11.3
0°-40°	1903.6	18.1
0°-60°	3244.1	30.9
0°-90°	4039.6	38.5
90°-120°	1060.8	10.1
90°-150°	4690.4	44.7
90°-180°	6453.0	61.5
0°-180°	10492.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1586	1586	1586	1586	1586	
5°	1586	1580	1563	1576	1573	151
15°	1510	1501	1481	1487	1480	425
25°	1367	1354	1328	1332	1328	629
35°	1179	1164	1139	1130	1123	736
45°	959	949	926	909	903	740
55°	726	717	698	680	673	649
65°	490	480	465	452	444	484
75°	256	253	246	236	240	273
85°	62	61	60	55	53	70
90°	2	19	32	40	43	10
95°	104	51	62	70	68	123
105°	484	532	97	115	121	517
115°	916	943	983	245	131	902
125°	1295	1316	1346	1357	1362	1155
135°	1602	1628	1642	1658	1655	1238
145°	1859	1857	1884	1895	1887	1163
155°	2047	2032	2052	2061	2048	943
165°	2157	2147	2152	2163	2152	609
175°	2206	2195	2198	2209	2193	210
180°	2201	2201	2201	2201	2201	

TEST NUMBER: P916837

CATALOG NUMBER: DFN2DIP-PN4F0-050D080US930-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1586.2	1586.2	1586.2	1586.2	1586.2
2.5°	1595.4	1587.8	1571.0	1586.2	1583.3
5°	1586.2	1580.2	1563.3	1575.5	1572.6
7.5°	1575.5	1566.4	1549.6	1561.9	1558.9
10°	1558.9	1548.2	1529.9	1542.0	1537.5
12.5°	1535.9	1526.8	1508.5	1516.1	1513.0
15°	1509.9	1500.9	1481.0	1487.2	1479.5
17.5°	1477.9	1468.8	1448.9	1456.5	1448.9
20°	1442.8	1433.8	1412.4	1416.9	1411.0
22.5°	1407.9	1394.1	1374.2	1374.2	1371.1
25°	1366.6	1354.5	1328.5	1331.5	1328.5
27.5°	1320.8	1310.1	1290.4	1285.8	1278.2
30°	1275.1	1262.9	1240.1	1235.5	1229.4
32.5°	1226.3	1217.2	1192.8	1183.6	1177.5
35°	1179.0	1163.8	1139.4	1130.2	1122.6
37.5°	1125.6	1111.9	1087.4	1076.8	1069.2
40°	1070.8	1058.5	1034.0	1020.4	1014.3
42.5°	1017.4	1005.1	980.8	965.4	956.3
45°	959.4	948.8	925.8	909.1	902.9
47.5°	902.9	892.3	867.9	851.0	842.0
50°	843.4	835.8	814.5	793.1	785.5
52.5°	785.5	774.8	755.0	738.3	727.6
55°	726.1	716.9	698.5	680.3	672.7
57.5°	666.5	658.9	639.0	620.8	614.6
60°	607.0	601.0	579.7	562.8	558.3
62.5°	549.1	538.4	523.2	507.9	501.8
65°	489.7	480.5	465.2	451.5	443.8
67.5°	428.7	420.9	407.3	396.6	390.4
70°	372.2	366.1	352.3	341.6	335.7
72.5°	314.3	308.1	300.5	289.8	285.3
75°	256.2	253.2	245.5	236.4	239.5
77.5°	204.4	198.2	195.2	190.6	186.1
80°	152.6	151.0	147.9	143.4	140.3
82.5°	103.7	103.7	102.2	96.1	96.1
85°	62.5	61.0	59.5	54.9	53.4
87.5°	27.5	24.5	21.4	16.8	15.2
90°	1.5	19.1	31.8	39.9	43.0
92.5°	39.9	33.5	38.2	41.4	43.0
95°	103.5	50.9	62.0	70.2	68.5
97.5°	186.3	55.8	81.1	86.1	87.6
100°	282.0	63.8	90.8	103.5	106.6
102.5°	387.0	383.9	94.0	111.4	116.3
105°	484.2	532.1	97.2	114.6	121.1
107.5°	597.3	637.0	100.4	117.8	124.3
110°	705.7	739.0	278.8	119.5	125.8

TEST NUMBER: P916837

CATALOG NUMBER: DFN2DIP-PN4F0-050D080US930-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	807.6	836.2	809.2	122.5	127.5
115°	915.8	942.9	982.8	245.3	130.7
117.5°	1009.8	1041.6	1068.9	840.9	423.7
120°	1115.0	1138.8	1167.6	1186.7	971.6
122.5°	1204.0	1229.6	1261.6	1271.0	1272.8
125°	1294.9	1315.6	1345.9	1357.1	1361.8
127.5°	1377.7	1400.0	1424.1	1439.9	1441.4
130°	1455.8	1481.3	1498.8	1516.4	1514.8
132.5°	1535.5	1556.2	1573.7	1588.0	1586.5
135°	1602.4	1627.9	1642.1	1658.2	1655.0
137.5°	1672.4	1691.5	1707.6	1723.5	1718.7
140°	1740.8	1753.7	1771.2	1785.5	1777.5
142.5°	1798.4	1809.5	1830.1	1842.8	1834.8
145°	1858.9	1857.2	1884.2	1895.4	1887.4
147.5°	1911.3	1906.6	1933.6	1941.6	1935.3
150°	1962.3	1951.2	1976.7	1986.1	1978.2
152.5°	2005.3	1992.6	2016.4	2026.1	2014.9
155°	2046.7	2032.5	2051.6	2061.1	2048.4
157.5°	2080.2	2067.5	2081.9	2093.0	2080.2
160°	2108.9	2099.3	2108.9	2118.4	2107.2
162.5°	2134.3	2124.8	2132.7	2143.9	2129.6
165°	2156.6	2147.2	2151.9	2163.0	2151.9
167.5°	2174.2	2164.5	2169.4	2180.6	2166.2
170°	2188.6	2178.9	2182.1	2193.3	2178.9
172.5°	2198.0	2188.6	2191.8	2202.9	2188.6
175°	2206.0	2194.8	2198.0	2209.1	2193.3
177.5°	2209.1	2198.0	2199.7	2210.8	2196.5
180°	2201.2	2201.2	2201.2	2201.2	2201.2

TEST NUMBER: P916837

CATALOG NUMBER: DFN2DIP-PN4F0-050D080US930-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.62	7.39	7.67	8.44	9.87	6.18	6.95	7.23	8.00	9.43
	3H	8.28	8.96	9.34	10.03	11.47	7.79	8.48	8.85	9.54	10.99
	4H	8.86	9.51	9.93	10.58	12.03	8.38	9.03	9.45	10.09	11.54
	6H	9.26	9.86	10.34	10.93	12.39	8.77	9.37	9.85	10.44	11.90
	8H	9.36	9.93	10.45	11.02	12.48	8.87	9.44	9.96	10.53	11.98
	12H	9.41	9.95	10.50	11.03	12.51	8.91	9.45	10.00	10.53	12.01
4H	2H	7.07	7.72	8.15	8.79	10.24	6.72	7.37	7.80	8.44	9.89
	3H	8.93	9.48	10.02	10.57	12.03	8.53	9.07	9.61	10.17	11.63
	4H	9.64	10.14	10.73	11.23	12.71	9.23	9.73	10.32	10.81	12.29
	6H	10.16	10.59	11.26	11.69	13.17	9.73	10.16	10.83	11.27	12.75
	8H	10.31	10.71	11.40	11.80	13.30	9.88	10.28	10.98	11.38	12.87
	12H	10.38	10.74	11.49	11.85	13.35	9.94	10.30	11.05	11.41	12.91
8H	4H	9.83	10.23	10.93	11.33	12.83	9.46	9.86	10.56	10.96	12.46
	6H	10.46	10.79	11.59	11.93	13.43	10.09	10.42	11.21	11.56	13.05
	8H	10.69	10.98	11.81	12.10	13.61	10.30	10.59	11.43	11.71	13.22
	12H	10.81	11.07	11.95	12.19	13.74	10.41	10.67	11.54	11.79	13.33
12H	4H	9.81	10.18	10.93	11.29	12.79	9.45	9.81	10.57	10.93	12.43
	6H	10.49	10.78	11.62	11.90	13.42	10.13	10.42	11.26	11.54	13.05
	8H	10.73	10.99	11.86	12.11	13.65	10.36	10.62	11.49	11.73	13.28

END OF REPORT