

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916856

Luminaire Tested: DFN2DIP-PN4F0-060D040US930-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916856
REPORT IS A COMBINATION OF REPORTS P899613 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-060D040US930-FLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7729.0 lumens
Efficiency: N/A
Efficacy: 91.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 84.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916856

CATALOG NUMBER: DFN2DIP-PN4F0-060D040US930-FLLFLL

Luminous Intensity Polar Plot

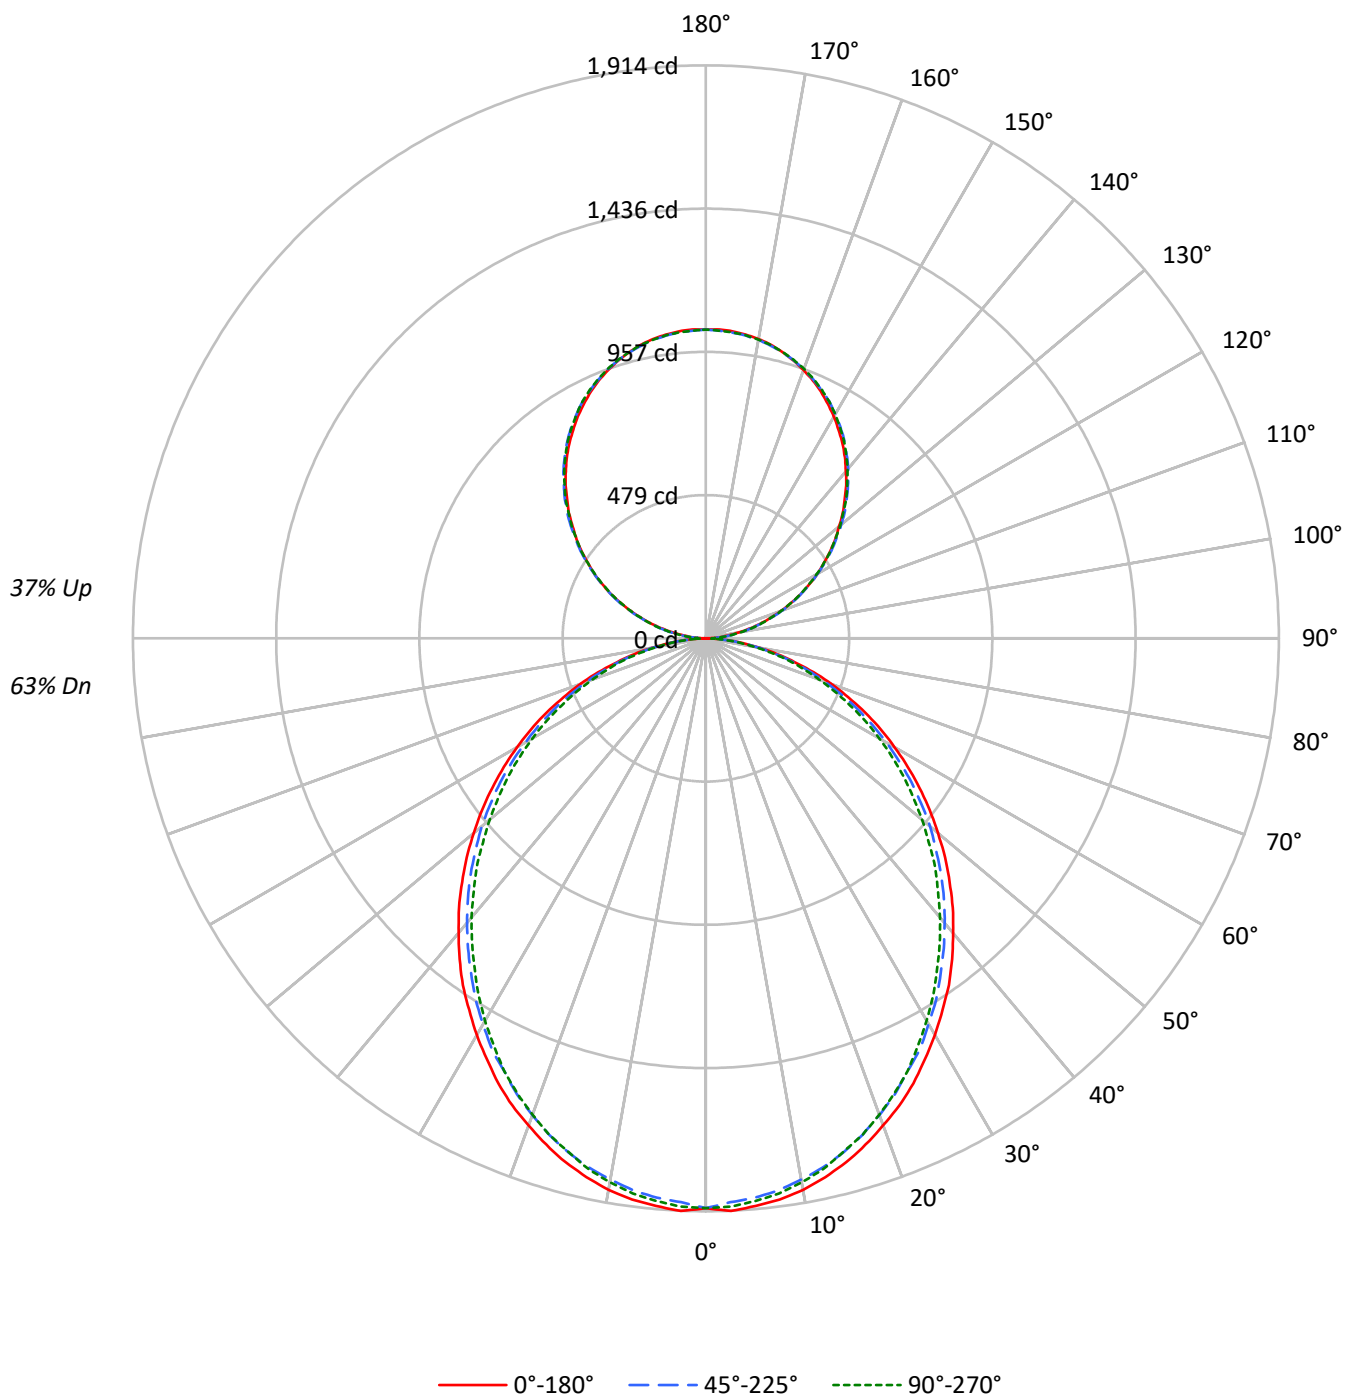

TEST NUMBER: P916856

CATALOG NUMBER: DFN2DIP-PN4F0-060D040US930-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	110	110	110	110	103	103	103	103	90	90	90		79	79	79		68
1	101	96	92	89	94	90	87	84	79	77	74		69	67	66		60
2	92	84	78	72	86	79	73	69	70	65	62		61	58	55		53
3	84	74	66	60	78	70	63	58	61	56	52		54	50	46		47
4	77	66	57	51	71	62	54	49	55	49	44		48	43	40		42
5	70	58	50	44	66	55	48	42	49	43	38		43	38	35		38
6	65	53	44	38	61	50	42	37	44	38	33		39	34	30		34
7	60	48	39	34	56	45	38	32	40	34	30		36	31	27		31
8	56	43	35	30	52	41	34	29	37	31	26		33	28	24		29
9	52	40	32	27	49	38	30	26	34	28	24		30	25	22		27
10	49	36	29	24	46	35	28	23	31	25	21		28	23	20		25

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1389	1389	1389
5°	1392	1370	1380
10°	1380	1352	1361
15°	1360	1330	1332
20°	1333	1299	1303
25°	1305	1262	1268
30°	1271	1228	1225
35°	1239	1188	1178
40°	1199	1147	1134
45°	1159	1106	1089
50°	1116	1063	1037
55°	1070	1014	990
60°	1019	955	935
65°	962	894	870
70°	891	819	801
75°	792	730	737
80°	673	617	615
85°	486	421	411

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1159 cd/sqm

TEST NUMBER: P916856

CATALOG NUMBER: DFN2DIP-PN4F0-060D040US930-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	179.1	2.3
10°-20°	504.1	6.5
20°-30°	740.8	9.6
30°-40°	860.4	11.1
40°-50°	859.3	11.1
50°-60°	749.3	9.7
60°-70°	553.9	7.2
70°-80°	313.4	4.1
80°-90°	85.6	1.1
90°-100°	63.8	0.8
100°-110°	202.8	2.6
110°-120°	347.0	4.5
120°-130°	456.4	5.9
130°-140°	512.3	6.6
140°-150°	502.4	6.5
150°-160°	421.4	5.5
160°-170°	279.5	3.6
170°-180°	97.7	1.3
0°-30°	1424.0	18.4
0°-40°	2284.3	29.6
0°-60°	3892.9	50.4
0°-90°	4845.8	62.7
90°-120°	613.6	7.9
90°-150°	2084.7	27.0
90°-180°	2883.0	37.3
0°-180°	7729.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1903	1903	1903	1903	1903	
5°	1903	1896	1876	1891	1887	181
15°	1812	1801	1777	1785	1776	510
25°	1640	1625	1594	1598	1594	755
35°	1415	1397	1367	1356	1347	884
45°	1151	1138	1111	1091	1084	889
55°	871	860	838	816	807	779
65°	588	577	558	542	533	581
75°	307	304	295	284	287	328
85°	75	73	71	66	64	84
90°	1	11	30	29	30	7
95°	45	54	56	56	54	51
105°	187	190	192	193	193	198
115°	348	353	352	351	348	344
125°	506	514	512	509	508	453
135°	655	665	667	666	663	506
145°	795	802	807	808	804	497
155°	910	912	915	919	916	419
165°	989	988	988	995	990	279
175°	1030	1027	1025	1031	1026	98
180°	1031	1031	1031	1031	1031	

TEST NUMBER: P916856

CATALOG NUMBER: DFN2DIP-PN4F0-060D040US930-FLLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1903.4	1903.4	1903.4	1903.4	1903.4
2.5°	1914.5	1905.4	1885.1	1903.4	1899.9
5°	1903.4	1896.2	1876.0	1890.6	1887.1
7.5°	1890.6	1879.8	1859.5	1874.3	1870.6
10°	1870.6	1857.8	1835.8	1850.4	1844.9
12.5°	1843.1	1832.1	1810.2	1819.3	1815.7
15°	1811.9	1801.1	1777.2	1784.6	1775.5
17.5°	1773.5	1762.7	1738.8	1747.8	1738.8
20°	1731.4	1720.5	1694.8	1700.3	1693.1
22.5°	1689.5	1672.9	1649.0	1649.0	1645.4
25°	1639.9	1625.4	1594.2	1597.7	1594.2
27.5°	1584.9	1572.1	1548.4	1543.0	1533.9
30°	1530.2	1515.4	1488.1	1482.6	1475.2
32.5°	1471.5	1460.7	1431.3	1420.2	1412.9
35°	1414.9	1396.6	1367.3	1356.2	1347.0
37.5°	1350.8	1334.2	1305.0	1292.1	1283.0
40°	1284.9	1270.2	1240.9	1224.6	1217.2
42.5°	1220.8	1206.1	1177.0	1158.5	1147.6
45°	1151.4	1138.5	1110.9	1091.0	1083.5
47.5°	1083.5	1070.7	1041.5	1021.2	1010.3
50°	1012.1	1003.0	977.4	951.7	942.6
52.5°	942.6	929.8	906.0	885.9	873.1
55°	871.3	860.2	838.3	816.4	807.2
57.5°	799.9	790.8	766.9	744.9	737.5
60°	728.4	721.2	695.6	675.4	669.9
62.5°	658.8	646.0	627.8	609.5	602.2
65°	587.6	576.6	558.3	541.8	532.6
67.5°	514.4	505.1	488.8	476.0	468.6
70°	446.6	439.3	422.7	409.9	402.8
72.5°	377.1	369.7	360.6	347.8	342.3
75°	307.4	303.9	294.6	283.7	287.4
77.5°	245.2	237.9	234.2	228.8	223.3
80°	183.1	181.2	177.5	172.0	168.4
82.5°	124.5	124.5	122.7	115.4	115.4
85°	74.9	73.2	71.4	65.8	64.1
87.5°	33.0	29.4	25.6	20.2	18.3
90°	0.9	11.2	30.5	28.6	29.5
92.5°	19.2	26.1	27.1	28.0	28.0
95°	45.4	54.1	55.7	55.7	54.1
97.5°	75.6	83.6	87.1	87.1	87.1
100°	110.4	117.6	120.0	120.0	119.1
102.5°	147.1	152.4	155.8	156.7	155.8
105°	187.2	189.6	191.5	193.1	193.1
107.5°	227.0	230.7	230.7	231.3	227.0
110°	265.5	270.5	270.5	270.5	268.1



TEST NUMBER: P916856

CATALOG NUMBER: DFN2DIP-PN4F0-060D040US930-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	307.2	312.5	311.5	309.1	307.2
115°	348.2	353.3	351.6	350.7	348.2
117.5°	389.0	395.8	391.5	389.0	386.5
120°	430.1	436.8	430.1	430.1	427.2
122.5°	467.3	476.1	471.7	469.2	467.3
125°	506.5	514.3	511.8	509.0	508.1
127.5°	544.8	554.4	551.0	547.2	544.8
130°	580.5	591.7	590.2	588.3	584.9
132.5°	620.6	629.3	630.0	625.6	623.1
135°	655.2	664.8	666.7	665.7	663.2
137.5°	693.7	701.5	703.0	702.4	698.7
140°	727.6	735.4	739.7	739.7	736.3
142.5°	762.5	770.2	772.7	773.6	770.2
145°	795.4	801.6	806.6	807.6	804.1
147.5°	824.9	832.7	836.4	838.0	834.5
150°	855.4	860.7	864.1	866.9	864.1
152.5°	882.5	887.7	892.1	895.5	892.1
155°	909.5	912.0	914.8	919.2	916.3
157.5°	932.9	934.7	936.2	942.5	938.1
160°	953.7	955.5	956.4	961.7	958.0
162.5°	972.9	972.9	973.9	979.7	975.4
165°	989.4	988.5	988.5	994.7	990.3
167.5°	1004.4	1001.5	1001.5	1007.8	1003.4
170°	1015.5	1013.0	1012.1	1018.3	1013.0
172.5°	1023.3	1020.8	1019.9	1026.1	1020.8
175°	1029.6	1027.0	1025.2	1031.4	1026.1
177.5°	1033.0	1030.5	1028.6	1033.9	1028.6
180°	1031.4	1031.4	1031.4	1031.4	1031.4

TEST NUMBER: P916856

CATALOG NUMBER: DFN2DIP-PN4F0-060D040US930-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.52	10.50	10.36	11.37	12.44	9.08	10.06	9.92	10.93	12.00
	3H	11.19	12.08	12.04	12.95	14.05	10.70	11.59	11.56	12.46	13.57
	4H	11.78	12.62	12.65	13.50	14.62	11.30	12.14	12.17	13.01	14.13
	6H	12.19	12.97	13.07	13.85	14.98	11.70	12.47	12.58	13.36	14.49
	8H	12.30	13.04	13.19	13.94	15.07	11.81	12.55	12.70	13.45	14.58
	12H	12.36	13.06	13.25	13.96	15.11	11.86	12.56	12.75	13.46	14.61
4H	2H	9.99	10.83	10.87	11.71	12.83	9.64	10.48	10.52	11.36	12.47
	3H	11.87	12.57	12.76	13.48	14.61	11.47	12.17	12.36	13.08	14.21
	4H	12.60	13.23	13.49	14.14	15.30	12.18	12.82	13.07	13.72	14.88
	6H	13.12	13.67	14.03	14.60	15.76	12.70	13.25	13.61	14.18	15.34
	8H	13.27	13.79	14.19	14.71	15.89	12.85	13.36	13.76	14.29	15.46
	12H	13.36	13.82	14.29	14.76	15.94	12.92	13.38	13.85	14.32	15.50
8H	4H	12.80	13.32	13.72	14.24	15.41	12.43	12.95	13.35	13.87	15.04
	6H	13.44	13.87	14.38	14.84	16.01	13.07	13.49	14.01	14.46	15.63
	8H	13.67	14.04	14.62	15.00	16.19	13.28	13.66	14.23	14.62	15.81
	12H	13.81	14.14	14.76	15.09	16.33	13.40	13.74	14.36	14.69	15.93
12H	4H	12.79	13.26	13.73	14.20	15.38	12.43	12.90	13.37	13.84	15.02
	6H	13.47	13.85	14.42	14.81	16.00	13.11	13.49	14.06	14.44	15.63
	8H	13.72	14.06	14.68	15.01	16.25	13.35	13.68	14.31	14.63	15.87