

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916913

Luminaire Tested: DFN2DIP-PN4F0-070D090US930-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916913
REPORT IS A COMBINATION OF REPORTS P901225 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-070D090US930-FLLONL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12914.3 lumens
Efficiency: N/A
Efficacy: 96.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 133.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916913

CATALOG NUMBER: DFN2DIP-PN4F0-070D090US930-FLLONL

Luminous Intensity Polar Plot

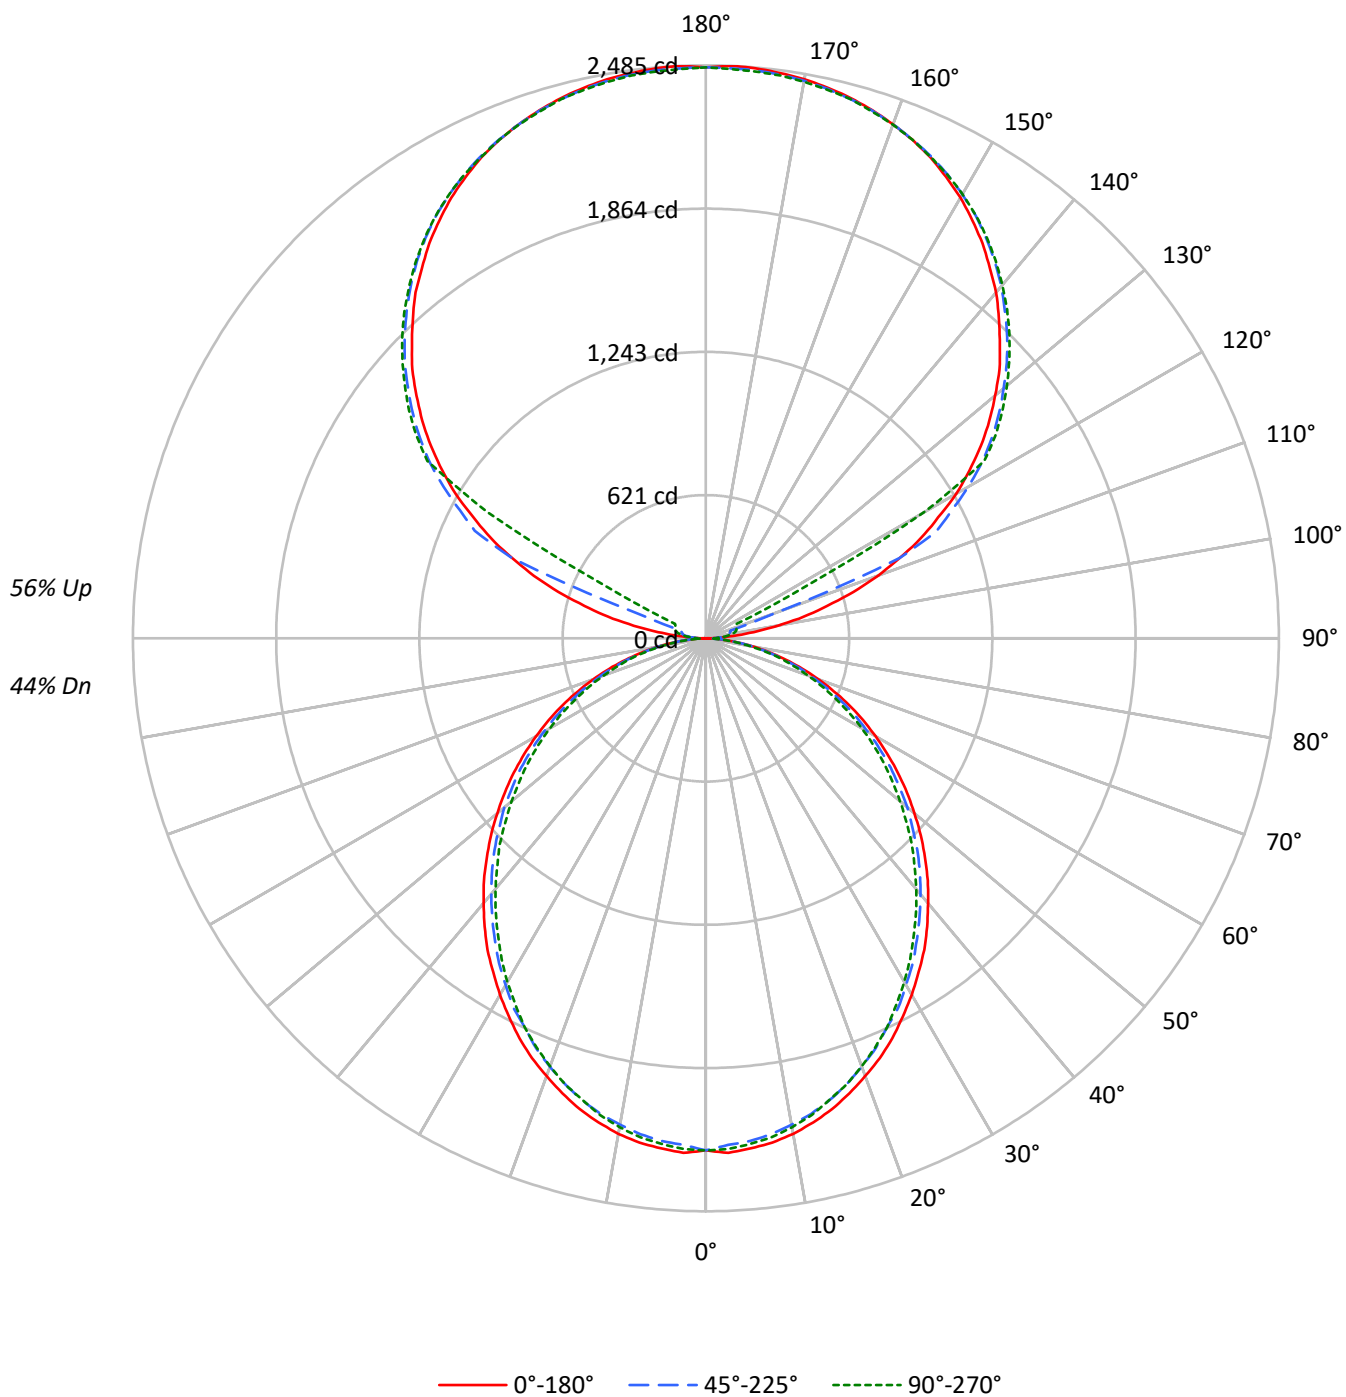

TEST NUMBER: P916913

CATALOG NUMBER: DFN2DIP-PN4F0-070D090US930-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	50	50	50
1	96	92	88	85	88	84	81	78	70	68	66	57	55	54	45	44	43
2	88	80	74	69	80	74	69	64	61	58	54	50	47	45	39	37	36
3	80	71	63	58	73	65	59	54	54	49	46	44	41	38	35	32	31
4	73	63	55	49	67	58	51	45	48	43	39	39	35	32	31	28	26
5	67	56	48	42	61	51	44	39	43	38	33	35	31	28	28	25	23
6	62	50	42	36	56	46	39	34	39	33	29	32	28	25	25	22	20
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	23	20	18
8	53	41	33	28	48	38	31	26	32	27	23	26	22	19	21	18	16
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	20	17	14
10	46	34	27	22	42	32	25	21	27	22	18	22	18	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1621	1621	1621
5°	1624	1599	1609
10°	1610	1577	1588
15°	1587	1552	1554
20°	1555	1516	1520
25°	1523	1473	1480
30°	1483	1433	1429
35°	1445	1386	1375
40°	1399	1338	1323
45°	1352	1290	1271
50°	1302	1240	1210
55°	1248	1182	1155
60°	1188	1114	1091
65°	1123	1043	1015
70°	1040	956	934
75°	924	852	860
80°	785	720	717
85°	568	492	480

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1352 cd/sqm

TEST NUMBER: P916913

CATALOG NUMBER: DFN2DIP-PN4F0-070D090US930-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	209.0	1.6
10°-20°	588.1	4.6
20°-30°	864.2	6.7
30°-40°	1003.7	7.8
40°-50°	1002.5	7.8
50°-60°	874.2	6.8
60°-70°	646.2	5.0
70°-80°	365.6	2.8
80°-90°	100.9	0.8
90°-100°	81.7	0.6
100°-110°	304.4	2.4
110°-120°	807.3	6.3
120°-130°	1339.0	10.4
130°-140°	1422.3	11.0
140°-150°	1321.9	10.2
150°-160°	1062.8	8.2
160°-170°	684.8	5.3
170°-180°	235.7	1.8
0°-30°	1661.3	12.9
0°-40°	2665.1	20.6
0°-60°	4541.7	35.2
0°-90°	5654.4	43.8
90°-120°	1193.4	9.2
90°-150°	5276.6	40.9
90°-180°	7260.0	56.2
0°-180°	12914.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2221	2221	2221	2221	2221	
5°	2221	2212	2189	2206	2202	211
15°	2114	2101	2073	2082	2071	595
25°	1913	1896	1860	1864	1860	880
35°	1651	1629	1595	1582	1572	1031
45°	1343	1328	1296	1273	1264	1037
55°	1016	1004	978	952	942	909
65°	686	673	651	632	621	678
75°	359	355	344	331	335	383
85°	88	85	83	77	75	98
90°	2	22	36	45	48	12
95°	116	57	70	79	77	138
105°	545	599	109	129	136	582
115°	1030	1061	1106	276	147	1014
125°	1457	1480	1514	1527	1532	1299
135°	1803	1831	1847	1866	1862	1393
145°	2091	2089	2120	2132	2123	1308
155°	2303	2287	2308	2319	2304	1061
165°	2426	2416	2421	2433	2421	685
175°	2482	2469	2473	2485	2467	236
180°	2476	2476	2476	2476	2476	

TEST NUMBER: P916913

CATALOG NUMBER: DFN2DIP-PN4F0-070D090US930-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2220.6	2220.6	2220.6	2220.6	2220.6
2.5°	2233.6	2222.9	2199.3	2220.6	2216.6
5°	2220.6	2212.3	2188.7	2205.7	2201.6
7.5°	2205.7	2193.0	2169.4	2186.7	2182.4
10°	2182.4	2167.4	2141.8	2158.8	2152.5
12.5°	2150.2	2137.5	2111.9	2122.5	2118.2
15°	2114.0	2101.3	2073.4	2082.0	2071.3
17.5°	2069.1	2056.4	2028.5	2039.2	2028.5
20°	2019.9	2007.3	1977.3	1983.7	1975.3
22.5°	1971.0	1951.7	1923.9	1923.9	1919.5
25°	1913.3	1896.2	1860.0	1864.1	1860.0
27.5°	1849.1	1834.2	1806.5	1800.2	1789.5
30°	1785.3	1768.0	1736.1	1729.7	1721.1
32.5°	1716.8	1704.1	1669.9	1657.0	1648.4
35°	1650.7	1629.4	1595.1	1582.2	1571.6
37.5°	1575.9	1556.6	1522.4	1507.5	1496.8
40°	1499.1	1481.9	1447.6	1428.6	1420.0
42.5°	1424.3	1407.1	1373.1	1351.6	1338.9
45°	1343.2	1328.3	1296.1	1272.8	1264.1
47.5°	1264.1	1249.2	1215.0	1191.4	1178.8
50°	1180.8	1170.1	1140.2	1110.4	1099.7
52.5°	1099.7	1084.8	1057.1	1033.6	1018.6
55°	1016.5	1003.6	978.0	952.4	941.8
57.5°	933.2	922.5	894.6	869.0	860.5
60°	849.8	841.4	811.5	788.0	781.6
62.5°	768.7	753.7	732.5	711.2	702.5
65°	685.6	672.6	651.3	632.1	621.4
67.5°	600.1	589.3	570.2	555.3	546.7
70°	521.1	512.5	493.2	478.3	469.9
72.5°	439.9	431.4	420.7	405.8	399.4
75°	358.6	354.6	343.6	331.0	335.3
77.5°	286.2	277.5	273.2	266.8	260.6
80°	213.6	211.4	207.1	200.7	196.4
82.5°	145.2	145.2	143.2	134.6	134.6
85°	87.5	85.4	83.4	76.8	74.8
87.5°	38.5	34.2	29.9	23.6	21.3
90°	1.7	21.5	35.7	44.9	48.3
92.5°	44.9	37.7	43.0	46.6	48.3
95°	116.4	57.2	69.8	78.9	77.0
97.5°	209.6	62.8	91.3	96.8	98.5
100°	317.2	71.7	102.2	116.4	120.0
102.5°	435.4	431.9	105.7	125.3	130.9
105°	544.7	598.6	109.3	129.0	136.2
107.5°	672.0	716.6	113.0	132.6	139.8
110°	793.9	831.4	313.6	134.4	141.5

TEST NUMBER: P916913

CATALOG NUMBER: DFN2DIP-PN4F0-070D090US930-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	908.6	940.7	910.3	137.9	143.4
115°	1030.3	1060.7	1105.6	276.0	147.0
117.5°	1136.0	1171.8	1202.4	946.1	476.6
120°	1254.3	1281.2	1313.5	1335.0	1093.1
122.5°	1354.6	1383.3	1419.3	1429.9	1431.8
125°	1456.7	1480.1	1514.2	1526.7	1532.0
127.5°	1549.9	1575.0	1602.1	1619.9	1621.6
130°	1637.8	1666.6	1686.1	1705.8	1704.2
132.5°	1727.4	1750.8	1770.3	1786.6	1784.9
135°	1802.7	1831.4	1847.4	1865.5	1861.9
137.5°	1881.5	1902.9	1921.0	1938.9	1933.6
140°	1958.4	1972.9	1992.5	2008.7	1999.8
142.5°	2023.2	2035.7	2058.9	2073.1	2064.3
145°	2091.2	2089.3	2119.8	2132.3	2123.4
147.5°	2150.2	2144.9	2175.3	2184.3	2177.2
150°	2207.7	2195.1	2223.8	2234.4	2225.5
152.5°	2255.9	2241.7	2268.5	2279.3	2266.8
155°	2302.6	2286.6	2308.0	2318.7	2304.4
157.5°	2340.2	2326.0	2342.1	2354.7	2340.2
160°	2372.5	2361.7	2372.5	2383.2	2370.6
162.5°	2401.1	2390.4	2399.3	2411.9	2395.8
165°	2426.2	2415.5	2420.9	2433.4	2420.9
167.5°	2446.0	2435.1	2440.6	2453.2	2437.0
170°	2462.1	2451.3	2454.9	2467.4	2451.3
172.5°	2472.8	2462.1	2465.7	2478.3	2462.1
175°	2481.7	2469.1	2472.8	2485.3	2467.4
177.5°	2485.3	2472.8	2474.7	2487.2	2471.1
180°	2476.4	2476.4	2476.4	2476.4	2476.4

TEST NUMBER: P916913

CATALOG NUMBER: DFN2DIP-PN4F0-070D090US930-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.35	9.16	9.36	10.18	11.54	7.91	8.72	8.92	9.74	11.10
	3H	10.01	10.74	11.03	11.77	13.14	9.53	10.25	10.55	11.28	12.66
	4H	10.60	11.29	11.63	12.32	13.70	10.11	10.80	11.14	11.83	13.21
	6H	11.00	11.63	12.04	12.67	14.06	10.51	11.14	11.55	12.17	13.57
	8H	11.10	11.71	12.15	12.76	14.15	10.61	11.21	11.66	12.26	13.66
	12H	11.15	11.72	12.20	12.77	14.19	10.65	11.22	11.70	12.27	13.69
4H	2H	8.81	9.50	9.85	10.53	11.91	8.46	9.14	9.50	10.17	11.56
	3H	10.67	11.25	11.72	12.30	13.70	10.27	10.84	11.32	11.90	13.30
	4H	11.39	11.91	12.44	12.96	14.38	10.97	11.49	12.02	12.54	13.97
	6H	11.90	12.35	12.97	13.43	14.84	11.48	11.93	12.54	13.00	14.42
	8H	12.05	12.47	13.12	13.54	14.97	11.62	12.05	12.69	13.11	14.54
	12H	12.12	12.51	13.21	13.59	15.02	11.68	12.07	12.77	13.15	14.58
8H	4H	11.58	12.00	12.64	13.07	14.50	11.21	11.63	12.27	12.70	14.13
	6H	12.21	12.56	13.30	13.67	15.10	11.84	12.18	12.92	13.29	14.72
	8H	12.43	12.74	13.53	13.83	15.28	12.05	12.36	13.14	13.45	14.89
	12H	12.57	12.83	13.66	13.92	15.41	12.16	12.43	13.26	13.52	15.01
12H	4H	11.56	11.94	12.64	13.02	14.46	11.20	11.58	12.28	12.66	14.10
	6H	12.24	12.55	13.34	13.64	15.09	11.88	12.18	12.97	13.27	14.72
	8H	12.48	12.75	13.58	13.84	15.33	12.11	12.38	13.21	13.47	14.95

END OF REPORT