

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916937

Luminaire Tested: DFN2DIP-PN4F0-080D060US930-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916937
REPORT IS A COMBINATION OF REPORTS P901173 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-080D060US930-FLLONL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11300.0 lumens
Efficiency: N/A
Efficacy: 92.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 122.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916937

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US930-FLLONL

Luminous Intensity Polar Plot

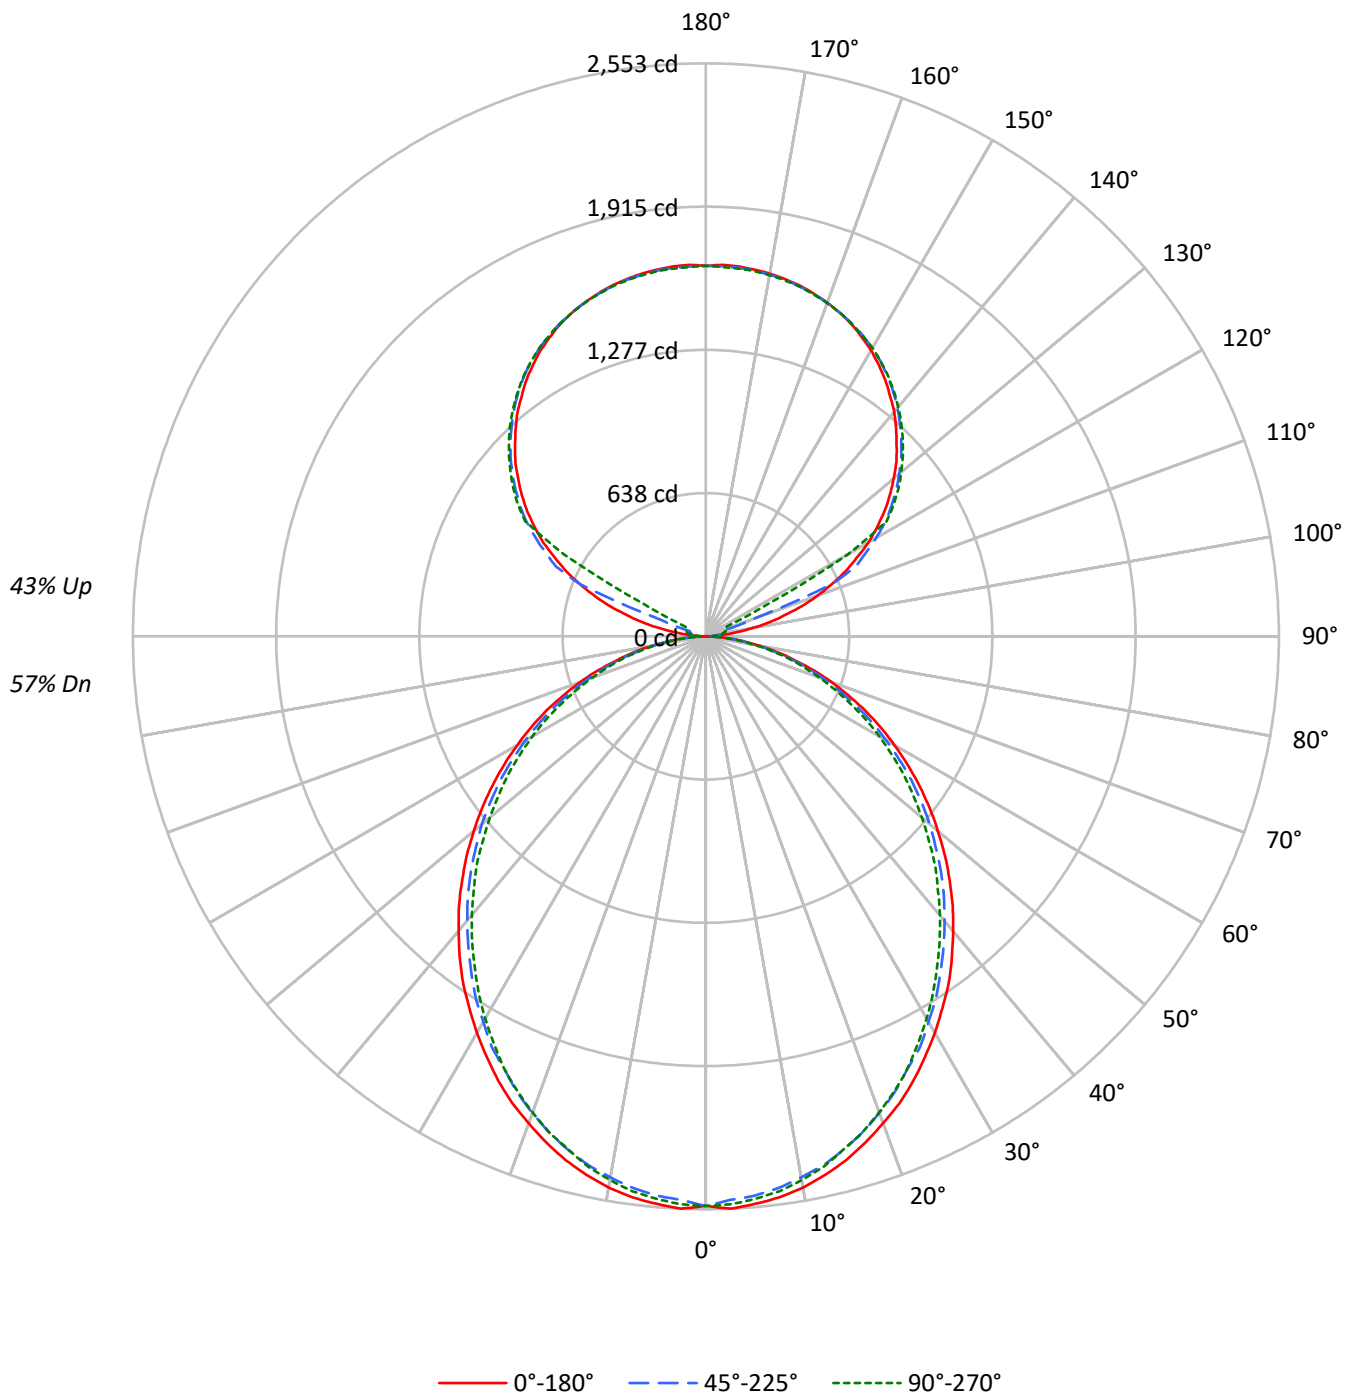

TEST NUMBER: P916937

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US930-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	109	109	109	109		101	101	101	101		87	87	87		74	74	74		63	63	63
1	99	95	91	88		92	89	85	82		77	74	72		66	64	62		55	54	53
2	91	83	77	72		84	77	72	67		67	63	59		58	55	52		49	47	45
3	83	73	66	60		77	68	62	56		59	54	50		51	47	44		43	40	38
4	76	65	57	50		70	61	53	48		53	47	43		45	41	38		39	35	33
5	69	58	49	43		64	54	47	41		47	41	37		41	36	33		35	31	29
6	64	52	44	38		59	49	41	36		43	37	32		37	32	29		32	28	25
7	59	47	39	33		55	44	37	31		39	33	28		34	29	25		29	25	22
8	55	43	35	29		51	40	33	28		35	29	25		31	26	23		27	23	20
9	51	39	31	26		48	37	30	25		32	27	23		28	24	20		25	21	18
10	48	36	28	24		45	34	27	22		30	24	20		26	22	18		23	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1853	1853	1853
5°	1856	1827	1839
10°	1841	1803	1815
15°	1813	1773	1776
20°	1777	1732	1737
25°	1740	1683	1691
30°	1695	1638	1633
35°	1652	1584	1571
40°	1599	1529	1513
45°	1545	1475	1453
50°	1487	1418	1383
55°	1427	1351	1319
60°	1358	1273	1246
65°	1283	1192	1160
70°	1188	1093	1068
75°	1056	974	983
80°	897	823	820
85°	649	562	548

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1545 cd/sqm

TEST NUMBER: P916937

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US930-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	238.9	2.1
10°-20°	672.1	5.9
20°-30°	987.7	8.7
30°-40°	1147.1	10.2
40°-50°	1145.7	10.1
50°-60°	999.0	8.8
60°-70°	738.5	6.5
70°-80°	417.8	3.7
80°-90°	113.2	1.0
90°-100°	54.4	0.5
100°-110°	202.9	1.8
110°-120°	538.2	4.8
120°-130°	892.7	7.9
130°-140°	948.2	8.4
140°-150°	881.3	7.8
150°-160°	708.5	6.3
160°-170°	456.5	4.0
170°-180°	157.1	1.4
0°-30°	1898.6	16.8
0°-40°	3045.8	27.0
0°-60°	5190.5	45.9
0°-90°	6460.1	57.2
90°-120°	795.6	7.0
90°-150°	3517.8	31.1
90°-180°	4840.0	42.8
0°-180°	11300.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2538	2538	2538	2538	2538	
5°	2538	2528	2501	2521	2516	241
15°	2416	2402	2370	2379	2367	680
25°	2186	2167	2126	2130	2126	1006
35°	1886	1862	1823	1808	1796	1178
45°	1535	1518	1481	1455	1445	1185
55°	1162	1147	1118	1088	1076	1039
65°	784	769	744	722	710	775
75°	410	405	393	378	383	438
85°	100	98	95	88	85	112
90°	1	14	24	30	32	10
95°	78	38	47	53	51	92
105°	363	399	73	86	91	388
115°	687	707	737	184	98	676
125°	971	987	1009	1018	1021	866
135°	1202	1221	1232	1244	1241	928
145°	1394	1393	1413	1422	1416	872
155°	1535	1524	1539	1546	1536	707
165°	1618	1610	1614	1622	1614	457
175°	1654	1646	1648	1657	1645	157
180°	1651	1651	1651	1651	1651	

TEST NUMBER: P916937

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US930-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2537.9	2537.9	2537.9	2537.9	2537.9
2.5°	2552.6	2540.5	2513.6	2537.9	2533.2
5°	2537.9	2528.3	2501.4	2520.8	2516.2
7.5°	2520.8	2506.3	2479.4	2499.1	2494.2
10°	2494.2	2477.0	2447.8	2467.2	2460.0
12.5°	2457.4	2442.9	2413.6	2425.8	2420.9
15°	2416.0	2401.5	2369.6	2379.4	2367.3
17.5°	2364.7	2350.2	2318.3	2330.5	2318.3
20°	2308.5	2294.0	2259.8	2267.1	2257.5
22.5°	2252.6	2230.6	2198.7	2198.7	2193.8
25°	2186.5	2167.1	2125.7	2130.4	2125.7
27.5°	2113.3	2096.2	2064.6	2057.3	2045.2
30°	2040.3	2020.6	1984.1	1976.9	1967.0
32.5°	1962.1	1947.6	1908.5	1893.7	1883.9
35°	1886.4	1862.1	1823.0	1808.2	1796.1
37.5°	1801.0	1779.0	1739.9	1722.8	1710.7
40°	1713.3	1693.5	1654.5	1632.7	1622.9
42.5°	1627.8	1608.1	1569.3	1544.7	1530.2
45°	1535.1	1518.0	1481.2	1454.6	1444.8
47.5°	1444.8	1427.7	1388.5	1361.6	1347.1
50°	1349.5	1337.3	1303.1	1268.9	1256.8
52.5°	1256.8	1239.7	1208.1	1181.2	1164.1
55°	1161.7	1147.0	1117.8	1088.5	1076.3
57.5°	1066.5	1054.3	1022.5	993.2	983.3
60°	971.2	961.6	927.4	900.5	893.2
62.5°	878.5	861.4	837.1	812.8	802.9
65°	783.5	768.7	744.4	722.4	710.2
67.5°	685.8	673.4	651.7	634.6	624.8
70°	595.5	585.6	563.7	546.6	537.0
72.5°	502.8	493.0	480.8	463.7	456.5
75°	409.9	405.2	392.8	378.3	383.2
77.5°	327.0	317.2	312.3	305.0	297.7
80°	244.2	241.6	236.7	229.4	224.5
82.5°	166.0	166.0	163.6	153.8	153.8
85°	100.0	97.6	95.3	87.8	85.4
87.5°	44.0	39.1	34.2	26.9	24.4
90°	1.1	14.3	23.8	29.9	32.2
92.5°	29.9	25.1	28.6	31.1	32.2
95°	77.6	38.2	46.6	52.7	51.4
97.5°	139.7	41.8	60.8	64.6	65.7
100°	211.5	47.8	68.1	77.6	80.0
102.5°	290.2	288.0	70.5	83.6	87.2
105°	363.1	399.0	72.9	85.9	90.8
107.5°	448.0	477.8	75.3	88.4	93.2
110°	529.3	554.2	209.1	89.7	94.3

TEST NUMBER: P916937

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US930-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	605.7	627.1	606.8	91.9	95.6
115°	686.9	707.2	737.1	184.0	98.0
117.5°	757.3	781.2	801.6	630.7	317.7
120°	836.3	854.1	875.7	890.0	728.7
122.5°	903.0	922.2	946.2	953.2	954.6
125°	971.2	986.8	1009.4	1017.8	1021.3
127.5°	1033.3	1050.0	1068.0	1079.9	1081.1
130°	1091.8	1111.0	1124.1	1137.3	1136.1
132.5°	1151.6	1167.2	1180.2	1191.0	1189.8
135°	1201.8	1221.0	1231.6	1243.7	1241.2
137.5°	1254.3	1268.6	1280.7	1292.6	1289.1
140°	1305.6	1315.3	1328.4	1339.1	1333.2
142.5°	1348.7	1357.1	1372.6	1382.1	1376.1
145°	1394.2	1392.9	1413.2	1421.6	1415.6
147.5°	1433.5	1429.9	1450.2	1456.1	1451.5
150°	1471.8	1463.4	1482.5	1489.6	1483.7
152.5°	1504.0	1494.4	1512.3	1519.6	1511.2
155°	1535.0	1524.4	1538.7	1545.8	1536.3
157.5°	1560.2	1550.6	1561.4	1569.8	1560.2
160°	1581.7	1574.4	1581.7	1588.8	1580.5
162.5°	1600.7	1593.6	1599.5	1607.9	1597.2
165°	1617.5	1610.4	1613.9	1622.3	1613.9
167.5°	1630.6	1623.4	1627.1	1635.5	1624.6
170°	1641.4	1634.2	1636.6	1644.9	1634.2
172.5°	1648.5	1641.4	1643.8	1652.2	1641.4
175°	1654.5	1646.1	1648.5	1656.8	1644.9
177.5°	1656.8	1648.5	1649.8	1658.2	1647.4
180°	1650.9	1650.9	1650.9	1650.9	1650.9

TEST NUMBER: P916937

CATALOG NUMBER: DFN2DIP-PN4F0-080D060US930-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.06	10.99	10.95	11.90	13.07	9.62	10.55	10.51	11.46	12.63
	3H	11.73	12.56	12.63	13.48	14.67	11.24	12.08	12.15	13.00	14.19
	4H	12.32	13.11	13.24	14.04	15.23	11.83	12.62	12.75	13.55	14.75
	6H	12.72	13.45	13.66	14.39	15.60	12.23	12.96	13.16	13.89	15.11
	8H	12.83	13.53	13.77	14.48	15.69	12.34	13.03	13.28	13.98	15.19
	12H	12.88	13.54	13.83	14.49	15.73	12.38	13.04	13.33	13.99	15.23
4H	2H	10.53	11.32	11.45	12.24	13.44	10.18	10.97	11.10	11.89	13.09
	3H	12.40	13.06	13.34	14.02	15.23	12.00	12.66	12.94	13.62	14.83
	4H	13.12	13.72	14.07	14.68	15.92	12.70	13.31	13.65	14.26	15.50
	6H	13.64	14.16	14.60	15.14	16.38	13.22	13.74	14.18	14.72	15.95
	8H	13.80	14.28	14.76	15.25	16.51	13.37	13.85	14.33	14.82	16.08
	12H	13.88	14.31	14.86	15.30	16.56	13.43	13.87	14.42	14.86	16.12
8H	4H	13.32	13.81	14.29	14.78	16.03	12.95	13.44	13.92	14.41	15.66
	6H	13.96	14.36	14.95	15.38	16.63	13.59	13.99	14.57	15.00	16.25
	8H	14.19	14.54	15.18	15.54	16.81	13.80	14.16	14.80	15.16	16.43
	12H	14.32	14.63	15.32	15.63	16.95	13.92	14.23	14.92	15.23	16.54
12H	4H	13.31	13.75	14.29	14.74	16.00	12.95	13.39	13.93	14.38	15.63
	6H	13.99	14.35	14.99	15.35	16.62	13.63	13.98	14.62	14.98	16.25
	8H	14.24	14.55	15.24	15.55	16.86	13.87	14.18	14.87	15.17	16.49