

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916999

Luminaire Tested: DFN2DIP-PN4F0-090D120US930-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916999
REPORT IS A COMBINATION OF REPORTS P901284 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-090D120US930-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15922.8 lumens
Efficiency: N/A
Efficacy: 83.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 191.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916999

CATALOG NUMBER: DFN2DIP-PN4F0-090D120US930-RLLONL

Luminous Intensity Polar Plot

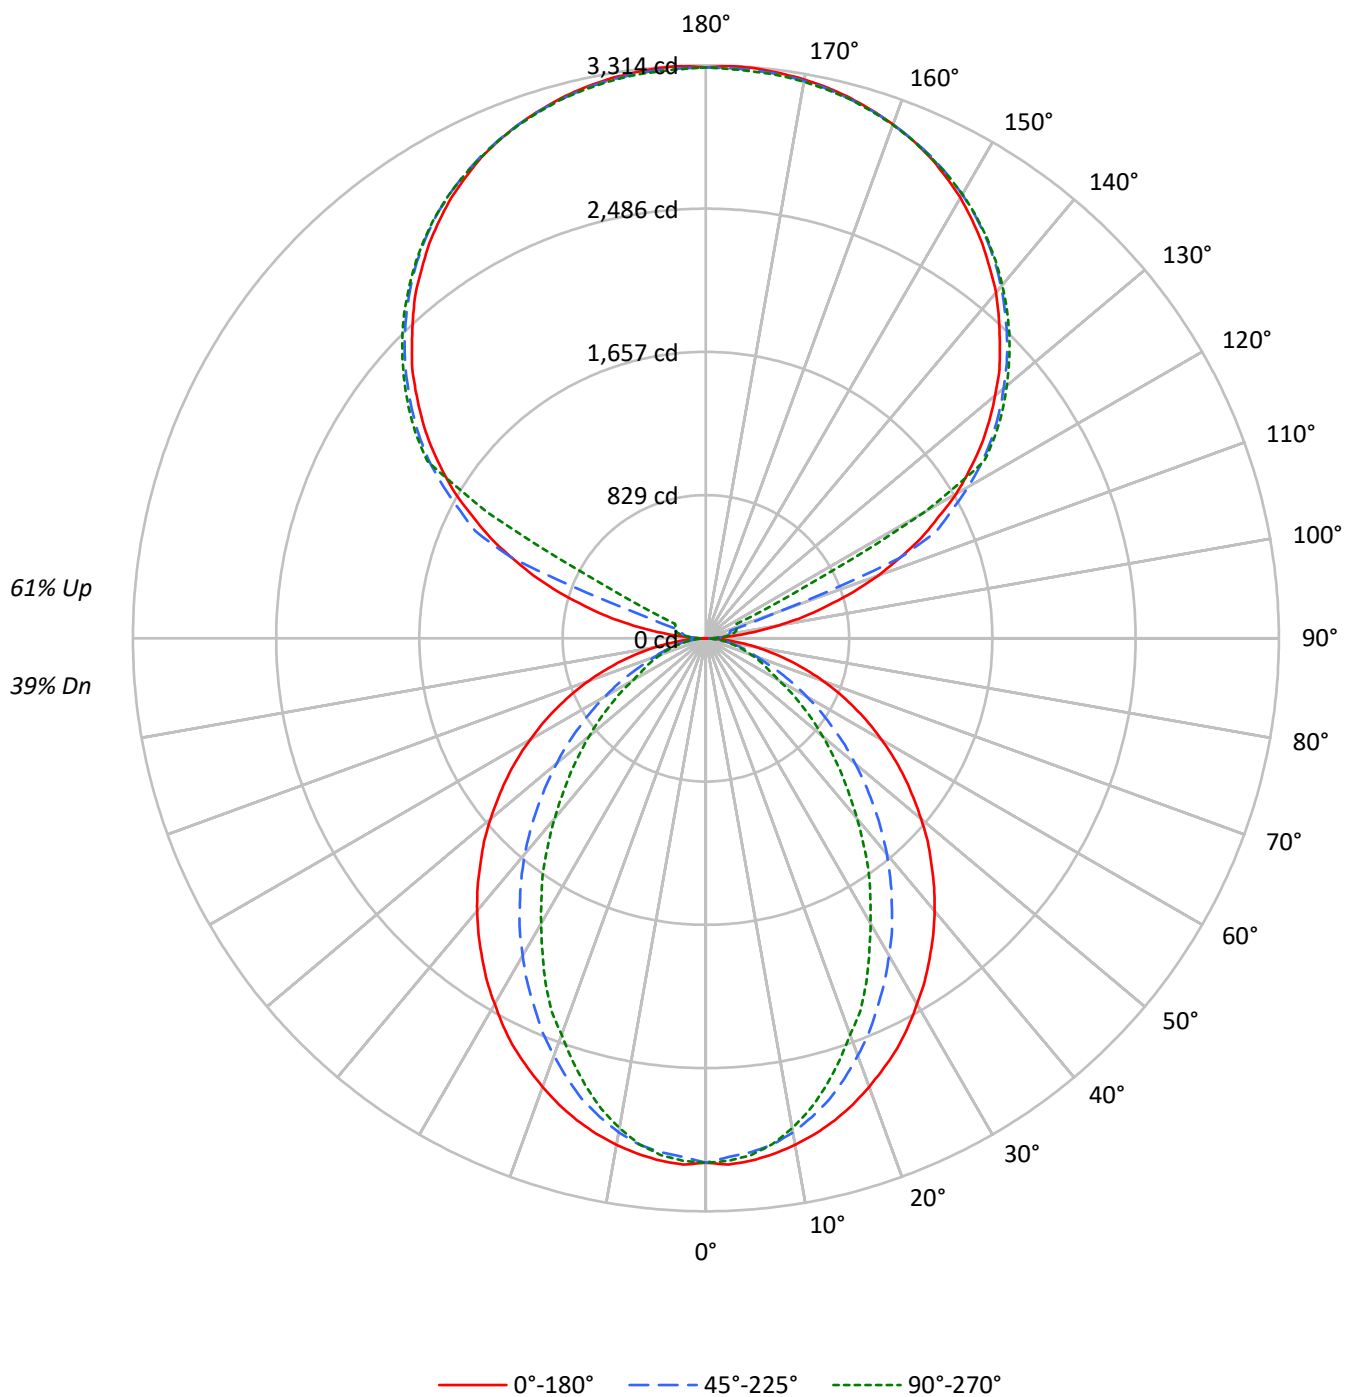

TEST NUMBER: P916999

CATALOG NUMBER: DFN2DIP-PN4F0-090D120US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46
1	96	92	88	85	87	83	80	78	68	66	64	54	53	52	41	41	40
2	87	80	75	70	79	73	68	64	60	57	54	48	46	44	37	35	34
3	80	71	64	58	73	65	59	54	53	49	46	43	40	37	33	31	29
4	73	63	55	50	67	58	51	46	48	43	39	38	35	32	30	27	26
5	67	56	48	43	61	52	45	40	43	38	34	35	31	28	27	25	23
6	62	51	43	37	56	46	40	35	39	34	30	31	28	25	25	22	20
7	57	46	38	33	52	42	35	31	35	30	26	29	25	22	23	20	18
8	53	42	34	29	49	38	32	27	32	27	23	26	22	20	21	18	16
9	50	38	31	26	45	35	29	24	29	24	21	24	20	18	19	17	15
10	46	35	28	23	42	32	26	22	27	22	19	22	19	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2214	2214	2214
5°	2217	2179	2193
10°	2195	2136	2122
15°	2165	2066	2012
20°	2125	1969	1877
25°	2084	1860	1747
30°	2029	1749	1581
35°	1975	1628	1436
40°	1921	1504	1269
45°	1857	1366	1117
50°	1791	1227	970
55°	1722	1078	828
60°	1643	923	682
65°	1551	764	614
70°	1440	617	556
75°	1301	544	507
80°	1099	458	441
85°	765	307	334

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1857 cd/sqm

TEST NUMBER: P916999

CATALOG NUMBER: DFN2DIP-PN4F0-090D120US930-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	284.2	1.8
10°-20°	780.3	4.9
20°-30°	1095.5	6.9
30°-40°	1194.1	7.5
40°-50°	1097.5	6.9
50°-60°	861.9	5.4
60°-70°	561.0	3.5
70°-80°	288.8	1.8
80°-90°	79.5	0.5
90°-100°	108.9	0.7
100°-110°	405.9	2.5
110°-120°	1076.4	6.8
120°-130°	1785.3	11.2
130°-140°	1896.5	11.9
140°-150°	1762.5	11.1
150°-160°	1417.0	8.9
160°-170°	913.1	5.7
170°-180°	314.3	2.0
0°-30°	2159.9	13.6
0°-40°	3354.0	21.1
0°-60°	5313.5	33.4
0°-90°	6242.9	39.2
90°-120°	1591.2	10.0
90°-150°	7035.5	44.2
90°-180°	9680.0	60.8
0°-180°	15922.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3033	3033	3033	3033	3033	
5°	3033	3019	2983	3008	3000	288
15°	2884	2854	2761	2709	2682	813
25°	2618	2530	2349	2237	2196	1204
35°	2256	2116	1875	1702	1641	1412
45°	1844	1660	1372	1177	1111	1424
55°	1402	1188	892	727	675	1253
65°	947	724	478	384	376	939
75°	505	313	220	200	198	534
85°	118	60	52	52	52	135
90°	2	29	48	60	64	15
95°	155	76	93	105	103	184
105°	726	798	146	172	182	776
115°	1374	1414	1474	368	196	1352
125°	1942	1974	2019	2036	2043	1732
135°	2404	2442	2463	2487	2482	1857
145°	2788	2786	2826	2843	2831	1744
155°	3070	3049	3077	3092	3073	1415
165°	3235	3221	3228	3245	3228	914
175°	3309	3292	3297	3314	3290	315
180°	3302	3302	3302	3302	3302	

TEST NUMBER: P916999

CATALOG NUMBER: DFN2DIP-PN4F0-090D120US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3032.7	3032.7	3032.7	3032.7	3032.7
2.5°	3046.4	3032.7	3002.3	3030.1	3024.5
5°	3032.7	3019.0	2983.2	3007.9	2999.7
7.5°	3007.9	2991.6	2953.2	2963.9	2950.2
10°	2975.0	2955.8	2901.1	2892.6	2876.3
12.5°	2933.9	2909.2	2835.0	2818.6	2788.3
15°	2884.4	2854.2	2761.0	2708.8	2681.5
17.5°	2826.8	2782.9	2667.5	2607.2	2563.3
20°	2761.0	2706.0	2568.8	2500.4	2439.8
22.5°	2689.7	2626.5	2467.2	2374.0	2333.0
25°	2618.3	2530.4	2349.3	2236.9	2195.5
27.5°	2533.3	2439.8	2239.5	2110.5	2047.3
30°	2442.7	2338.2	2118.6	1978.9	1904.6
32.5°	2354.7	2228.4	2003.6	1838.8	1770.1
35°	2256.1	2116.0	1874.6	1701.7	1641.1
37.5°	2160.0	2008.9	1753.8	1564.2	1495.8
40°	2058.4	1893.9	1627.4	1432.6	1361.3
42.5°	1954.1	1778.6	1501.3	1298.1	1229.6
45°	1844.4	1660.4	1372.3	1177.2	1111.4
47.5°	1740.1	1545.3	1248.9	1053.8	993.5
50°	1624.8	1430.0	1128.0	938.5	881.1
52.5°	1512.1	1306.3	1012.8	831.6	779.5
55°	1402.3	1188.3	891.9	727.4	675.2
57.5°	1290.0	1070.4	785.1	631.3	587.3
60°	1174.6	955.0	672.4	532.6	488.6
62.5°	1062.3	842.7	576.3	444.7	422.8
65°	946.9	724.5	477.5	384.3	375.9
67.5°	837.1	614.7	384.3	337.5	329.3
70°	721.9	507.8	318.3	290.9	279.8
72.5°	612.0	408.8	266.1	244.3	238.8
75°	504.9	312.7	219.6	200.3	197.7
77.5°	398.0	222.2	172.9	161.9	156.4
80°	299.1	159.3	131.6	120.8	120.8
82.5°	208.5	107.1	90.6	85.0	85.0
85°	117.9	60.3	52.1	52.1	52.1
87.5°	43.9	21.8	21.8	19.2	19.2
90°	2.3	28.6	47.7	59.8	64.4
92.5°	59.8	50.2	57.3	62.1	64.4
95°	155.2	76.3	93.0	105.3	102.7
97.5°	279.5	83.7	121.7	129.1	131.3
100°	423.0	95.6	136.2	155.2	160.0
102.5°	580.5	575.9	141.0	167.1	174.5
105°	726.3	798.1	145.9	171.9	181.6
107.5°	895.9	955.5	150.7	176.8	186.4
110°	1058.5	1108.5	418.2	179.3	188.7

TEST NUMBER: P916999

CATALOG NUMBER: DFN2DIP-PN4F0-090D120US930-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1211.5	1254.3	1213.7	183.8	191.2
115°	1373.7	1414.3	1474.1	367.9	196.1
117.5°	1514.7	1562.4	1603.3	1261.3	635.5
120°	1672.5	1708.2	1751.3	1780.0	1457.4
122.5°	1806.1	1844.4	1892.4	1906.6	1909.1
125°	1942.3	1973.5	2018.9	2035.6	2042.7
127.5°	2066.5	2100.0	2136.1	2159.9	2162.2
130°	2183.7	2222.0	2248.1	2274.5	2272.2
132.5°	2303.1	2334.4	2360.5	2382.1	2379.8
135°	2403.6	2441.9	2463.2	2487.3	2482.5
137.5°	2508.6	2537.2	2561.3	2585.1	2578.1
140°	2611.3	2630.6	2656.6	2678.3	2666.4
142.5°	2697.5	2714.3	2745.2	2764.2	2752.3
145°	2788.3	2785.8	2826.3	2843.1	2831.1
147.5°	2866.9	2859.8	2900.4	2912.3	2903.0
150°	2943.5	2926.8	2965.1	2979.3	2967.4
152.5°	3007.9	2988.9	3024.7	3039.1	3022.4
155°	3070.0	3048.7	3077.4	3091.6	3072.6
157.5°	3120.2	3101.2	3122.8	3139.6	3120.2
160°	3163.4	3148.9	3163.4	3177.5	3160.8
162.5°	3201.4	3187.2	3199.1	3215.9	3194.3
165°	3234.9	3220.7	3227.8	3244.6	3227.8
167.5°	3261.3	3246.8	3254.2	3270.9	3249.4
170°	3282.8	3268.4	3273.2	3289.9	3268.4
172.5°	3297.0	3282.8	3287.7	3304.4	3282.8
175°	3308.9	3292.2	3297.0	3313.8	3289.9
177.5°	3313.8	3297.0	3299.6	3316.3	3294.8
180°	3301.9	3301.9	3301.9	3301.9	3301.9

TEST NUMBER: P916999

CATALOG NUMBER: DFN2DIP-PN4F0-090D120US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.82	9.57	9.87	10.62	12.04	4.78	5.53	5.83	6.58	8.00
	3H	10.49	11.16	11.55	12.22	13.66	5.96	6.63	7.02	7.69	9.13
	4H	11.10	11.73	12.17	12.79	14.24	6.41	7.05	7.48	8.11	9.55
	6H	11.52	12.10	12.60	13.17	14.62	6.73	7.31	7.81	8.38	9.84
	8H	11.64	12.20	12.73	13.28	14.73	6.82	7.37	7.90	8.45	9.91
	12H	11.70	12.23	12.79	13.31	14.78	6.86	7.39	7.95	8.46	9.94
4H	2H	8.82	9.46	9.90	10.52	11.97	5.37	6.00	6.45	7.06	8.51
	3H	10.65	11.18	11.74	12.27	13.72	6.71	7.24	7.80	8.33	9.79
	4H	11.34	11.82	12.43	12.90	14.38	7.26	7.74	8.35	8.82	10.30
	6H	11.85	12.27	12.95	13.37	14.85	7.67	8.09	8.77	9.19	10.66
	8H	12.03	12.42	13.13	13.51	15.00	7.80	8.19	8.90	9.28	10.77
	12H	12.12	12.47	13.24	13.58	15.07	7.86	8.21	8.98	9.32	10.81
8H	4H	11.30	11.69	12.40	12.78	14.27	7.53	7.92	8.63	9.02	10.50
	6H	11.87	12.19	12.99	13.33	14.81	8.05	8.37	9.17	9.51	10.99
	8H	12.09	12.37	13.21	13.49	14.99	8.24	8.52	9.37	9.64	11.15
	12H	12.22	12.47	13.35	13.58	15.13	8.36	8.60	9.49	9.72	11.26
12H	4H	11.25	11.60	12.37	12.71	14.20	7.54	7.89	8.65	8.99	10.49
	6H	11.84	12.12	12.97	13.24	14.75	8.10	8.38	9.23	9.50	11.00
	8H	12.06	12.31	13.19	13.42	14.97	8.31	8.55	9.44	9.67	11.21